

Lyncus<sup>TM</sup>  
Change to today



# TIME TO CHANGE TO TODAY

LIKE YOUR HOMES ALREADY HAVE

 **legrand**<sup>®</sup>  
LIVE THE ADVANTAGE



LYNC

THE NEW

FROM

LEGRAND

# U S , R A N G E

Our homes are changing at a speed like never before. What's cutting edge today is outdated tomorrow. In this landscape, Legrand is developing ever new technologies and bringing them to consumers.

In labs across the world, Legrand is always busy researching and developing new products in electrical and digital building infrastructure. More than 5% of our budgets are dedicated to this goal. And because our customers need products that go beyond technology, that bring design value as well, our focus is on both. We call it Designeering.

Our new Lyncus range is a culmination of all these values. The sleek minimalist look is perfectly in sync with the technology that sets this range apart. Easy to install, easy to use and easy on the eyes. In other words, welcome to a range tailor made for your modern home.



# CLEAN AND MINIMAL WITH JUST A TOUCH OF QUIRK



Today's homes need a range that mirrors their look. A modern sleek look with clean lines. A look that is chic and futuristic. Our new Lyncus range brings this aesthetic to your home, but with a subtle touch that adds character to every room.







# TOUCH THE PERFECTI

Touch switches  
that are sensitive  
to your every whim



Touch Fan Regulator



Touch Bell Push




Touch Switch

ON

NO CLICKS, NO CLACKS,  
JUST SMOOTH OPERATING.



Universal Touch Dimmer

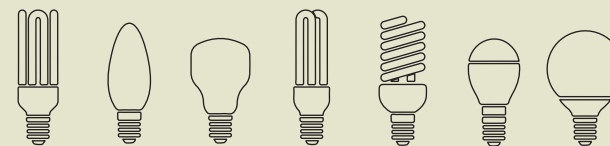

Universal Dimmer for all types  
of dimmable loads including LED



Combi Twin USB

Twin USB Charger  
for both type A  
and type C USBs



# SAY GOODBYE TO PLUGS

Today's homes have so many more gadgets per person than before. That's why you'll find these USB chargers very convenient. Now you can charge 3 gadgets at the same time.





Wireless Induction Charger\*

# SAY GOODBYE TO WIRES



Say hello to our new wireless Induction Charger. All you have to do is slip your phone in and charging begins automatically. It also has a built-in USB port. So you can charge other devices like your tablet or your Bluetooth speaker while charging your phone. No more tangled wires and lost plugs!

\*Only charges compatible phones with induction receiver technology



THE SPEAKER CAN BE EMBEDDED IN THE CEILING  
AND RESPONDS TO THE BLUETOOTH RECEIVER.



Bluetooth Receiver



Ceiling Loud Speaker



# BLUETOOTH IS THE NEW MANTRA

The bluetooth receiver connects your phone or your laptop to the speaker so you can play music from anywhere in your home.



Reading Light

# SHINE ON ME

Sleek, hardy, ready to turn smoothly in any direction of your choice.



**THIS REMOTE LETS YOU CONTROL 4 LIGHTS  
AND 1 FAN WITHOUT TAKING ANY TROUBLE.**

# DON'T GET UP



Remote Control Unit



Any four lights can be controlled with this remote, one at a time or all together.



One fan can be switched on or off and its speed can be increased or decreased.








Our new rockers come with a signature pinch that amplifies the aesthetics of your home - that are a cut above the rest, quite literally.



# ROCKERS WITH A TWIST



**THE RANGE  
YOUR BEST GIZMOS  
DESERVE.**

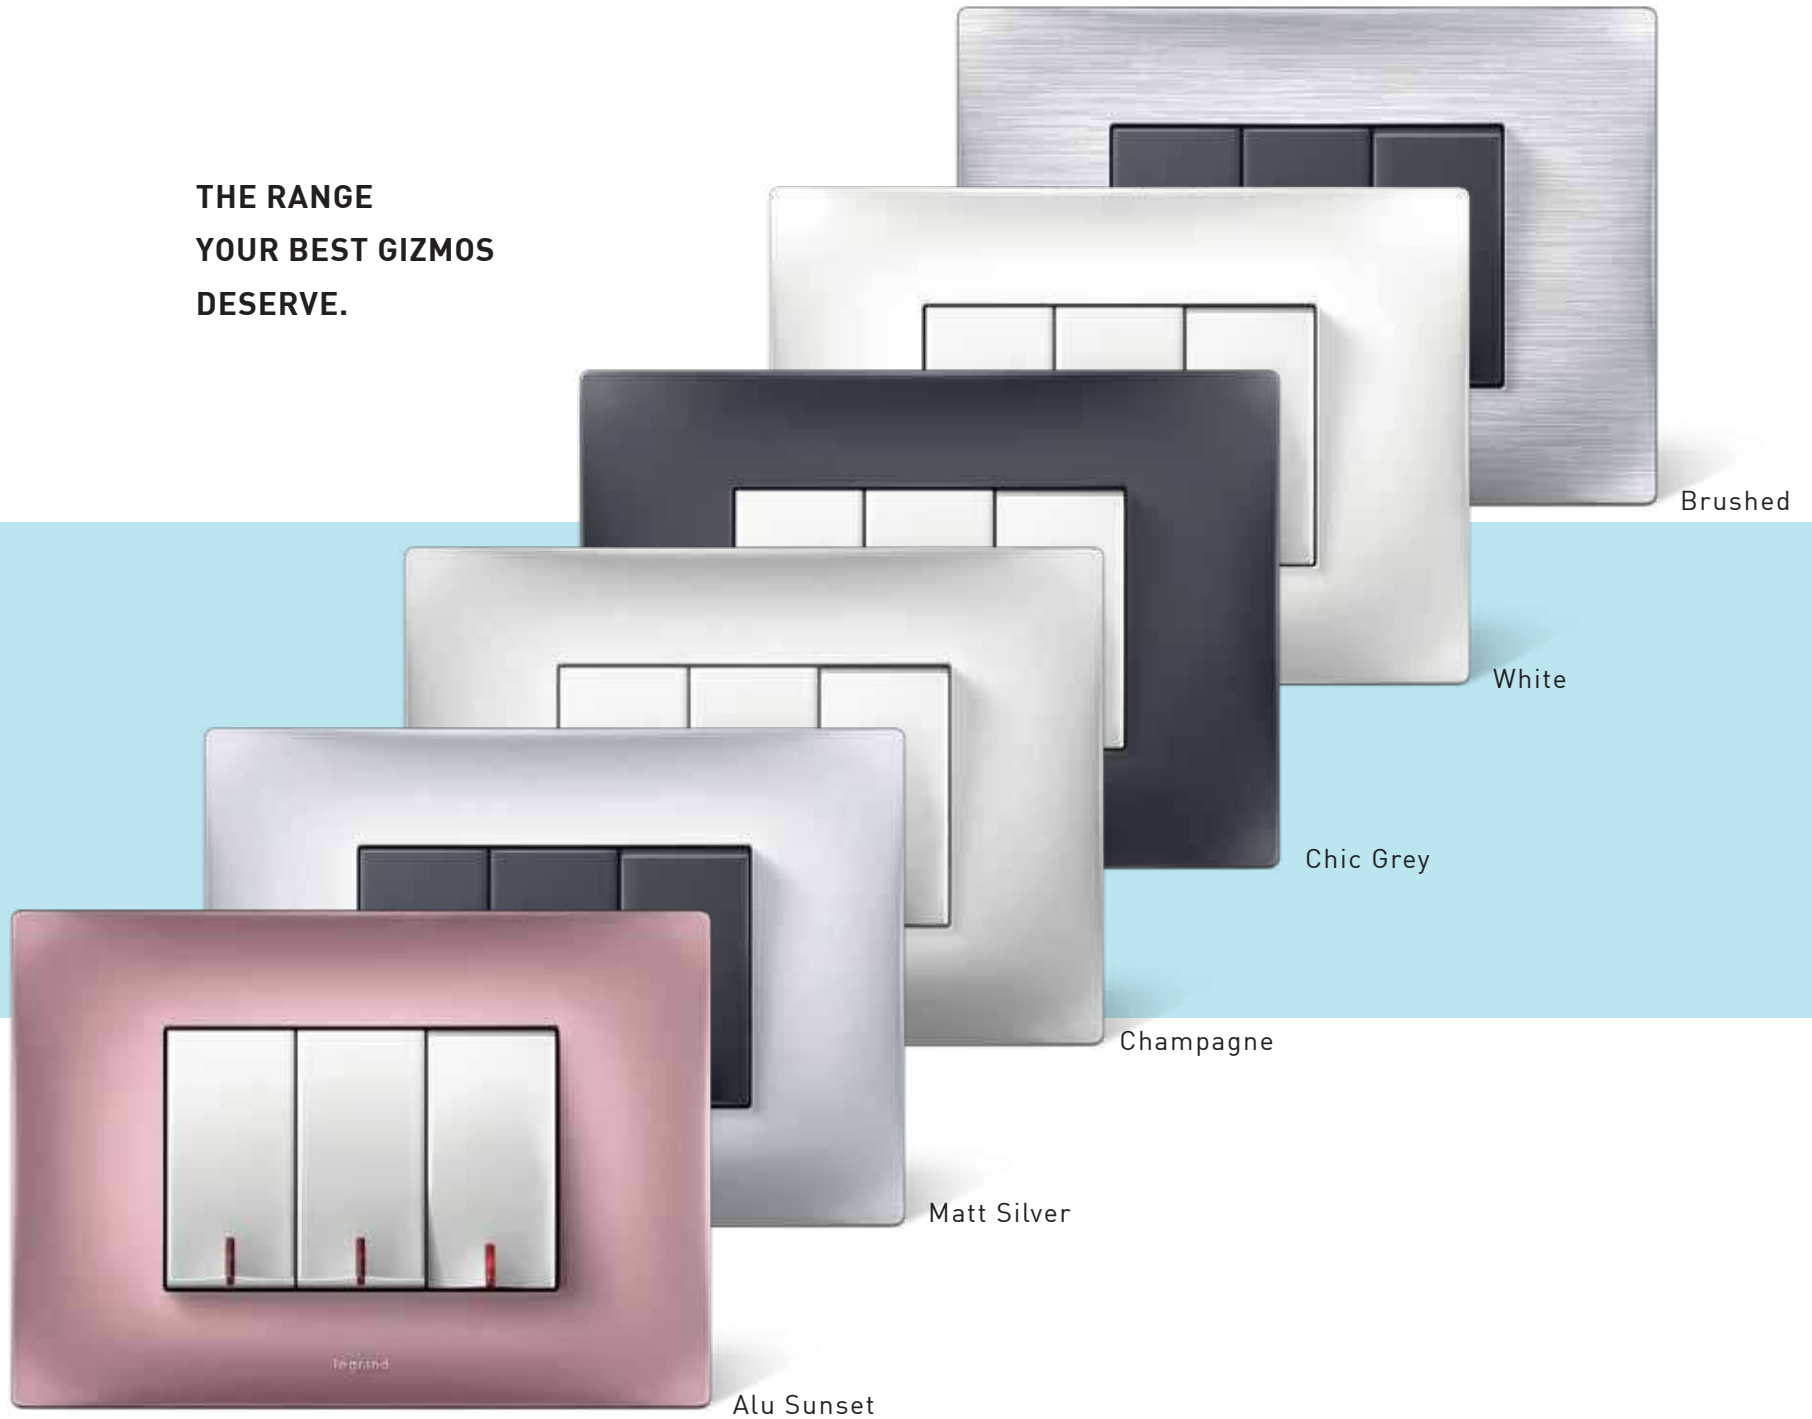

Brushed

White

Chic Grey

Champagne

Matt Silver

Alu Sunset



# COLOUR ME CHIC



Lyncus plates come in 6 trendy shades, perfect for modern homes and tastes.





Switches are ISI marked as per the latest IS 3854:1997  
First time in India- Unique Signature design

| Pack   | Cat.Nos  | Switches 6 A 230 V AC               |
|--------|----------|-------------------------------------|
| 20/200 | 6 772 00 | 6 A Switch 1 W                      |
| 20/200 | 6 772 01 | 6 A Switch 2 W                      |
| 20/200 | 6 772 02 | 6 A Switch 1 W with indicator       |
| 20/200 | 6 772 03 | 6 A Switch 1 W with "Light" marking |
| 20/200 | 6 772 04 | 6 A Switch 1 W with "Fan" marking   |

| Pack   | Cat.Nos  | Switches 10 A 230 V AC         |
|--------|----------|--------------------------------|
| 10/100 | 6 772 05 | 10 A Switch 1 W                |
| 10/100 | 6 772 06 | 10 A Switch 2 W                |
| 10/100 | 6 772 07 | 10 A Intermediate switch       |
| 10/100 | 6 772 08 | 10 A Switch 1 W with indicator |

| Pack   | Cat.Nos  | Switches 16 A 230 V AC         |
|--------|----------|--------------------------------|
| 20/200 | 6 772 09 | 16 A Switch 1 W                |
| 20/200 | 6 772 10 | 16 A Switch 2 W                |
| 20/200 | 6 772 11 | 16 A Switch 1 W with indicator |

No. of modules

1

1

1

1

1

2

2

2

2

1

1

1

| Pack | Cat.Nos | Switches 20 A 230 V AC |
|------|---------|------------------------|
|------|---------|------------------------|

|        |          |                                   |                |
|--------|----------|-----------------------------------|----------------|
| 20/200 | 6 772 12 | 20 A Switch 1 W                   | No. of modules |
| 10/100 | 6 772 13 | 20 A DP Switch 1 W                | 1              |
| 10/100 | 6 772 14 | 20 A DP Switch 1 W with indicator | 2              |
| 10/100 | 6 772 15 | 20 A Switch 2 W                   | 2              |

|        |          |   |                                   |
|--------|----------|---|-----------------------------------|
| 20/200 | 6 772 16 | <b>Switches 25 A 230 V AC</b>   |                                   |
|        |          |  | 25 A SP 1 W switch with indicator |

|        |          |   |
|--------|----------|---|
| 10/100 | 6 772 17 | <b>Switches 32 A 230 V AC</b>   |
|        |          |  32 A DP Switch with indicator |

Our switches are compliant with revised BIS standard (IS 3854:2023) requirements. Also, our switches are covered additionally for use on Self-Ballasted Lamp (SBL) loads.

#### SBL power rating as per IS3854:2023

| Switch Rating    | 6A, 230V~ | 10A, 230V~ | 16A, 230V~ | 20A, 230V~ |
|------------------|-----------|------------|------------|------------|
| SBL power (Watt) | 100 W     | 100 W      | 200 W      | 250 W      |

# Lyncus™

## Push buttons



6 772 20      6 772 21      6 772 22



6 772 23      6 772 24

| Pack   | Cat.Nos  | Push button 6 A 230 V AC |                                   |
|--------|----------|--------------------------|-----------------------------------|
| 20/200 | 6 772 18 |                          | 6 A Push button SP                |
| 20/200 | 6 772 19 |                          | 6 A Push button SP with indicator |
| 20/200 | 6 772 20 |                          | 6 A Bell push                     |
| 20/200 | 6 772 21 |                          | 6 A Bell push with indicator      |
| 10/100 | 6 772 22 |                          | 6 A Bell push                     |
| 10/100 | 6 772 23 |                          | 6 A Bell push with indicator      |

| Pack | Cat.Nos  | Accessories for switches |                            |
|------|----------|--------------------------|----------------------------|
| 5/50 | 6 772 24 |                          | LED indicator for switches |

No. of modules  
1  
1  
1  
1  
2  
2

-

# Lyncus™

## Sockets



6 772 25      6 772 26      6 772 27      6 772 28












6 772 30

| Pack   | Cat.Nos  | Sockets 240 V AC  |  |
|--------|----------|---|--|
|        |          | Conforming to IS 1293 : 1988<br>Shuttered for Child Safety<br>Shutter opens only with phase and neutral insertion simultaneously. |  |
| 20/200 | 6 772 25 |   | 6/16 A 2 Pin Euro US socket  |
| 5/50   | 6 772 26 |   | 16 A 3 Pin Switched socket   |
| 10/100 | 6 772 27 |   | Multistandard socket 6/10/13 A<br>2/3 Pin for 250 V AC 15 A for 127 V type 2 Pin |
| 20/200 | 6 772 28 |   | 6 A 5 Pin universal socket   |
| 5/50   | 6 772 29 |   | 6/16 A socket  |
| 10/100 | 6 772 30 |   | 6/16 A socket  |
| 10/100 | 6 772 31 |   | 6/16 A Euro socket   |

No. of modules  
1  
3  
2  
2  
3  
2  
2



| Pack     | Cat.Nos  | Dimmers and fan regulators   |                                     |                     |
|----------|----------|--|-------------------------------------|---------------------|
|          |          | Fan regulators with ISI mark<br>Fan regulators with ease of speed selection<br>Fan regulator models available to suite all ceiling fans<br>High capacity sturdy design light dimmers |                                     |                     |
| 5/50     | 6 772 36 |   | Rotary light dimmer 400 W           | No. of modules<br>1 |
| 10/100   | 6 772 37 |   | Rotary light dimmer 500 W           | 2                   |
| 5/50     | 6 772 39 |   | Fan step regulator 100 W            | 1                   |
| 10/100   | 6 772 40 |   | Fan step regulator 100 W 360 degree | 2                   |
| 10/100   | 6 772 41 |   | Fan step regulator 120 W 360 degree | 2                   |
| 1/10/100 | 6 772 42 |   | Fan step regulator 70 W             | 2                   |
|          |          | <b>Emergency light</b>   |                                     |                     |
|          |          | Unique portable torch design with battery backup<br>White light for better visibility  |                                     |                     |
| 1/12     | 6 772 43 |   | Removable LED lamp                  | 2                   |
|          |          | <b>Skirting light</b>  |                                     |                     |
|          |          | LED skirting light   |                                     |                     |
| 5/25     | 6 772 48 |   |                                     | 3                   |
|          |          | <b>Indicator</b>   |                                     |                     |
|          |          | Indicator unit 1 module<br>with transparent LED & colored labels   |                                     |                     |
| 10/100   | 6 772 87 |   |                                     | 1                   |



| Pack   | Cat.Nos  | Bell call indicator  |                     |
|--------|----------|--|---------------------|
| 20/200 | 6 772 49 | Bell call indicator 240 V AC   | No. of modules<br>1 |
|        |          | <b>Buzzer</b>  |                     |
| 20/200 | 6 772 50 | Buzzer 230 V AC  | 1                   |
|        |          | <b>Infrared sensors</b>  |                     |
|        |          | High sensitive design with sensitivity and time adjustment<br>Suitable for all type of loads |                     |
| 1/50   | 6 772 51 | Infrared sensor 400 W  | 2                   |
|        |          | <b>Remote unit</b>   |                     |
|        |          | Sleek, high quality, modular 4 switch remote unit<br>Suitable for all type of loads          |                     |
| 1/5/20 | 6 772 52 | Remote control unit for light & fan  | 4                   |
| 1/5/30 | 6 773 03 | Remote control hand unit   | -                   |

# Lyncus™

## Hospitality function



6 772 53 + 6 772 55



6 772 56



6 772 57



6 772 58

| Pack | Cat.Nos  | Hotel Keycard switch  |
|------|----------|---|
| 1/10 | 6 772 53 | 16 A Key card switch<br>Suitable for all type of loads<br>Isolated contacts for switch function |



16 A Key card switch

|        |          |                          |
|--------|----------|--------------------------|
| 10/100 | 6 772 55 | Credit card size key fob |
|--------|----------|--------------------------|



### Hotel "DND and MMR" functions

|        |          |                                       |
|--------|----------|---------------------------------------|
| 10/100 | 6 772 56 | DND & MMR indicator<br>with bell push |
|--------|----------|---------------------------------------|



|        |          |  |
|--------|----------|--|
| 10/100 | 6 772 57 | Internal control unit<br>for DND & MMR |
|--------|----------|--|



### Shaver socket

Compact design for modular installation  
Ease for voltage selection



Shaver socket 115/230 V MonoBlock with plate (For Legrand boxes only)

No. of modules  
2

-

2

2

2

# Lyncus™

## Sockets and connectors



6 772 60



6 772 62



6 772 63



6 772 64



6 772 67



6 772 68



6 772 69

| Pack   | Cat.Nos  | TV sockets        |
|--------|----------|-------------------|
| 20/200 | 6 772 60 | TV coaxial socket |



No. of modules  
1

|        |          |                              |
|--------|----------|------------------------------|
| 20/200 | 6 772 62 | Telephone socket RJ11        |
| 20/200 | 6 772 63 | Telephone socket double RJ11 |
| 20/200 | 6 772 64 | RJ 45 Cat 5 UTP              |
| 20/200 | 6 772 65 | RJ 45 cat 6 UTP              |



1



1



1



1

### Audio video connectors

Used to transmit high-definition digital/analog audio/video streams between a source (Blu-ray player, computer) and a compatible receiver (TV, LCD video projector...)

|      |          |   |
|------|----------|---|
| 1/10 | 6 772 67 | Preterminated audio video connector (RCA) |
|------|----------|---|



1

|      |          |                           |
|------|----------|---------------------------|
| 1/10 | 6 772 68 | Preterminated HDMI socket |
|------|----------|---------------------------|



1

|      |          |                                   |
|------|----------|-----------------------------------|
| 1/10 | 6 772 69 | Preterminated projector connector |
|------|----------|-----------------------------------|



1



6 772 70



6 772 71



6 772 74

**Sound (Volume controller)**

| Pack     | Cat.Nos  |  |
|----------|----------|--|
| 1/10/100 | 6 772 70 | Suitable for 8 Ohms, 3 Watts (RMS) speaker |

**Motor starter**

|          |          |                    |
|----------|----------|--------------------|
| 1/10/100 | 6 772 71 | 16 A Motor starter |
| 1/10/100 | 6 772 72 | 25 A Motor starter |

**VSP**

|        |          |                               |
|--------|----------|-------------------------------|
| 20/200 | 6 772 74 | Voltage surge protector 230 V |
|--------|----------|-------------------------------|

**Modular MCB (IS : 60898:2002)**

Superior design tested as per IS standrad  
Modular size in different true current capacities

|          |          |                     |
|----------|----------|---------------------|
| 1/10/100 | 6 772 81 | 16 A MCB SP C curve |
| 1/10/100 | 6 772 82 | 20 A MCB SP C curve |
| 1/10/100 | 6 772 83 | 32 A MCB SP C curve |



6 772 88



6 772 89



6 772 90



6 772 92



6 772 94



6 772 95


**USB chargers (IS13252 (Part 1) / IEC 60950-1)**

Complete family of USB chargers available  
First time in India - USB C type Charger for fast charging  
With mandatory CRS marking

|          |          |  |  |
|----------|----------|--|--|
| 1/5/50   | 6 772 88 |  | USB Charger 1000 mA Type A                 |
| 1/10/100 | 6 772 89 |  | Double USB charger 3000 mA Type A & Type C |
| 1/5/50   | 6 772 90 |  | USB charger 1500 mA Type C                 |

**Combi (Socket + USB)**

Combi USB tested for optimum operation  
with high output efficiency

|        |          |  |   |
|--------|----------|--|---|
| 1/5/50 | 6 772 92 |  | Combi twin USB 2400 mA multistandard socket Type A          |
| 1/5/50 | 6 772 94 |  | Combi twin USB 2400 mA multistandard socket Type A & Type C |

**Wireless charger\*\***

Efficient charging tested as per international standard  
Modular installation  
Mobile holder present  
Available USB for wire charging

|      |          |  |   |
|------|----------|--|---|
| 1/10 | 6 772 95 |  | Wireless charger + Type-A USB<br>1 A - 5 V charger with one 2.4 A USB Port to power a second device |
|------|----------|--|---|














\*\* Charging only with wireless compatible phone having induction receiver technology



# Lyncus™

## Electronic function (contd.)



| Pack     | Cat.Nos   | Loud speakers   |   | Touch regulator & dimmer |        | Reading light |   | Accessories  |                |
|----------|-----------|---|---|--------------------------|--------|---------------|---|--|----------------|
| 1/6      | 6 772 98  |    | Compact 10W RMS easy hooking intallation<br>86db high sensitivity<br>Ideal for living room, kitchen, Bedroom, offices, canteen<br><br>Loudspeaker for false ceiling & plaster board<br>8 Ohms 10 W rms  | No. of modules           | 1/50   | 6 773 05      |    | Touch fan regulator 100 W                            | No. of modules |
|          |           |   |   | -                        | 1/50   | 6 773 15      |    | 300 W Universal LED touch dimmer with scroll dimming | 2              |
| 1/10/100 | 6 772 99# |    | <b>Sound diffusion</b><br>Bluetooth tested as per international standards<br>Voice messages for easy uderstanding<br>Compact 2 M design with all control functions<br>Inbuilt amplifier, 1.5 WRMS with 8ohms<br>Ideal for living room, kitchen, Bedroom, offices, canteen...<br>Greater than 8 m range<br>Bluetooth sound diffusion | 2                        | 1/12   | 6 773 16      |    | Reading LED light (warm white)                       | 2              |
| 1/10/120 | 6 773 04  |  | <b>Rotary dimmer universal</b><br>First time in India-High quality universal dimmer for all type of light loads including LED loads<br>Comes in 1 module<br>Rotary LED light dimmer 50 W  | 1                        | 20/200 | 6 772 75      |   | Cable outlet 8 mm                                    | 1              |
|          |           |   |   |                          | 20/200 | 6 772 76      |  | Blanking plate                                       | 1              |
|          |           |   |   |                          | 10/100 | 6 772 77      |  | Blanking plate                                       | 2              |
| 1/50     | 6 773 09  |  | <b>Touch switches</b><br>Range of touch switches<br>Tested for > 40000 switching operations at full load<br>Capacitive touch activation with big touch area for ON THE GO switching<br>6 A Touch switch 1 W   | 2                        |        |               |   |  |                |
| 1/50     | 6 773 10  |  | 6 A Touch switch 2 W  | 2                        |        |               |   |  |                |
| 1/50     | 6 773 13  |  | 16 A Touch switch 1 W   | 2                        |        |               |   |  |                |
| 1/50     | 6 773 06  |  | 6 A Touch bell push   | 2                        |        |               |   |  |                |

# To be introduced shortly



Switches are ISI marked as per the latest IS 3854:1997  
First time in India- Unique Signature design

| Pack   | Cat.Nos  | Switches 6 A 230 V AC |                                     |
|--------|----------|-----------------------|-------------------------------------|
| 20/200 | 6 774 00 |                       | 6 A Switch 1 W                      |
| 20/200 | 6 774 01 |                       | 6 A Switch 2 W                      |
| 20/200 | 6 774 02 |                       | 6 A Switch 1 W with indicator       |
| 20/200 | 6 774 03 |                       | 6 A Switch 1 W with "Light" marking |
| 20/200 | 6 774 04 |                       | 6 A Switch 1 W with "Fan" marking   |

| Pack   | Cat.Nos  | Switches 10 A 230 V AC |                               |
|--------|----------|------------------------|-------------------------------|
| 10/100 | 6 774 05 |                        | 10 A Switch 1 W               |
| 10/100 | 6 774 06 |                        | 10 A Switch 2 W               |
| 10/100 | 6 774 07 |                        | 10 A Intermediate switch      |
| 10/100 | 6 774 08 |                        | 10 A Switch 1W With indicator |

| Pack   | Cat.Nos  | Switches 16 A 230 V AC |                                |
|--------|----------|------------------------|--------------------------------|
| 20/200 | 6 774 09 |                        | 16 A Switch 1 W                |
| 20/200 | 6 774 10 |                        | 16 A Switch 2 W                |
| 20/200 | 6 774 11 |                        | 16 A Switch 1 W with indicator |

No. of modules

1

1

1

1

1

2

2

2

2

### Switches 20 A 230 V AC

|        |          |  |                                   |
|--------|----------|--|-----------------------------------|
| 20/200 | 6 774 12 |  | 20 A Switch 1 W                   |
| 10/100 | 6 774 13 |  | 20 A DP Switch 1 W                |
| 10/100 | 6 774 14 |  | 20 A DP Switch 1 W with indicator |
| 10/100 | 6 774 15 |  | 20 A Switch 2 W                   |

### Switches 25 A 230 V AC

|        |          |  |                                   |
|--------|----------|--|-----------------------------------|
| 20/200 | 6 774 16 |  | 25 A SP 1 W switch with indicator |
|--------|----------|--|-----------------------------------|

### Switches 32 A 230 V AC

|        |          |  |                               |
|--------|----------|--|-------------------------------|
| 10/100 | 6 774 17 |  | 32 A DP switch with indicator |
|--------|----------|--|-------------------------------|

No. of modules

1

2

2

2

1

2

# Lyncus™

## Push buttons



6 774 18    6 774 19    6 774 20    6 774 21    6 774 22    6 774 23

| Pack   | Cat.Nos  | Push button 6 A 230 V AC |                                   |
|--------|----------|--------------------------|-----------------------------------|
| 20/200 | 6 774 18 |                          | 6 A Push button SP                |
| 20/200 | 6 774 19 |                          | 6 A Push button SP with indicator |
| 20/200 | 6 774 20 |                          | 6 A Bell push                     |
| 20/200 | 6 774 21 |                          | 6 A Bell push with indicator      |
| 10/100 | 6 774 22 |                          | 6 A Bell push                     |
| 10/100 | 6 774 23 |                          | 6 A Bell push with indicator      |

| No. of modules |
|----------------|
| 1              |
| 1              |
| 1              |
| 1              |
| 2              |
| 2              |

# Lyncus™

## Sockets



6 774 27    6 774 28    6 774 29    6 774 31

| Pack   | Cat.Nos  | Sockets 240 V AC  |   |
|--------|----------|---|---|
|        |          | Conforming to IS 1293 : 1988<br>Shuttered for Child Safety<br>Shutter opens only with phase and neutral insertion simultaneously. |   |
| 20/200 | 6 774 25 |   | 6/16 A 2 Pin Euro US socket   |
| 10/100 | 6 774 27 |   | Multistandard socket 6/10/13 A<br>2/3 Pin for 250 V AC 15A for 127 V Type 2 Pin |
| 20/200 | 6 774 28 |   | 6 A 5 Pin universal socket  |
| 5/50   | 6 774 29 |   | 6/16 A Socket   |
| 10/100 | 6 774 30 |   | 6/16 A Socket   |
| 10/100 | 6 774 31 |   | 6/16 A Euro socket  |

| No. of modules |
|----------------|
| 1              |
| 2              |
| 2              |
| 3              |
| 2              |
| 2              |



6 774 37

6 774 39

| Pack     | Cat.Nos  | Dimmers and fan regulators   |                                     |
|----------|----------|--|-------------------------------------|
|          |          | Fan regulators with ISI mark<br>Fan regulators with ease of speed selection<br>Fan regulator models available to suite all ceiling fans<br>High capacity sturdy design light dimmers |                                     |
| 5/50     | 6 774 36 |  | Rotary light dimmer 400 W           |
| 10/100   | 6 774 37 |  | Rotary light dimmer 500 W           |
| 5/50     | 6 774 39 |  | Fan step regulator 100 W            |
| 10/100   | 6 774 40 |  | Fan step regulator 100 W 360 degree |
| 10/100   | 6 774 41 |  | Fan step regulator 120 W 360 degree |
| 1/10/100 | 6 774 42 |  | Fan step regulator 70 W             |

No. of modules

1

2

1

2

2

2








6 774 49

6 774 50

6 774 52

6 773 03

| Pack   | Cat.Nos  | Skirting light  |                                     | No. of modules |
|--------|----------|---|-------------------------------------|----------------|
| 5/25   | 6 774 48 |    | LED Skirting light                  | 3              |
|        |          |   |                                     |                |
| 20/200 | 6 774 49 |    | Bell call indicator 240 V AC        | 1              |
|        |          |   |                                     |                |
| 20/200 | 6 774 50 |    | Buzzer 230 V AC                     | 1              |
|        |          |   |                                     |                |
|        |          | <b>Remote unit</b>  |                                     |                |
|        |          | Sleek, high quality, modular 4 switch remote unit<br>Suitable for all type of loads   |                                     |                |
| 1/5/20 | 6 774 52 |  | Remote control unit for light & fan | 4              |
| 1/5/30 | 6 773 03 |  | Remote control hand unit            | -              |

Lyncus™

## Hospitality functions



| Pack   | Cat.Nos  | Hotel keycard switch  |
|--------|----------|---|
| 1/10   | 6 774 53 | 16 A Key card switch<br>Suitable for all type of loads<br>Isolated contacts for switch function |
| 10/100 | 6 772 55 | Credit card size Key fob  |
| 10/100 | 6 774 56 | Hotel "DND and MMR" functions   |
| 10/100 | 6 774 57 | DND & MMR indicator with bell push<br>Internal control unit for DND & MMR                       |
| 1/16   | 6 774 58 | Shaver socket<br>Compact design for modular installation<br>Ease for voltage selection          |

No. of modules  
2

-

2

2

2

Lyncus™

## Sockets and connectors



| Pack     | Cat.Nos  | TV sockets   | No. of modules |
|----------|----------|--|----------------|
| 20/200   | 6 774 60 | TV coaxial socket  | 1              |
| 20/200   | 6 774 62 | Data & voice<br>Telephone socket RJ11  | 1              |
| 20/200   | 6 774 63 | Telephone socket double RJ11   | 1              |
| 20/200   | 6 774 64 | RJ45 Cat 5 UTP   | 1              |
| 20/200   | 6 774 65 | RJ45 Cat 6 UTP   | 1              |
| 1/10     | 6 774 67 | Audio Video connectors<br>Used to transmit high-definition digital/analog audio/video streams between a source (Blu-ray player, computer) and a compatible receiver (TV, LCD video projector...) | 1              |
| 1/10     | 6 774 68 | Preterminated audio video connector  | 1              |
| 1/10     | 6 774 69 | Preterminated HDMI socket  | 1              |
| 1/10     | 6 774 69 | Preterminated projector connector  | 1              |
| 1/10/100 | 6 774 70 | Sound (Volume controller)<br>Suitable for 8 Ohms, 3 watts (RMS) speaker  | 2              |



6 774 88      6 774 89      6 774 90

| Pack     | Cat.Nos  | <b>USB chargers (IS13252 (Part 1) / IEC-60950-1)</b>  |   |
|----------|----------|---|---|
|          |          | Complete family of USB chargers available<br>First time in India - USB C type Charger for fast charging<br>With mandatory CRS marking |   |
| 1/5/50   | 6 774 88 |   | USB Charger 1000 mA Type A                                  |
| 1/10/100 | 6 774 89 |   | Double USB Charger 3000 mA Type A & Type C                  |
| 1/5/50   | 6 774 90 |   | USB Charger 1500 mA Type C                                  |
|          |          | <b>Combi (Socket + USB)</b>   |   |
|          |          | Combi USB tested for optimum operation<br>with high output efficiency   |   |
| 1/5/50   | 6 774 92 |   | Combi twin USB 2400 mA multistandard socket Type A          |
| 1/5/50   | 6 774 94 |   | Combi twin USB 2400 mA multistandard socket Type A & Type C |

No. of modules

1

2

1

3

3



6 774 24      6 774 75      6 774 76

| Pack     | Cat.Nos   | <b>Sound diffusion</b>  |                           |
|----------|-----------|---|---------------------------|
|          |           | Bluetooth tested as per international standards<br>Voice messages for easy understanding<br>Compact 2M design with all control functions<br>Inbuilt amplifier, 1.5 WRMS with 8ohms<br>Ideal for living room, kitchen, Bedroom, offices, canteen...<br>Greater than 8m range |                           |
| 1/10/100 | 6 774 99* |   | Bluetooth sound diffusion |
|          |           | <b>Rotary dimmer universal</b>  |                           |
|          |           | First time in India-High quality universal dimmer<br>for all type of light loads including LED loads<br>Comes in 1 module   |                           |
| 1/10/120 | 6 774 24  |   | Rotary LED dimmer 50 W    |
|          |           | <b>Accessories</b>  |                           |
| 20/200   | 6 774 75  |   | Cable outlet 8 mm         |
| 20/200   | 6 774 76  |   | Blanking plate            |

No. of modules

2

1

1

1

# To be introduced shortly

Lyncus™

Plate with frame



6 775 02



6 775 04



6 775 06



6 775 08



6 775 22



6 775 24



6 775 26



6 775 28

| Pack   | Cat.Nos  | Plate frame white              | No. of modules | Dimension (mm) |
|--------|----------|--------------------------------|----------------|----------------|
| 20/200 | 6 775 01 | Classic white plate + frame    | 1              | 86 x 86        |
| 20/200 | 6 775 02 | Classic white plate + frame    | 2              | 86 x 86        |
| 10/100 | 6 775 03 | Classic white Plate + Frame    | 3              | 86 x 121       |
| 10/100 | 6 775 04 | Classic white Plate + Frame    | 4              | 86 x 146       |
| 5/50   | 6 775 06 | Classic white Plate + Frame    | 6              | 86 x 224       |
| 5/50   | 6 775 08 | Classic white Plate + Frame(H) | 8              | 86 x 245       |
| 5/25   | 6 775 09 | Classic white Plate + Frame    | 2x4            | 172 x 146      |
| 10     | 6 775 12 | Classic white Plate + Frame    | 12             | 172 x 224      |
| 10     | 6 775 16 | Classic white Plate + Frame    | 16             | 172 x 224      |
| 10     | 6 775 18 | Classic white Plate + Frame    | 18             | 240 x 224      |

| Pack   | Cat.Nos  | Plate frame chic grey       | No. of modules | Dimension (mm) |
|--------|----------|-----------------------------|----------------|----------------|
| 20/200 | 6 775 21 | Chic grey plate + Frame     | 1              | 86 x 86        |
| 20/200 | 6 775 22 | Chic grey plate + Frame     | 2              | 86 x 86        |
| 10/100 | 6 775 23 | Chic grey plate + Frame     | 3              | 86 x 121       |
| 10/100 | 6 775 24 | Chic grey plate + Frame     | 4              | 86 x 146       |
| 5/50   | 6 775 26 | Chic grey plate + Frame     | 6              | 86 x 224       |
| 5/50   | 6 775 28 | Chic grey plate + Frame (H) | 8              | 86 x 245       |
| 5/25   | 6 775 29 | Chic grey plate + Frame     | 2x4            | 172 x 146      |
| 10     | 6 775 32 | Chic grey plate + Frame     | 12             | 172 x 224      |
| 10     | 6 775 36 | Chic grey plate + Frame     | 16             | 172 x 224      |
| 10     | 6 775 38 | Chic grey plate + Frame     | 18             | 240 x 224      |



6 775 42



6 775 44



6 775 46



6 775 48



6 775 62













6 775 64













6 775 66



6 775 68

| Pack   | Cat.Nos  | Plate frame brushed  | No. of modules | Dimension (mm) |
|--------|----------|--|----------------|----------------|
| 20/200 | 6 775 41 |  Brushed silver plate + Frame       | 1              | 86 x 86        |
| 20/200 | 6 775 42 |  Brushed silver plate + Frame       | 2              | 86 x 86        |
| 10/100 | 6 775 43 |  Brushed silver plate + Frame       | 3              | 86 x 121       |
| 10/100 | 6 775 44 |  Brushed silver plate + Frame       | 4              | 86 x 146       |
| 5/50   | 6 775 46 |  Brushed silver plate + Frame      | 6              | 86 x 224       |
| 5/50   | 6 775 48 |  Brushed silver plate + Frame (H) | 8              | 86 x 245       |
| 5/25   | 6 775 49 |  Brushed silver plate + Frame     | 2x4            | 172 x 146      |
| 10     | 6 775 52 |  Brushed silver plate + Frame     | 12             | 172 x 224      |
| 10     | 6 775 56 |  Brushed silver plate + Frame     | 16             | 172 x 224      |
| 10     | 6 775 58 |  Brushed silver plate + Frame     | 18             | 240 x 224      |

| Pack   | Cat.Nos  | Plate frame Alu sun set   | No. of modules | Dimension (mm) |
|--------|----------|---|----------------|----------------|
| 20/200 | 6 775 61 |  Alu sun set plate + Frame   | 1              | 86 x 86        |
| 20/200 | 6 775 62 |  Alu sun set plate + Frame   | 2              | 86 x 86        |
| 10/100 | 6 775 63 |  Alu sun set plate + Frame   | 3              | 86 x 121       |
| 10/100 | 6 775 64 |  Alu sun set plate + Frame   | 4              | 86 x 146       |
| 5/50   | 6 775 66 |  Alu sun set plate + Frame  | 6              | 86 x 224       |
| 5/50   | 6 775 68 |  Alu sun set plate + Frame | 8              | 86 x 245       |
| 5/25   | 6 775 69 |  Alu sun set plate + Frame | 2x4            | 172 x 146      |
| 10     | 6 775 72 |  Alu sun set plate + Frame | 12             | 172 x 224      |
| 10     | 6 775 76 |  Alu sun set plate + Frame | 16             | 172 x 224      |
| 10     | 6 775 78 |  Alu sun set plate + Frame | 18             | 240 x 224      |



Lyncus™

Plate with frame



6 775 82



6 775 84



6 775 86



6 775 88



6 776 02



6 776 04



6 776 06



6 776 08

| Pack   | Cat.Nos  | Plate frame champagne |                             |  | No. of modules | Dimension (mm) |
|--------|----------|-----------------------|-----------------------------|--|----------------|----------------|
| 20/200 | 6 775 81 |                       | Champagne plate + Frame     |  | 1              | 86 x 86        |
| 20/200 | 6 775 82 |                       | Champagne plate + Frame     |  | 2              | 86 x 86        |
| 10/100 | 6 775 83 |                       | Champagne plate + Frame     |  | 3              | 86 x 121       |
| 10/100 | 6 775 84 |                       | Champagne plate + Frame     |  | 4              | 86 x 146       |
| 5/50   | 6 775 86 |                       | Champagne plate + Frame     |  | 6              | 86 x 224       |
| 5/50   | 6 775 88 |                       | Champagne plate + Frame (H) |  | 8              | 86 x 245       |
| 5/25   | 6 775 89 |                       | Champagne plate + Frame     |  | 2x4            | 172 x 146      |
| 10     | 6 775 92 |                       | Champagne plate + Frame     |  | 12             | 172 x 224      |
| 10     | 6 775 96 |                       | Champagne plate + Frame     |  | 16             | 172 x 224      |
| 10     | 6 775 98 |                       | Champagne plate + Frame     |  | 18             | 240 x 224      |

| Pack   | Cat.Nos  | Plate frame matt silver |                               |  | No. of modules | Dimension (mm) |
|--------|----------|-------------------------|-------------------------------|--|----------------|----------------|
| 20/200 | 6 776 01 |                         | Matt silver plate + Frame     |  | 1              | 86 x 86        |
| 20/200 | 6 776 02 |                         | Matt silver plate + Frame     |  | 2              | 86 x 86        |
| 10/100 | 6 776 03 |                         | Matt silver plate + Frame     |  | 3              | 86 x 121       |
| 10/100 | 6 776 04 |                         | Matt silver plate + Frame     |  | 4              | 86 x 146       |
| 5/50   | 6 776 06 |                         | Matt silver plate + Frame     |  | 6              | 86 x 224       |
| 5/50   | 6 776 08 |                         | Matt silver plate + Frame (H) |  | 8              | 86 x 245       |
| 5/25   | 6 776 09 |                         | Matt silver plate + Frame     |  | 2x4            | 172 x 146      |
| 10     | 6 776 12 |                         | Matt silver plate + Frame     |  | 12             | 172 x 224      |
| 10     | 6 776 16 |                         | Matt silver plate + Frame     |  | 16             | 172 x 224      |
| 10     | 6 776 18 |                         | Matt silver plate + Frame     |  | 18             | 240 x 224      |











6 890 07

6 890 08

6 890 09

6 890 10

| Pack | Cat.Nos  | <b>Metal flush boxes</b>   |  |
|------|----------|--|--|
| 40   | 6 890 07 |  Flush box - 1/2 module               |  |
| 40   | 6 890 08 |  Flush box - 3 module                 |  |
| 40   | 6 890 09 |  Flush box - 4 module                 |  |
| 40   | 6 890 10 |  Flush box - 6 module                 |  |
| 40   | 6 890 42 |  Flush box - 8 module                 |  |
| 20   | 6 890 31 |  Flush box - 8 module (2 row x 4)     |  |
| 10   | 6 890 11 |  Flush box - 12/16 (2 row x 6) module |  |
| 10   | 6 890 12 |  Flush box - 18 module               |  |

No. of modules

1/2

3

4

6

8

8






12/16

18



6 733 03

6 733 04

| Pack  | Cat.Nos  | <b>Plastic surface boxes</b>   |  |
|-------|----------|--|--|
| 10/50 | 6 733 02 |  Surface box - 1/2 module |  |
| 5/35  | 6 733 03 |  Surface box - 3 module   |  |
| 5/25  | 6 733 04 |  Surface box - 4 module   |  |
| 1/10  | 6 733 06 |  Surface box - 6 module   |  |
| 1/5   | 6 733 08 |  Surface box - 8 module   |  |
| 1/5   | 6 733 05 | Surface box - 8 (2 row x 4) module   |  |

No. of modules

1/2

3



4

6

8

8

**Metal surface boxes**

|     |          |  |       |
|-----|----------|--|-------|
| 1/6 | 6 890 21 |  Surface box - 12/16 (2 row x 6) module | 12/16 |
| 1/4 | 6 890 22 |  surface box - 18 module               | 18    |

**Lyncus™**


**infrared sensor switch 400 W**

### Technical data

#### Infrared sensor switch



Cat.No 6 772 51

#### Characteristics





|              |                |              |                            |                     |
|--------------|----------------|--------------|----------------------------|---------------------|
|              |                |              | 100 - 240 V~<br>50 / 60 Hz |                     |
| -5 °C/+45 °C | -10 °C/+70 °C  | 40 mm        |                            | 1~4 mm <sup>2</sup> |
|              |                |              |                            |                     |
| PIR          | day/dusk/night | 30S/90S/180S | 40 m <sup>2</sup>          |                     |

|        | ①     | ②      | ③      | ④      | ⑤      | ⑥      | ⑦      |
|--------|-------|--------|--------|--------|--------|--------|--------|
|        |       |        |        |        |        |        |        |
| 230 V~ | 400 W | 200 VA | 200 VA | 200 VA | 200 VA | 100 VA | 100 VA |
| 110 V~ | 200 W | 100 VA | 100 VA | 100 VA | 100 VA | 50 VA  | 50 VA  |
|        | 1.7 A | 0.85 A | 0.85 A | 0.85 A | 0.85 A | 0.42 A | 0.42 A |

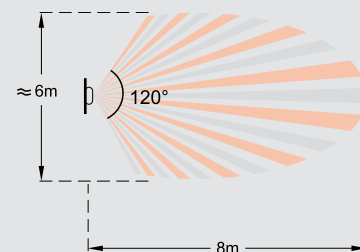
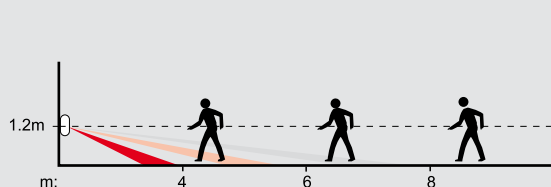


Test temperature is 25 °C


The detect range will be smaller when temperature is higher than 25 °C

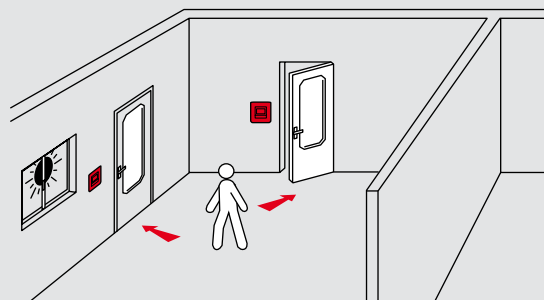


### Wiring

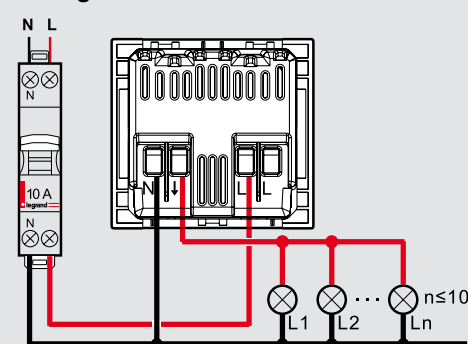

### Working

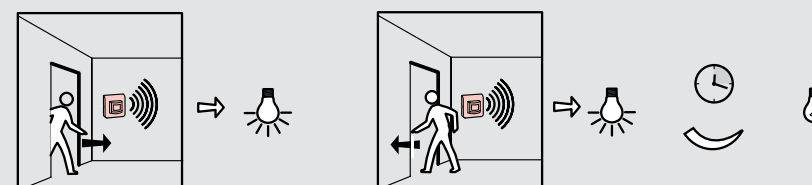

### Fixing

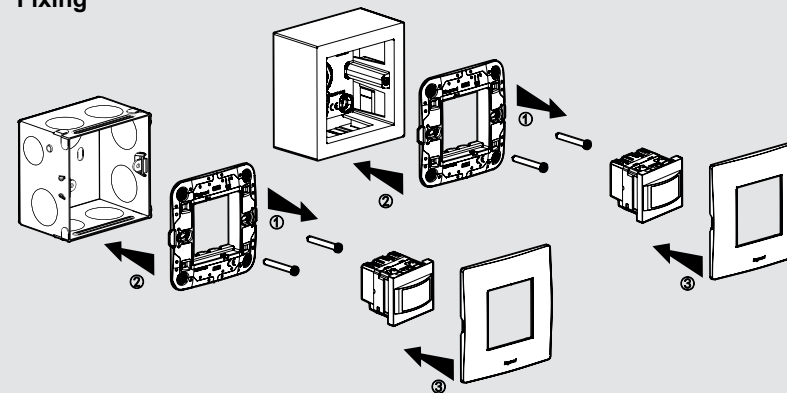

#### ⚠ Safety instructions




This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.

### Technical data

#### Shaver socket

Cat.Nos 6 772 58 / 6 774 58

### Characteristics



### Application

This product will be used in hotel, it can provide safe power for electric shavers. The standby power is 0W, no plug in no output power (please take care, this output to be used for electric shavers only.)

### Technical partmeter

Input: 230 V~50/60 Hz

Output: 230 V~50/60 Hz or 115 V~50/60 Hz


### Operation

Slide switch configuration


1. Switch set to 115 V~, output is 115 VAC.
2. Switch set to 230 V~, output is 230 VAC.

### Caution


1. Do not use for other application, except shaver.
2. Before plug in the shaver socket, please confirm the voltage of your product, set the right voltage 115 V or 230 V.



### Wiring

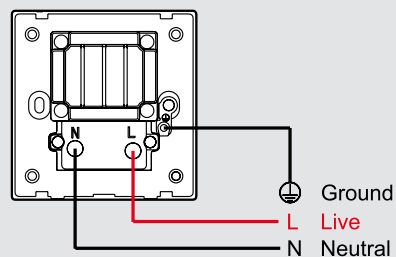

### Fixing

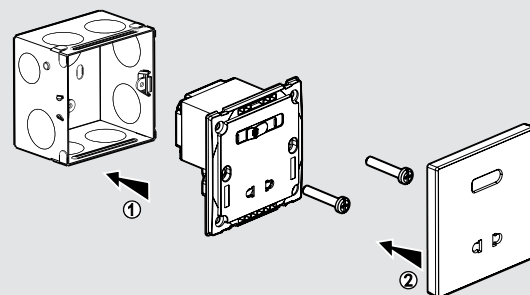


### Safety instructions

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.




### Technical data

#### Wireless charger


Cat.No 6 772 95



WPC Qi - EN 62479 - ICNIRP



Wireless charging only with compatible mobile phonesharing induction receiver technology

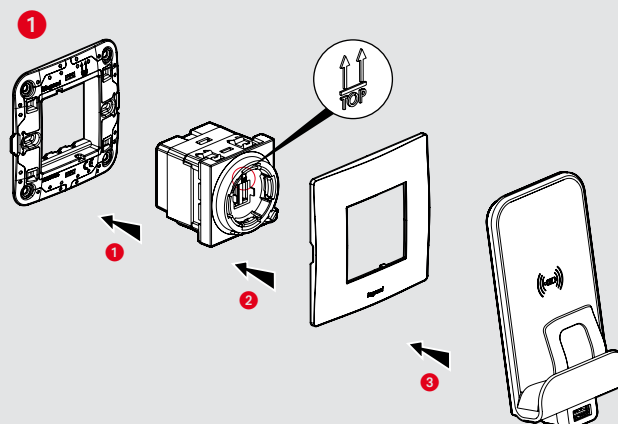


Lyncus™

wireless charger (contd.)

### Technical data

#### Wireless charger (contd.)

Cat.No 6 772 95

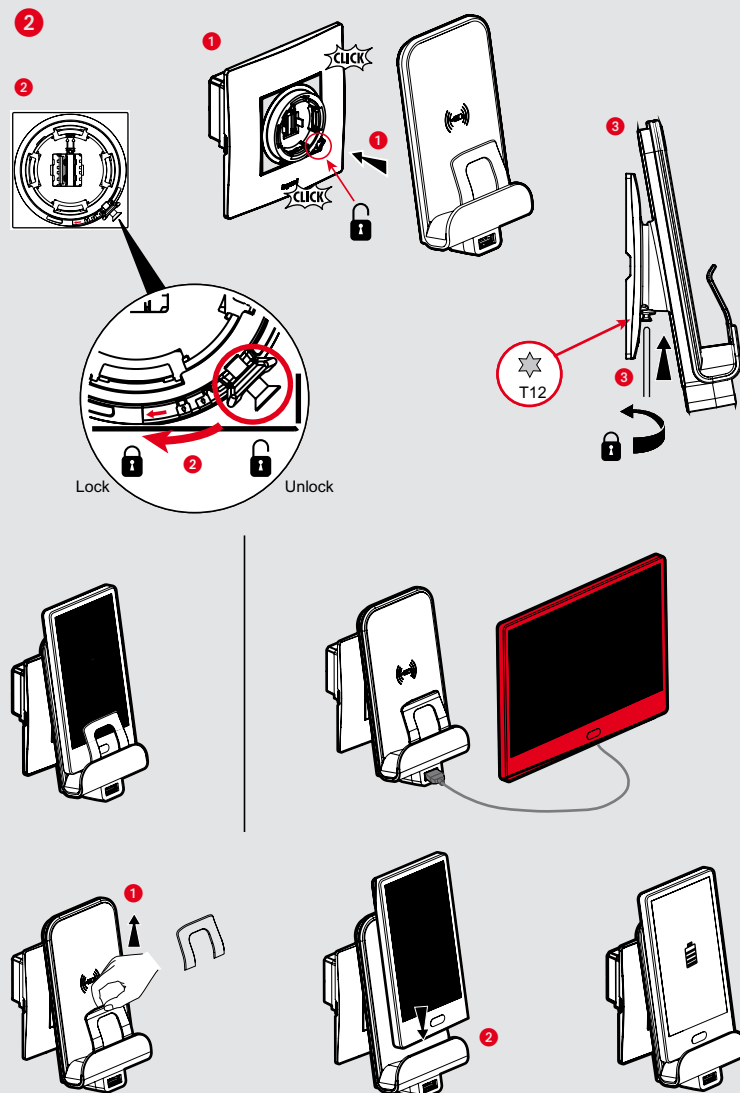


Lyncus™

Bluetooth Sound Receiver

### Technical data

#### Bluetooth Sound Receiver

Cat.Nos 6 772 99 / 6 774 99




### Utilization


|              |  |             |                  |                 |   |
|--------------|--|-------------|------------------|-----------------|---|
|              |  |             | Bluetooth (A2DP) |                 | Works with Bluetooth technology devices |
| 100-240 V AC | STEREO<br>2X1.5 W                      | 4 mA Max AC | > 8 m            | 40°<br>0°       |   |
|              | 1 WX2/16 Ω<br>1.5 WX2/8 Ω<br>2 WX2/4 Ω |             |                  | +5 °C<br>+45 °C |   |

Bluetooth device Name - "legrand"

### Wiring

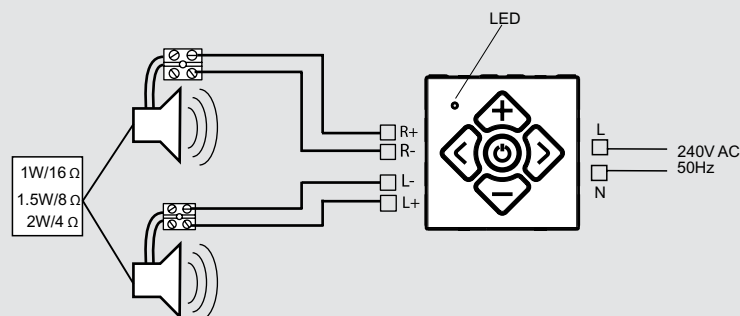


### Function

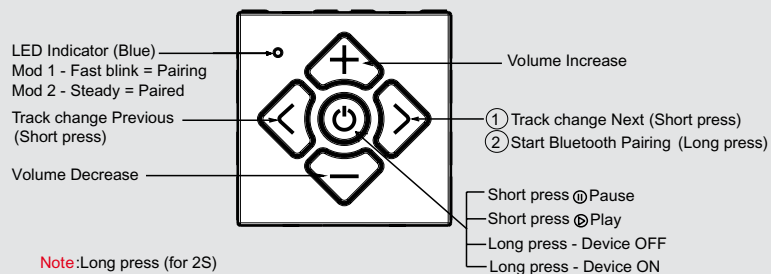


## Technical data

### Bluetooth Connection

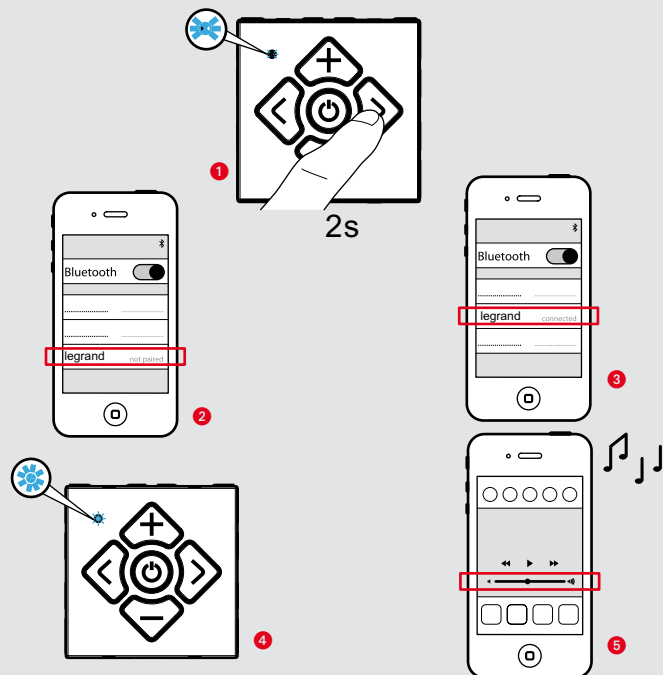

## Mounting

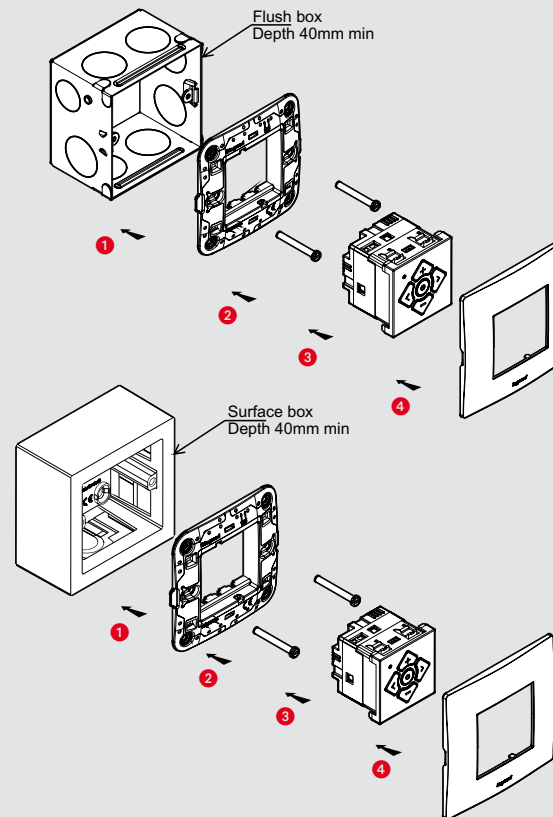

### Safety instructions

GB 1E

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location.

Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees.

Use only Legrand brand accessories.

Lyncus™

rotary LED dimmer

### Technical data


#### Rotary LED dimmer 1 M 50 W

Cat.Nos 6 773 04 / 6 774 24


### Characteristics

|       |      |       |       |        |        |        |        |                            |                      |  |  |
|-------|------|-------|-------|--------|--------|--------|--------|----------------------------|----------------------|--|--|
|       |      |       |       |        |        |        |        | 100 - 240 V~<br>50 / 60 Hz |                      |  |  |
|       |      |       |       |        |        |        |        |                            |                      |  |  |
|       |      |       |       |        |        |        |        |                            |                      |  |  |
|       |      |       |       |        |        |        |        |                            |                      |  |  |
| 240 V | Max. | 200 W | 200 W | 200 VA | 200 VA | 200 VA | 200 VA | 50 W or 8 lamps max.       | 50 W or 8 lamps max. |  |  |
|       | Min. | 3 W   | 3 W   | 3 VA   | 3 VA   | 3 VA   | 3 VA   | 3 W                        | 3 W                  |  |  |
| 100 V | Max. | 100 W | 100 W | 100 VA | 100 VA | 100 VA | 100 VA | 37 W or 8 lamps max.       | 37 W or 8 lamps max. |  |  |
|       | Min. | 3 W   | 3 W   | 3 VA   | 3 VA   | 3 VA   | 3 VA   | 3 W                        | 3 W                  |  |  |


### Operation



### Wiring



### Fixing

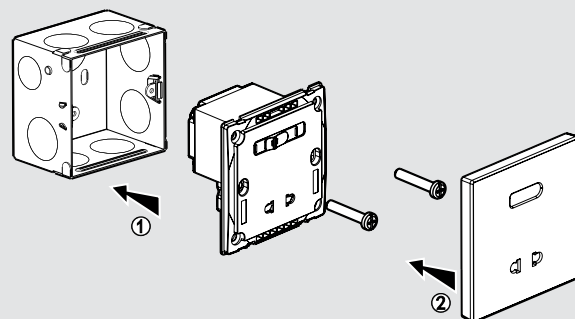

### Safety instructions

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.

Lyncus™








touch fan regulator

### Technical data

#### Touch fan regulator 2 modules 100 W

Cat.No 6 773 05

### Characteristics

|   |   |   |   |                 |   |                       |   |   |
|---|---|---|---|-----------------|---|-----------------------|---|---|
|  |  |  |  | 240 V~<br>50 HZ |  | 1...4 mm <sup>2</sup> |  |  |
|   | -5 °C/+45 °C  | -10 °C/+70 °C   | ≤ 40 mm   |                 |   |                       |   |   |

### Technical data

#### 6 A touch switch bell push

Cat.No 6 773 06


### Characteristics

|  |              |               |         |                            |           |
|--|--------------|---------------|---------|----------------------------|-----------|
|  |              |               |         | 100 - 240 V~<br>50 / 60 Hz |           |
|  | -5 °C/+45 °C | -10 °C/+70 °C | ≤ 40 mm |                            | 1...4 mm² |


|        | ①     | ②     | ③     |
|--------|-------|-------|-------|
| 240 V~ | 200 W | 200 W | 200 W |
| 100 V~ | 100 W | 100 W | 100 W |

- ① Electronic triggered with tunes
- ② Electric magnetic tong bell (ding dong)
- ③ Electric Buzzer-Vibrating


### Operation

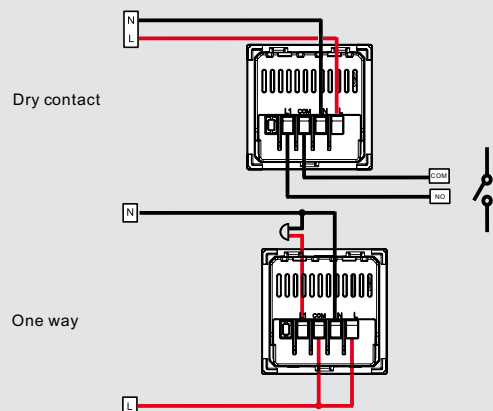

### Operation



### Wiring

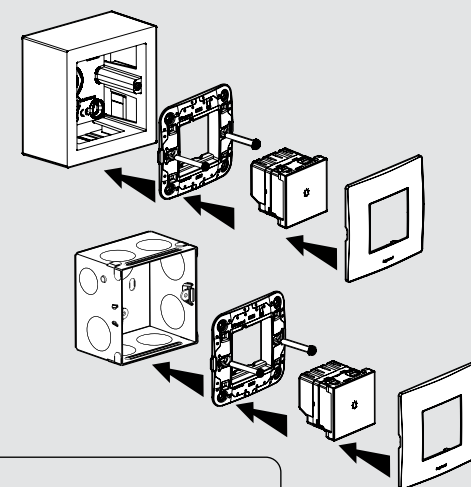

### Safety instructions

When use this product, please install a fuse or protective device to protect the product in the line of COM input, the protective device should be equal to 6 A / 100~240 V.

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.


### Technical data

#### 6 A touch switch 1 - way - 2 modules


Cat.No 6 773 09

### Characteristics


|  |                |                 |         |                            |           |
|--|----------------|-----------------|---------|----------------------------|-----------|
|  |                |                 |         | 100 - 240 V~<br>50 / 60 Hz |           |
|  | -5 °C...+45 °C | -10 °C...+70 °C | ≤ 40 mm |                            | 1...4 mm² |

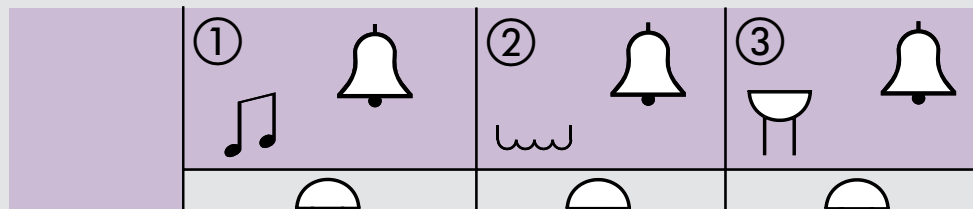


### Operation



### Wiring

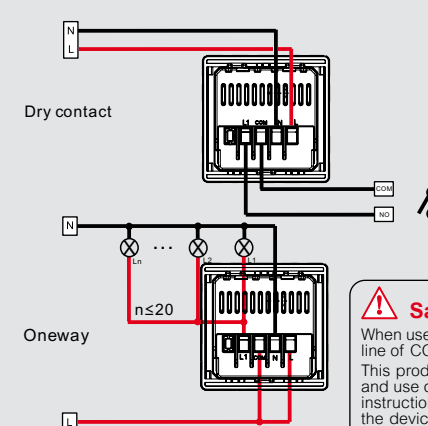

### Fixing

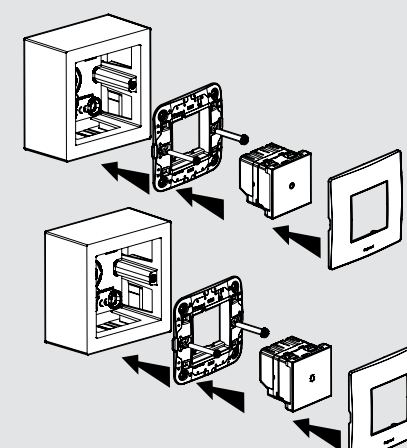

### Safety instructions

When use this product, please install a fuse or protective device to protect the product in the line of COM input, the protective device should be equal to 6 A / 100~240 V.

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.



Lyncus™

























## 6 A touch switch 2 - way

### Technical data


#### 6 A touch switch 2 - way - 2 modules

Cat.No 6 773 10


### Characteristics

|  |   |  |  |  |   |   |  |
|--|---|--|--|--|---|---|--|
|  | <br>-5 °C/+45 °C   | <br>-10 °C/+70 °C   | <br>≤ 40 mm   | 100 - 240 V~<br>50 / 60 Hz   | <br>1...4 mm² |   |  |
|  | ① <br><br> | ② <br> | ③ <br> | ④ <br> | ⑤              | ⑥  | ⑦  |
|  |    |   |   |   |                |    |    |
| 240 V ~  | 1000 W  | 700 VA   | 700 VA   | 250 W  | 250 W   | 250 W   | 4 A(FP=0.6)  |
| 100 V ~  | 400 W   | 300 VA   | 300 VA   | 100 W  | 100 W   | 100 W   |  |


### Operation



### Wiring

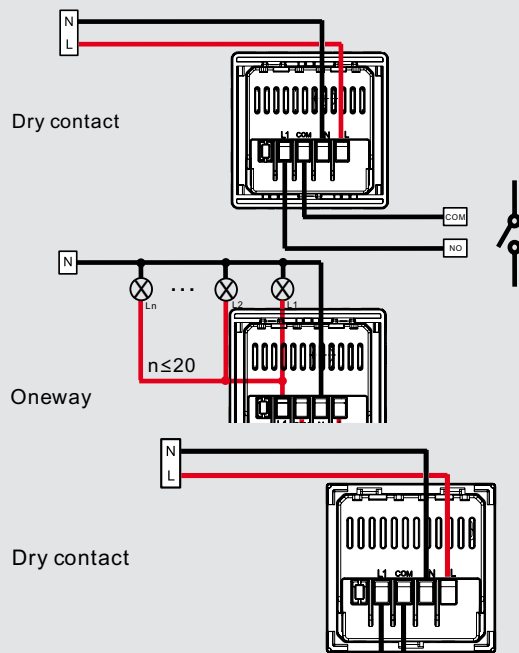

### Fixing

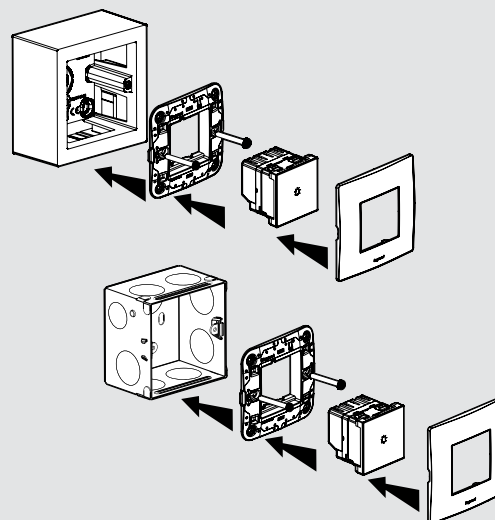

### Safety instructions

When use this product, please install a fuse or protective device to protect the product in the line of COM input, the protective device should be equal to 6 A / 100~240 V.

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location.

Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND.

Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees.

Only use genuine accessories.

### Technical data

#### 16 A touch switch 1-way - 2 modules


Cat.No 6 773 13

### Characteristics


|  |                 |                  |         |                            |                       |
|--|-----------------|------------------|---------|----------------------------|-----------------------|
|  |                 |                  |         | 100 - 240 V~<br>50 / 60 Hz |                       |
|  | -5 °C.../+45 °C | -10 °C.../+70 °C | ≤ 40 mm |                            | 1...4 mm <sup>2</sup> |

|        | ①      | ②       | ③       | ④     | ⑤     | ⑥     | ⑦           |
|--------|--------|---------|---------|-------|-------|-------|-------------|
|        |        |         |         |       |       |       |             |
|        |        |         |         |       |       |       |             |
| 240 V~ | 3000 W | 2000 VA | 2000 VA | 600 W | 600 W | 500 W | 8 A(FP=0.6) |
| 100 V~ | 1250 W | 800 VA  | 800 VA  | 250 W | 250 W | 300 W |             |

### Operation




### Wiring

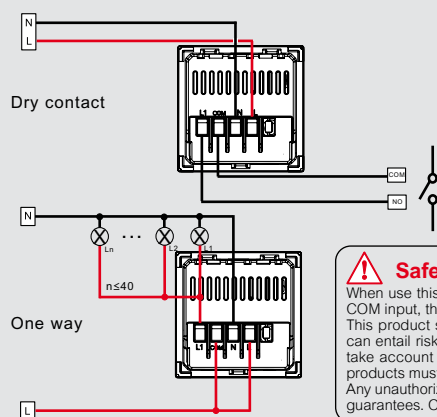

### Safety instructions

When use this product, please install a fuse or protective device to protect the product in the line of COM input, the protective device should be equal to 6 A / 100~240 V. This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.

### Fixing

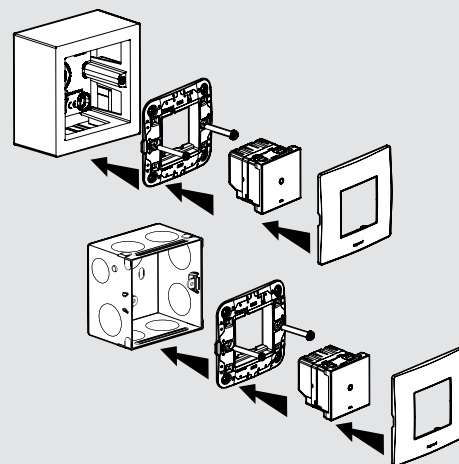

### Technical data

#### 300 W Universal led touch dimmer - 2 modules


Cat.No 6 773 15

### Characteristics

|  |                 |                  |         |                            |                       |
|--|-----------------|------------------|---------|----------------------------|-----------------------|
|  |                 |                  |         | 100 - 240 V~<br>50 / 60 Hz |                       |
|  | -5 °C.../+45 °C | -10 °C.../+70 °C | ≤ 40 mm |                            | 1...4 mm <sup>2</sup> |

|                 | R         | L              | C/L            |                |                |                    |
|-----------------|-----------|----------------|----------------|----------------|----------------|--------------------|
|                 |           |                |                |                |                |                    |
|                 |           |                |                |                |                |                    |
| 240 V~<br>50 Hz | 5...300 W | 5...<br>300 VA | 5...<br>300 VA | 5...<br>300 VA | 5...<br>300 VA | 5...75 W<br>≤ 10 x |
| 100 V~<br>60 Hz | 5...150 W | 5...<br>150 VA | 5...<br>150 VA | 5...<br>150 VA | 5...<br>150 VA | 5...37 W<br>≤ 10 x |

### Local dimming:

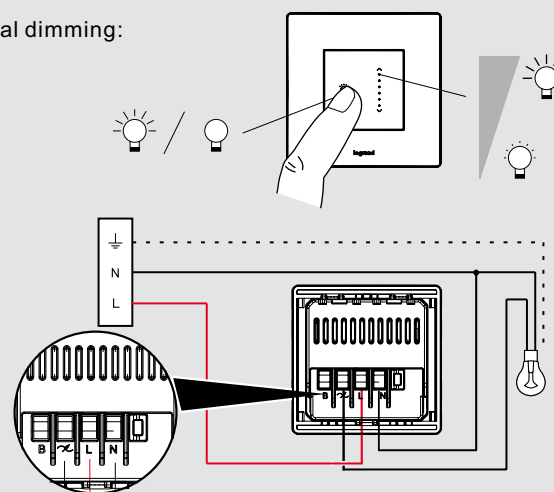


### Technical data




#### 300 W Universal led touch dimmer - 2 modules (contd.)

Cat.No 6 773 15

### Characteristics




Local+remote/auxiliar dimming:

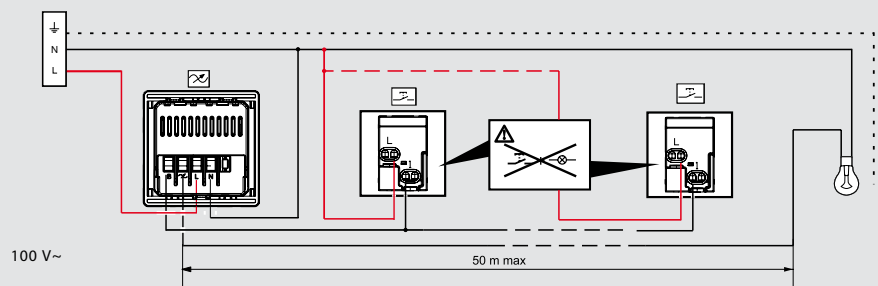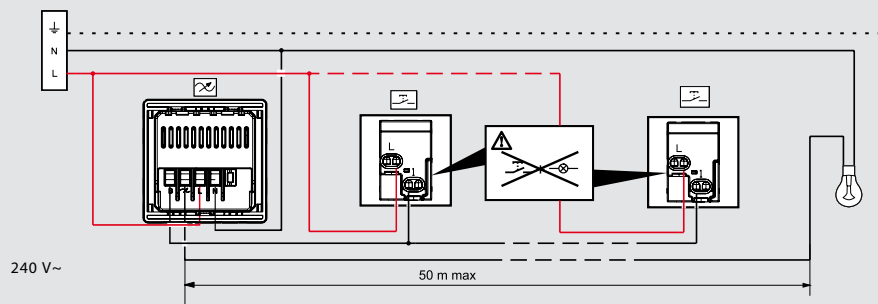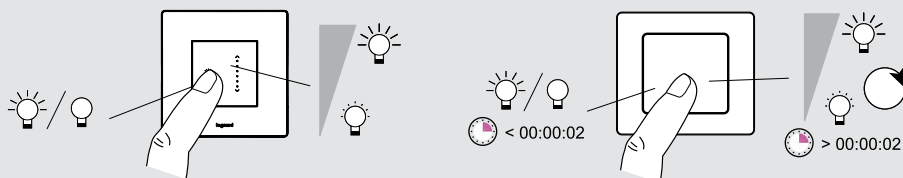


Auxiliary input connection


### Min. brightness settings

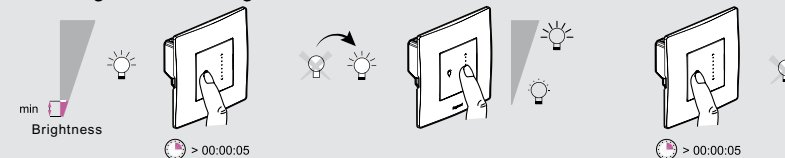


### CFL setting

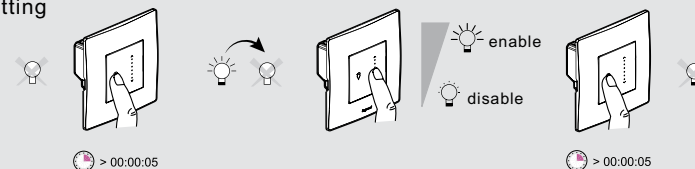


### Load type setting

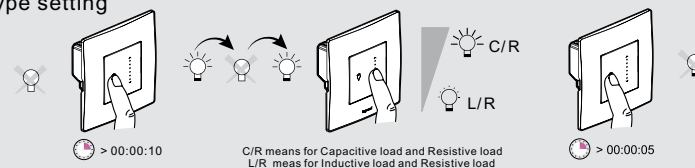

### Factory reset

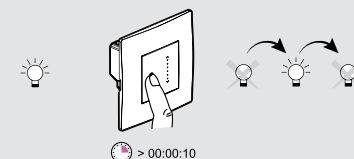

### Fixing

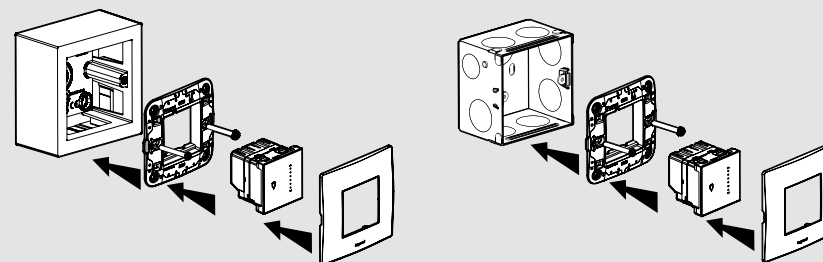


### ⚠ Safety instructions

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.

### Technical data

#### Remote for Fan and Light mechanism

Cat.Nos 6 772 52 / 6 774 52




|                                |                       |        |        |            |        |        |
|--------------------------------|-----------------------|--------|--------|------------|--------|--------|
| 40°<br>0°<br>240 V AC<br>50 Hz | ①                     | ②      | ③      | ④          | ⑤      | ⑥      |
| Max.                           | 1x2.5 mm <sup>2</sup> | 400 VA | 200 VA | 200 VA     | 150 VA | 100 VA |
|                                |                       |        |        | Ø26<br>Ø38 |        | 50 VA  |

### Utilization


1. Incandescent bulbs
2. Halogen lamp 230V~
3. Low voltage halogen lamps
4. Fluorescent tube light
5. Ceiling Fan (OFF + 4 Variable speed steps)
6. LED Lamps (Max 3 Units)

### Description


#### Infrared receiver and controller unit

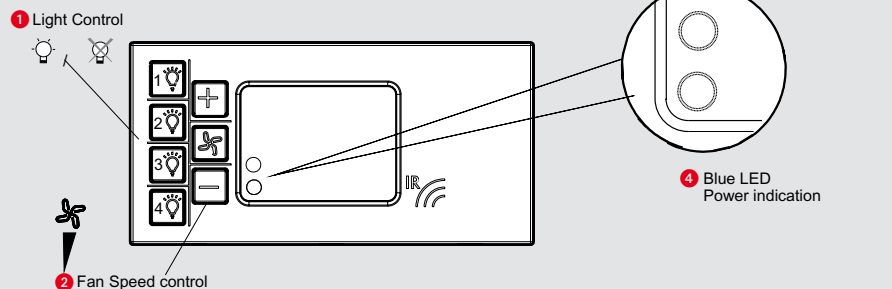


#### Infrared remote transmitter

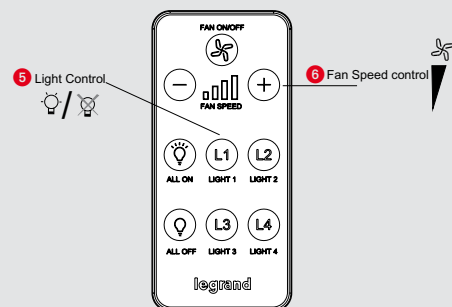

### Wiring diagram

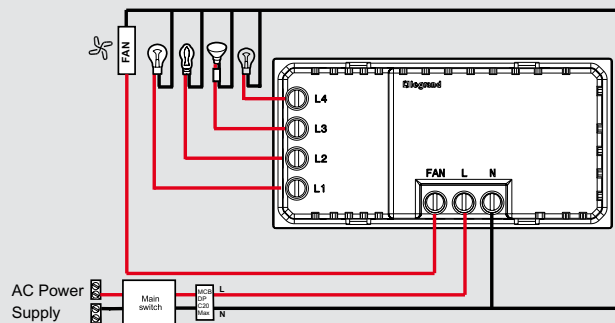

### Replacement of old battery

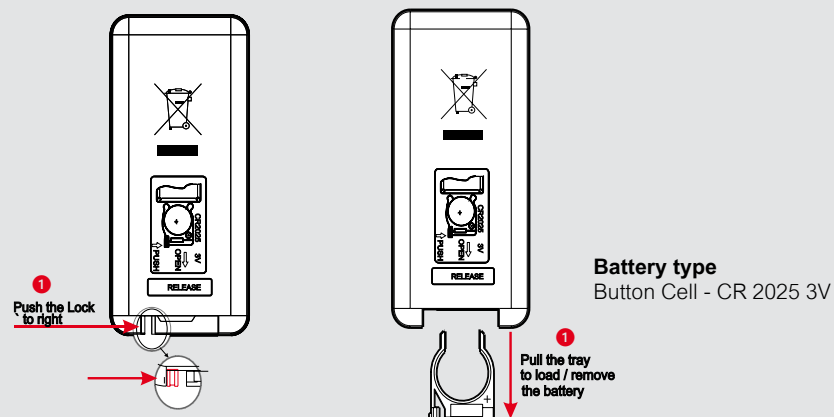

### Safety instructions

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Use only Legrand brand accessories.


GB 1E

### Technical data

#### 16 A Hotel Key Fob switch

Cat.Nos 6 772 53 / 6 774 53

### Characteristics



|  |                          |
|--|--------------------------|
|  | 16 A max                 |
|  | 16 A / 230 V~μ cosφ = 1  |
|  | 4 A / 230 V~μ cosφ = 0.6 |


### Utilization

|                              |        |       |        |        |        |
|------------------------------|--------|-------|--------|--------|--------|
|                              |        |       |        |        |        |
| 40°<br>0°<br>230 V~<br>50 Hz | 1      | 2     | 3      | 4      | 5      |
| Max.                         | 1800 W | 800 W | 400 VA | 800 VA | 100 VA |


- 1800 W lamp incandescent or halogen with ferromagnetic transformer.
- 800 W inductive (motor).
- 400 VA compensated fluorescent lamp.
- 800 VA fluorescent lamp with electronic ballast.
- 100 VA LED lamp.

**Important:** For load higher than indicated in the above table, use a contactor.


### Installation

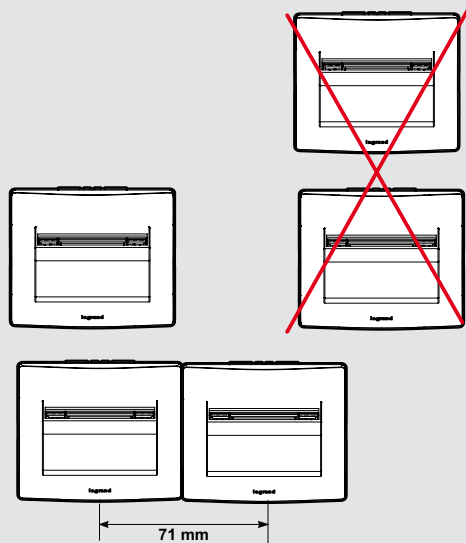


### Wiring

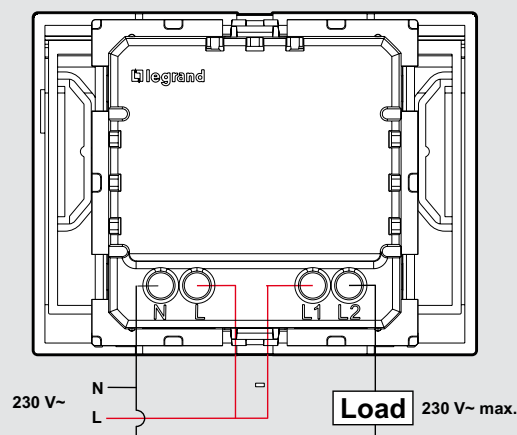


### Fixing

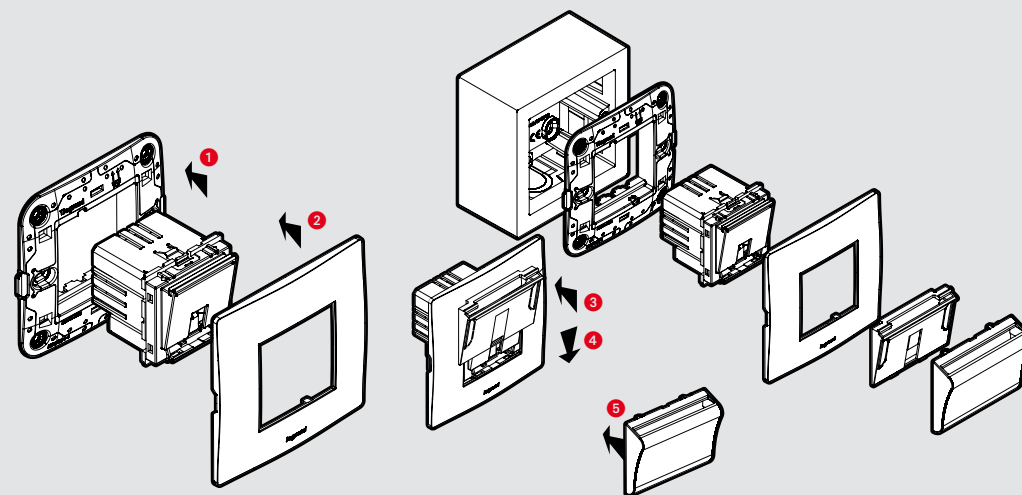

### Use

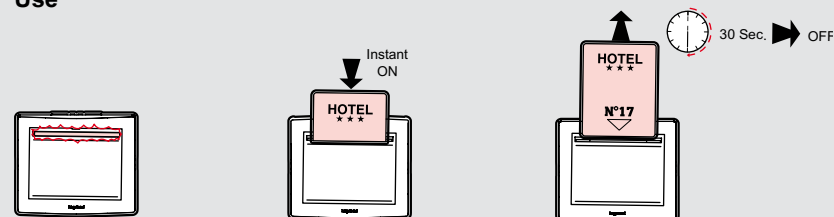

### Dismantling / Maintenance

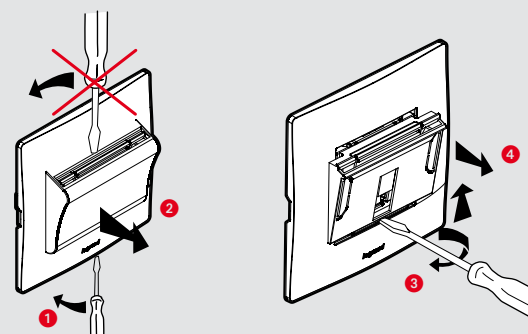

### Safety instructions

This product should be installed in compliance with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location.

Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.

Use only Legrand brand accessories.

GB IE

Technical data

Hotel DND and MMR unit

Cat.Nos 6 772 56 - 6 772 57

Description

Call indicator

Call control

Buzzer

Red

Green

A

B

C

D

E

Do not disturb

Please clean up

Wiring

230V AC

L

N

50 Hz

B

A

D

C

E

1

2

1

2

01

02


20

20

Technical data

Surge Protector 1 M

Cat.No 6 772 74



|                |  |
|----------------|--|
|                | 230 V~   |
| Up             | 1 kV   |
| Uc             | (L/N - L/PE)<br>(N - PE)<br>250 V~ max<br>230 V~ |
| In (8/20).     | 2 kA   |
| Icc max.       | 2,5 kA   |
| I <sub>L</sub> | 10 A   |
| I max (8/20).  | 4 kA   |

Installation method

PE

MCB DP C20 Max.

Main switch

N L


L

N

⏏

Make sure the power supply is disconnected before any intervention.  
Strictly comply with instructions for installation and use.

Operation

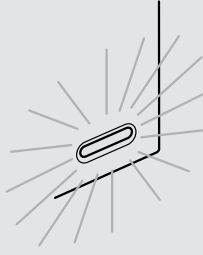

Green indicator lamp

Operational protection

Recommendation

Regularly check that the green LED is on.  
-When LED is off, change the product


Safety instructions

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.  
Use only Legrand brand accessories.

42

## NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

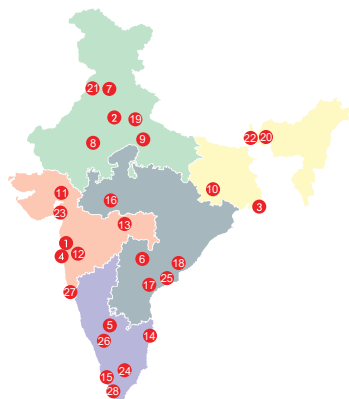

## Head offices

- 61 & 62, 6<sup>th</sup> Floor,  
Kalpataru Square, Kondivita Road,  
Off Andheri-Kurla Road, Andheri (E),  
**MUMBAI** – 400 059.  
Tel : [022] 3041 6200  
Fax : [022] 3041 6201  
Website : [www.legrand.co.in](http://www.legrand.co.in)

## Regional sales offices

- B-225, 4th Floor, Okhla Industrial  
Area, Phase -1,  
**NEW DELHI** – 110020.  
Tel : [011] 3990 2200, 2699 0046,  
[011] 2699 0028 / 29 / 30 / 31  
Fax : [011] 2699 0047 [INNOVAL](#)
- Unit no 1203, Ambuja Eco Centre,  
Sector 5, Salt lake,  
**KOLKATA** – 700 091. [INNOVAL](#)
- C/203, Corporate Avenue, Atul Projects,  
Near Mirador Hotel, Chakala,  
Andheri - Ghatkopar Link Road,  
Andheri - East, **MUMBAI** – 400 099.  
Tel : [022] 6230 1000 [INNOVAL](#)

- Ferozes Manor, Situated at 58  
Hospital Road, Shivaji Nagar,  
**BANGALORE** – 560 001.  
Tel : [080] 6822 0000 [INNOVAL](#)

- Prestige Phoenix, 1st Floor,  
Next to Lifestyle Building,  
Begumpet,  
**HYDERABAD** – 500 016. [INNOVAL](#)

## Branch offices

- Unit No. 203, Tower B Bestech  
Business Towers, Sector-66, Mohali,  
**CHANDIGARH** – 160017.  
Telefax : [0172] 5019 008 [INNOVAL](#)
- Building No-128, Mansarovar Link Road,  
Gopalpura Bypass, Mohan Nagar,  
Near Ridhi Sidhi Flyover,  
**JAIPUR** – 302 018.  
Tel : 0141-2208 665 [INNOVAL](#)
- 209-A, 2<sup>nd</sup> Floor, Cyber Heights,  
Opp. Indira Gandhi Pratishthan,  
Vibhuti Khand, Gomti Nagar  
**LUCKNOW** – 226 010.  
Tel : [0522] 431 9316 [INNOVAL](#)
- 202 & 203, Sunrise, Forum 100,  
Burdwan Compound, Lalpur,  
**RANCHI** – 834 001.  
Tel : [651] 660 5400
- A 101-102, Mondeal Heights,  
Besides Novotel Hotel, Sarkhej  
Gandhinagar Highway (S G Highway),  
**AHMEDABAD** – 380 015.  
Tel : [079] 6134 0555 [INNOVAL](#)
- 8th Floor, Pinnacle Park Avenue,  
Opp. Law College, Law College Road  
Next To German Bakery,  
Shivaji Nagar, **PUNE** – 411 004.  
Tel : [020] 6729 5601 / 600 [INNOVAL](#)

- Plot No.95, 2nd Floor, Shreyash  
Heights, VIP Road, Ramdaspeth,  
**NAGPUR** – 440 010.  
Tel : [0712] 2440 900

- 10 B, Prestige Center Court, Office Block,  
Vijaya Forum Mall, #183, N.S.K. Salai,  
Vadapalani, **CHENNAI** – 600 026.  
Tel : [044] 6612 2800 [INNOVAL](#)

- J. B. Manjooran Estate,  
Door No 50/1107 A9, 3<sup>rd</sup> Floor,  
Bye Pass Junction, Edappally,  
**COCHIN** – 682 024.  
Tel : [0484] 6604 700 [INNOVAL](#)

- 204-205, Megapolis Square,  
579, M G Road,  
**INDORE** – 452 001.  
Tel : [0731] 4999 891

- MF-2, Datta's Lords House,  
Jammie Chettu Street, Mogalrajapuram,  
**VIJAYAWADA** – 520 010.  
Tel : [0866] 248 2393/6393

- Plot No. 359, Saheed Nagar,  
2<sup>nd</sup> Floor,  
**BHUBANESWAR** – 751 007.  
Tel : [0674] 254 0623

- Unit - 1 & 2, Vijay Park,  
Main Chakrata Road,  
**DEHRADUN** – 248 001.  
Uttarakhand.  
Tel : [0135] 661 6100 [INNOVAL](#)

- House No. 97, Ground Floor,  
Rajgarh Main Road,  
Opp. City Heart Nursing Home,  
**GUWAHATI** – 781 007.

## Area offices

- Cabin No. 9, 2<sup>nd</sup> Floor,  
Madhok Trade Centre,  
Madhok Complex, Ferozpur Road,  
**LUDHIANA** – 141 001.  
Tel : [0161] 277 0301
- 94, Udham Singh Sarani,  
Ground Floor, Ashrampara,  
**SILIGURI** – 734 001.  
Tel : [0353] 264 1067
- A-207, Universal Business  
Center, Near Madhuvan circle,  
L.P. Savani Road, Adajan,  
**SURAT** – 395 009.  
Tel.: [0261] 263 3861 [INNOVAL](#)
- Aparna Towers, 1<sup>st</sup> Floor, 2/3,  
Bypass Road,  
**MADURAI** – 625 010.  
Telefax : [0452] 230 8414
- 43-9-205, 3<sup>rd</sup> Floor, Plot No. 10,  
Subbalakshmi Nagar,  
Opp. More Super Market,  
**VISHAKAPATHANAM** – 530 016.  
Tel.: [0891] 273 5652 / 2739363 [INNOVAL](#)
- B-5, 1<sup>st</sup> Floor, Thirumalai Towers,  
723, Avanashi Road,  
**COIMBATORE** – 641 018.  
Tel.: [0422] 668 3200 [INNOVAL](#)
- 515 & 516, Gera Imperium Grand,  
Patto centre, Panaji  
**GOA** – 403 001. [INNOVAL](#)
- 1st Floor, Cordial Bharathi,  
Nanthancodu,  
**THIRUVANANTHAPURAM**,  
KERALA – 695 003 [INNOVAL](#)

## Technical assistance from Legrand

Telephonic technical assistance for selection of products, technical information, guidance, wiring diagrams and estimation is now made available to you at each Regional Office. Contact the Technical Officer of Legrand at the following telephone numbers

**New Delhi** : Tel.: [011] 2699 0028, 3990 2200  
**Kolkata** : Tel.: [033] 4021 3535 / 36  
**Mumbai** : Tel.: [022] 6230 1000  
**Bangalore** : Tel.: [080] 6822 0000  
**Hyderabad** : Tel.: [040] 4567 1717

For other places, contact the nearest Regional / Branch / Area offices

[customer.care@legrand.co.in](mailto:customer.care@legrand.co.in)