



BUS/KNX SOLUTIONS

ACTIVE CONTROL OF LIGHTING,
SHUTTERS, TEMPERATURE AND
SOCKET OUTLETS

CATALOGUE
PAGES
→ INSIDE

THE **GLOBAL SPECIALIST**
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES





NEW GENERATION LIGHTING MANAGEMENT

A global specialist in electrical infrastructures in buildings and a major force in new generation buildings, Legrand has developed its system to provide complete control of a building: BUS/KNX solutions.

THE NEW LEGRAND BUS/KNX RANGE MEETS THE SPECIFIC NEEDS OF COMMERCIAL SECTOR BUILDINGS

Optimised energy consumption


Designed ideally for low consumption accredited constructions, KNX solutions provide optimum management of lighting, shutters, socket outlets and ventilation: combined with energy management and supervision solutions, these "Smart Grid Ready" solutions allow you to optimise operating procedures in your installation according to your consumption. Legrand therefore contributes to reducing a building's overall operating costs and meeting the requirements of LEED and BREEAM buildings, etc. so that you can provide a perfect response to your customers' energy performance requirements.

Increased comfort

Legrand BUS/KNX solutions have the ability to manage all types of light source (LEDs, DALI, 1-10 V ballasts, etc.) in response to different situations (daylight, presence/absence, dimming, scenarios) making the user's daily life easier by adapting to their needs and living/working habits.

Even greater flexibility

With simple programming, Legrand BUS/KNX solutions make it possible to reconfigure the installation in a building really easily: no need for additional wiring!

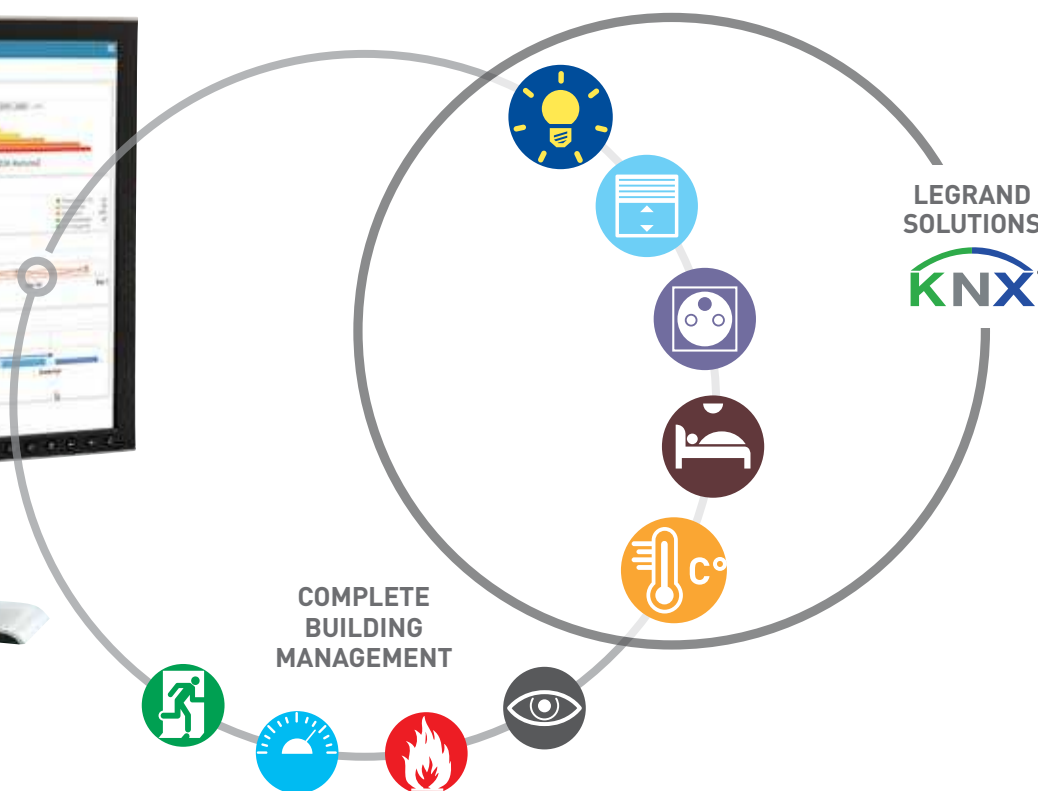

A worldwide protocol in building management systems, KNX is an open, interoperable standard providing any user with great freedom of use and long-life installations. Recognised by ISO/IEC 14543-3-x as the international standard for home and building control, KNX meets the requirements of two European standards, CENELEC EN50090 and CEN EN 13321-1.

COMPLETE BUILDING MANAGEMENT

Beyond providing optimum control of lighting and shutters, the KNX protocol is interoperable with all applications installed in commercial sector building (heating and ventilation, fire alarms, emergency lighting, etc.), whoever supplies them. It can therefore be integrated into an active general building management system, making it possible to display consumption or to be alerted when a fault occurs!

COMPLETE HIGH-PERFORMANCE SOLUTIONS

The new Legrand BUS/KNX offer, with its complete high-performance solutions, meets the specific needs of a commercial sector building, so you can ensure that your customers have an optimised, flexible and open installation.





06

OPTIMISED CONTROL

A core business for Legrand, control is enhanced with multiple possibilities: lighting comfort, environment scenarios, combinations of several functions, etc. Discover the Legrand BUS/KNX offer, combining performance, aesthetics and comfort for a complete, optimised response to your customers' needs.

12

SIMPLIFIED INSTALLATION

Installed in a suspended ceiling or cabinet, controllers are easy to wire and can control all types of load.

16

FLEXIBLE, RELIABLE, AND CONSISTENT CONFIGURATION

Having access to ETS, the only tool that connects all KNX devices to a strong, well known and shared configuration method, ensures a good operating system. Legrand also offers the option of using its special configuration tool to quickly manage operating settings; it combines ease of use with reliable settings.

OPTIMISED CONTROL

An essential solution for special or occasional applications, the Legrand BUS/KNX control unit manages lighting (ON/OFF, dimming, scenes, forcing), roller shutters (raise/lower/stop), awnings, and other client devices. A core business for Legrand, control is enhanced with multiple possibilities: lighting comfort, environment scenarios, combinations of multiple functions, etc. Discover the Legrand BUS/KNX offer, combining performance, aesthetics, and comfort, for a full and optimised response to your customers' needs.



**Really clever,
infinitely
stylish!**




ARTEOR

MANUAL CONTROL UNITS

One offer, Many designs

Combining performance with aesthetics, control units are available in multiple finishes.

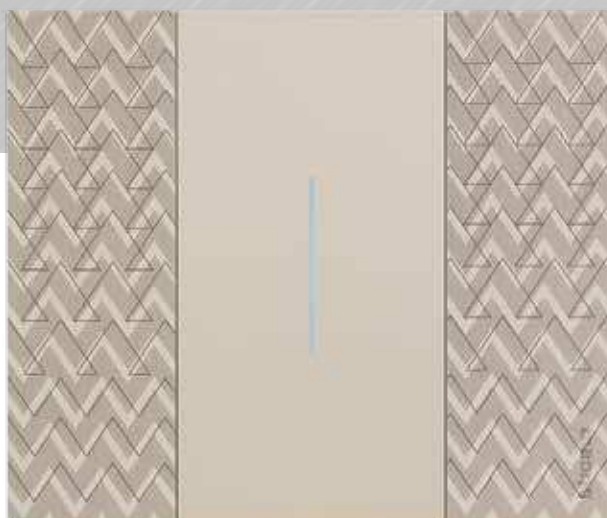

LIVING NOW

A wide range of mechanisms for everyday comfort

There are several types of mechanism available for user convenience.

Functional diversity

KNX control units provide multiple functions for managing lighting, shutters, scenarios, socket outlets and temperature.



TEMPERATURE CONTROL UNIT

"Basic" functions

Optimised ergonomics thanks to programming

- ON/OFF switching
- Dimming up and down
- Roller shutters: raise, lower, stop
- Scenario: send a scenario number, save scenario
- Send one or two values: lighting level, position of shutters/slats, etc.

"Advanced functions"

The Legrand plus!

As well as simple functions, Legrand offers you multi-control functions for a more comprehensive management of your installation:

- Send priority: ON/OFF locking and unlocking
- Send incrementing commands (by scrolling through the options): each press refers to a command. Example: 1st press = comfort (command 1), 2nd press = stand-by (command 2), 3rd press = eco (command 3), 4th press = comfort (command 1)
- Dual action transmission: send two commands. This function allows products which do not have a scenario function to be linked to a scenario.
- Mode 1/Mode 2 conditional transmission: send a command or a second different command, depending on a condition being met. The control unit has the ability to send commands to different circuits depending on an event.



LIVING NOW

Living Now

Indian standard installation - range of cover plates - 1 module installation

WHITE



WHITE - KW
(Material: techno polymer)



GOLD - ZW
(Material: zamak)



ICE - DW
(Material: techno polymer)



MOON - NW
(Material: zamak)



SKY - DA
(Material: techno polymer)



PIXEL - MW
(Material: techno polymer - pixel effect)

SAND



SAND - KM
(Material: techno polymer)



COPPER - ZM
(Material: zamak)




OAK - LM
(Material: wood)



OPTIC - MM
(Material: techno polymer - pixel effect)

Living Now

Indian standard installation - range of cover plates - 1 module installation

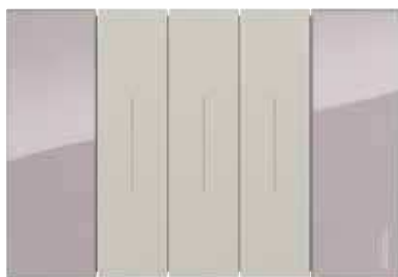

AURA - DM
(Material: techno polymer)



BLACK - KG
(Material: techno polymer)



SPACE - NG
(Material: zamak)



WALNUT - LG
(Material: wood)



NIGHT - DG
(Material: techno polymer)



STEEL - ZG
(Material: zamak)

Notes:

- The cover plate/cover combinations shown in these pages are purely indicative. Each cover plate can in fact be combined with covers of any colours, as required by the customer (white, sand and black).
- The zamak and wood finishes are obtained using non-mass production procedures. The differences among the various cover plates are therefore a distinguishing valuable element.

MANUAL CONTROL UNITS

LEDs for clear information

All controls, whether a push-button or a touch plate, are fitted with RGB LEDs, each of which can produce twelve different colours: green, blue, white, orange, gold, yellow, turquoise, cyan, light blue, violet, magenta, purple.

Configurable using ETS software (see p. 16), LEDs display the load status and status feedback and can be used to customise the control unit status using colours, flashing, and brightness.

Status displays

- Status feedback from actuators/ controllers: ON or OFF
- System status feedback: context information indicated by the BUS.
Examples: over-consumption, broken lamp, too much wind for roller shutters, etc.

Customizing the status

- Adjustment of the colour and behaviour through different modes.
The default modes are:
 - ON = steady green
 - OFF = steady blue
 - Alarm = flashing red (not modifiable)
 - Control de-activated = steady orange
- Adjustment of brightness from 0 to 100% according to three values:
 - Normal (adjustable value)
 - Eco (adjustable value)
 - Stand-by (non-adjustable value)



“ Set colour
and brightness
according
to needs



Thermoregulation control

The temperature control panel is a flush mounted 1,6" backlit display with 4 push buttons to manage HVAC systems as fan coil unit or floor heating.

THE +

- in line with Legrand design
- Flexibility: can be combined with several types of HVAC controller

DETECTORS

Energy performance and operating performance

A sustainable approach

Apart from simple ON/OFF and dimming controls, detectors provide access to the advanced automation functions required in any "green" building:

- stand-by/maintained dimming
- programmed lighting maintenance
- scenario triggering dependent on presence/absence, natural light levels or the time

Flexibility & Efficiency

- Detectors provide an installation with flexibility: their operation and programming can be adapted according to external parameters (over-consumption, alarm, etc.)
- Detectors constantly measure daylight levels. In combination with controllers they provide a better understanding of the detection area and makes it possible to adapt lighting in response to natural light levels.

Note: it is possible for there to be several dimming levels within a single space!

Supervision informations

KNX detectors provide any supervision system with useful key information:

- indication of presence
- load status and dimming level (as a %)
- light level in real time (in lux)

Several fixing systems for optimum flexibility of installation

Suspended ceiling

The detectors are installed using springs (supplied) or in a Batibox or can be surface mounted.



SOLUTIONS FOR CORRIDORS, OUTDOOR CAR PARKS, BASEMENTS AND WORK AREAS

“
**Perfect detection
in any location!**

The power of two detection technologies

Infrared detection (PIR)

Suitable for detecting wide amplitude movements such as walking, infrared technology provides optimum lighting management in passage areas such as corridors.



CAT.NO 0 489 21
PIR detection with
270° movable head
Range 20 m
IP 55
Wall or ceiling
surface mounting

CAT.NO 0 489 19
360° PIR double detection
Lateral range 2 x 12 m
IP 20
Ceiling mounted

PIR detection + with high density lens

Infrared technology is suitable to detect wide amplitude movements but with its high density lens this sensor is able to detect the thinnest movement also and it is adapted for passage but working areas also.



CAT.NO 0 489 22
360° PIR detection
Range 8 m
IP 20
Ceiling mounted

Infrared + ultrasound detection (PIR/US)

The exclusive coupling of two technologies consolidates the presence information and guarantees the detection of smaller movements for greater effectiveness, which makes the difference in work areas.



CAT.NO 0 489 18
360° PIR/US detection
Range 8 m
IP 20
Ceiling mounted

Smart detection

Thanks to the combination of ETS and the 0 882 40 smart configuration tool, it is possible to set/modify detector parameters simply and quickly for optimum detection!


→ SEE PAGE 16

SIMPLIFIED INSTALLATION


Equipped with different outputs, controllers (also called actuators) receive commands from the control units and act on lighting or shutter loads. Their installation may take one of two from factors.

DISTRIBUTED INSTALLATION

In a system it consists in having the controllers locally installed in false ceilings where there are the load and not in the main cabinet as usual.

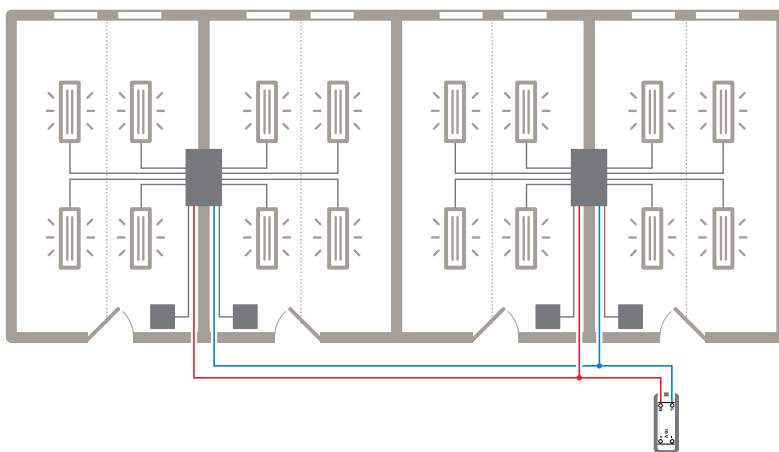

DECENTRALIZED
SMART
INSTALLATION

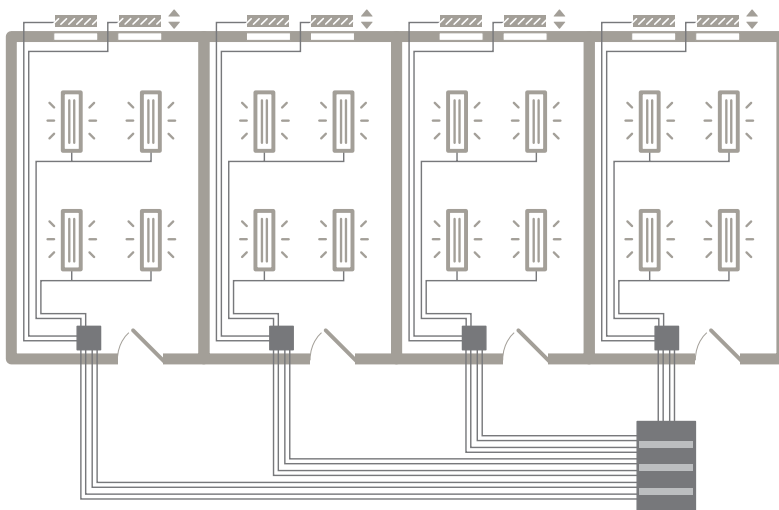

CENTRALIZED
INSTALLATION

False ceiling controllers for dimming

These power units control lighting loads. In order to operate, they have to be linked to one or more detectors and/or remote auxiliary control units. Because they are situated near the loads to be controlled, they provide savings in the cables to be routed and in wiring time.

They also save space in the consumer unit.



FOR DALI PROTOCOL,
4 OUTPUTS

FOR 1-10 V BALLASTS,
4 OUTPUTS

“Quicker and easier cabling

Room Control Unit

These modular controllers with integrated consumption measurement are fitted with output contacts for controlling:

- all types of ON/OFF load (lighting, roller shutters, contactors, motors, etc.)
- a DALI dimming output (64 ballasts max.)
- an on-board energy meter

Loads are managed by the control units to which they are linked: either BUS/KNX control units, or wired connection input terminals (switches, push-buttons, voltage free contacts).

They also provide a wide range of functions: ON/OFF or dimming lighting control, DALI, roller shutter and ventilation control.

These DIN controllers offer the



16 INPUTS
16 OUTPUTS
12 MODULES

(Available with 8 inputs,
10 outputs, 8 modules)

possibility of controlling several circuits (voltage free contacts included) within a reduced space, and include embedded automation: an ideal solution for hotel room management!

Installed in a modular cabinet, they are the ideal solution for small spaces (bedrooms, conference rooms, offices).



CENTRALIZED INSTALLATION

This consists of a traditional installation using modular products installed in the electrical panel.

Note: all controllers can be controlled for each output by a detector and/or a BUS/KNX control unit.

**easy
maintenance**

Controllers

Modular controller ON/OFF

- Relay outputs to switch lighting loads with advanced operating mode.



MODULAR ON/OFF
CONTROLLER

Modular controllers for Dimming

- DALI dimming management through DALI group control or individual DALI luminaire control.
- 1-10 V dimming management with switching operating mode.
- universal dimming manages all lights of lighting loads.



MODULAR DALI
CONTROLLER

Modular controllers Multi-applications

- Relay outputs grouped through output channels configurable to manage different kind of equipments : lights, power sockets, shutters, HVAC.
- Independent input channel operating as universal interface with traditional wiring devices.



MODULAR CONTROLLER
MULTI-FUNCTION

Modular controllers for HVAC

- ON/OFF and 1-10 V controllers manage any kind of fan coil units.



MODULAR FCU
CONTROLLER

KNX INFRASTRUCTURE PRODUCTS

Power supply

- 320 mA and 640 mA power supplies provide power for one BUS/KNX line. There is a built-in filter to prevent the short-circuit of messages from the BUS.
- The line coupler provides galvanic insulation between lines. This is necessary to extend the system over 64 participants.



KNX 640 mA
POWER SUPPLY

Interface

- BUS/KNX interfaces - voltage free contact, available in a modular version or for flush-mounting, allow voltage free products (switches, push buttons, alarms, etc.) to be connected to BUS/KNX.
- A binary interface is also available allowing the connection of probes, sensors which need to distinguish between two levels of signal.



BUS/KNX INTERFACE

Communication & Control

Legrand BUS/KNX modules can send/receive commands to different controllers in the system.

- A BUS/KNX - IP router makes the links between the BUS/KNX infrastructure and the IP network remotely configure the installation with ETS or enable interconnection among different KNX networks via the IP infrastructure.
- A BUS/KNX coupler to connect BUS/KNX line with galvanic isolation.



KNX / IP ROUTER


Connection

- BUS/KNX cables are available in a single pair version (red/black) or 2 pairs (red/black, yellow/white).
- The black/red BUS/KNX connector is used to extend, split the cable or simply connect the products.

FLEXIBLE, RELIABLE AND CONSISTENT

ETS SOLUTION

ETS is a manufacturer independent software that has to be used to configure and commission KNX devices, as well as plan, design, commission and diagnose entire KNX installations with KNX certified products.

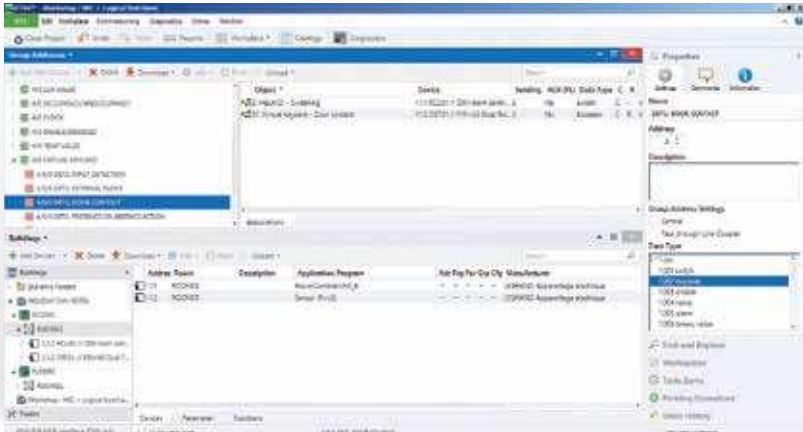

LEGRAND SOLUTION

SMART CONFIGURATION TOOL:
AN ASSET FOR COMMISSIONING
AND MAINTENANCE






LEGRAND CLOSE UP APP



Configuration gateway
Cat.No 0 882 40

- In a hotel room there is the need to manage everything when the customer is present: lighting, sockets, HVAC. When the customer enters the room the entrance lights are automatically turned ON and when he puts the badge in the holder the HVAC and the sockets are also enabled. The customer is able to manage everything through the different control units, choosing the conditions he prefers according to his mood or needs.



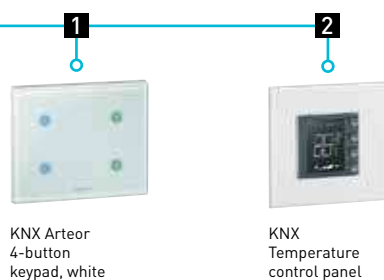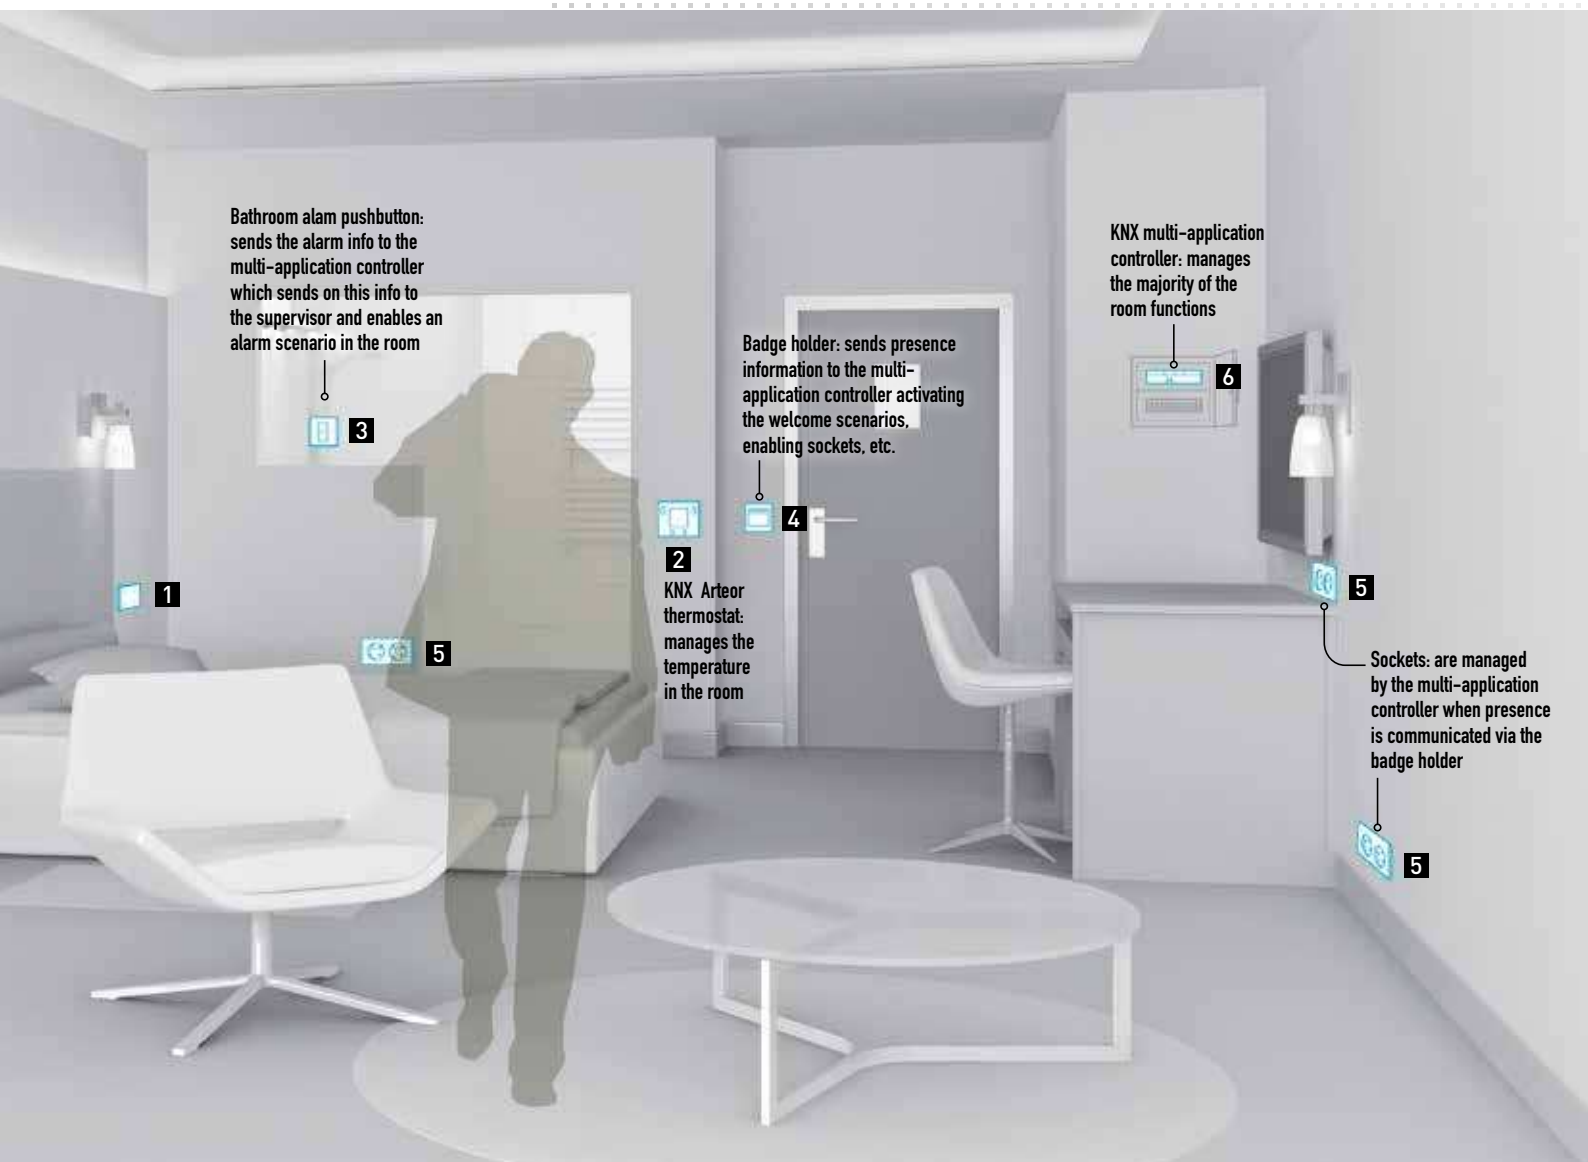

Cat.No	Qty	Cat.No	Qty	Cat.No	Qty
5 740 37	1 per room	5 742 03	2 per room	0 674 64	1 per room




Open space


- Presence detection
- Movement detection
- Light level measurement
- Dimming

BUS/KNX SOLUTIONS PROVIDING AREAS WITH FLEXIBILITY

In an office suite, you need to be able to refurbish and re-arrange spaces without touching the wiring and without moving equipment. All you have to do is link detectors and control units to the luminaires, without restriction, with simple programming using the ETS software.

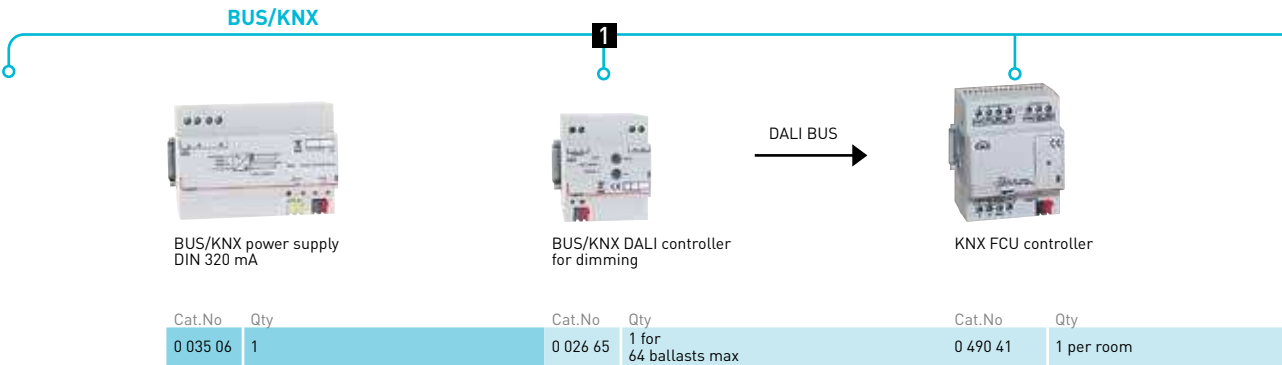

Common solution for several areas

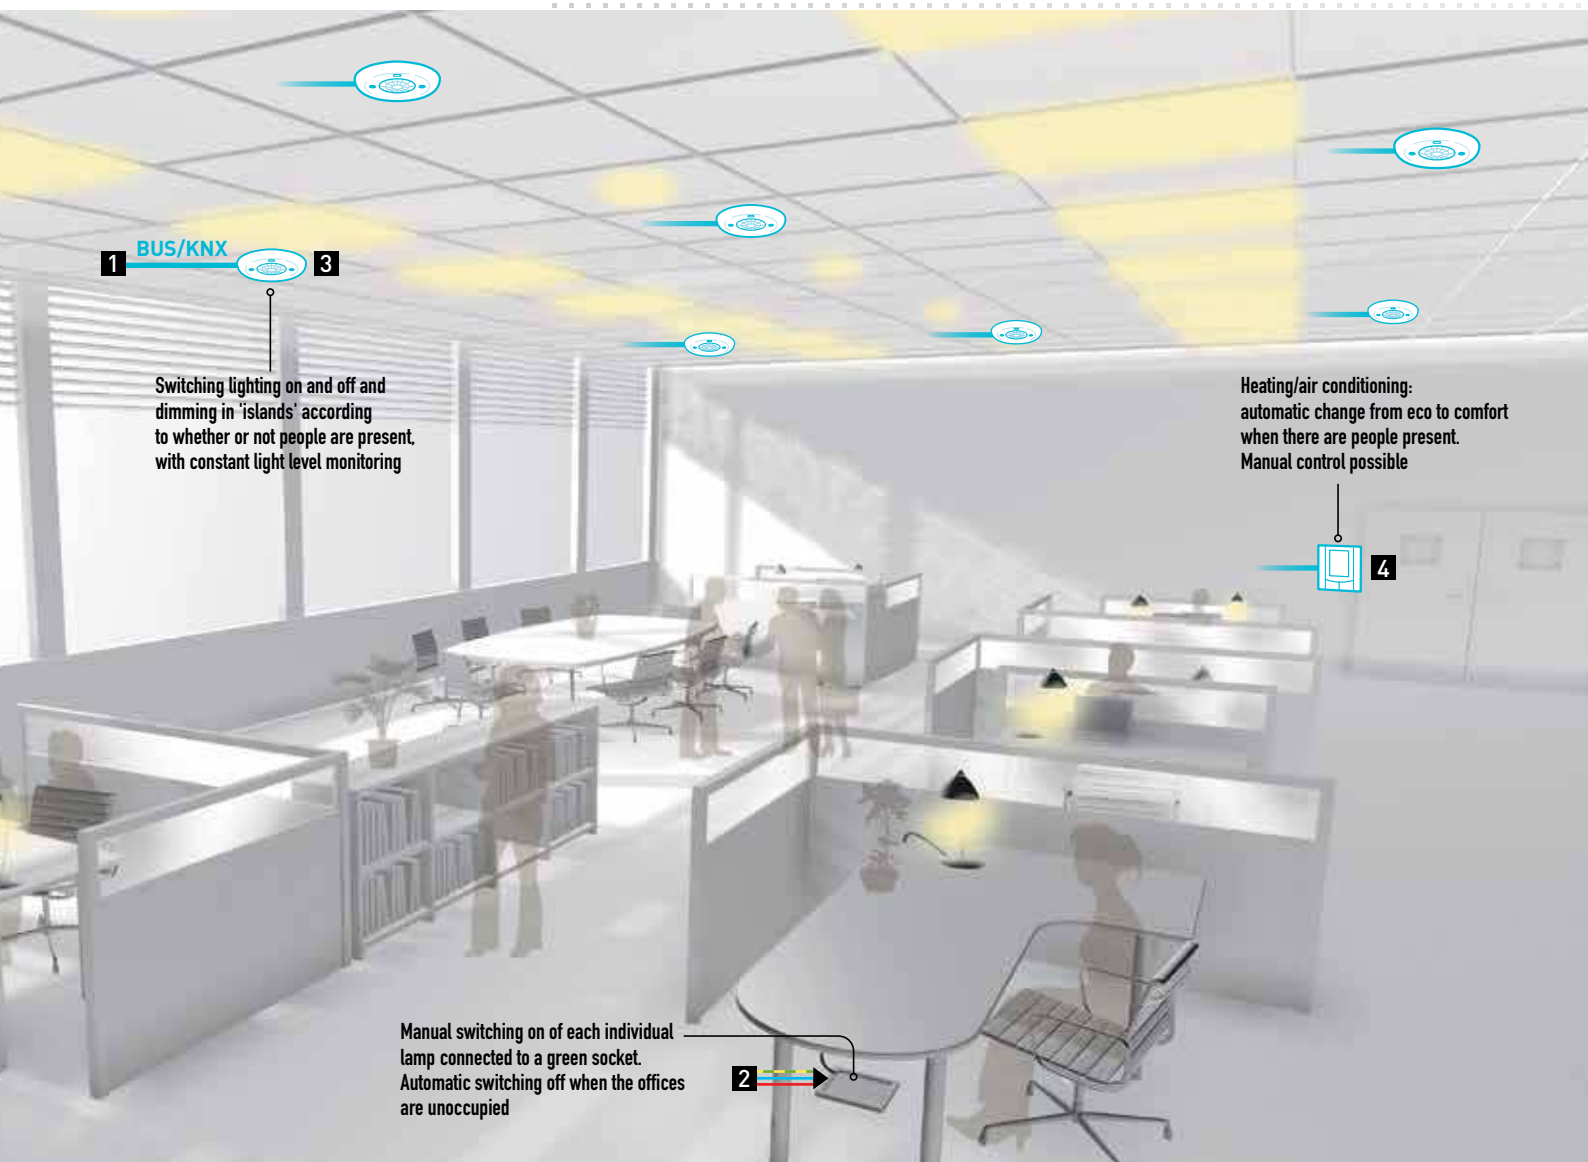

Controller multi application
20 outputs for shutters and for lamps
Connected to screen socket

Cat.No	Qty
0 026 78	1

ELECTRICAL PANEL

OFFICE SUITE



360° KNX infrared+ultrasound lighting management sensor
Range 8 m dia.

Cat.No	Qty
0 489 18	1 every 6 m



Temperature control panel

Cat.No	Qty
0 674 64	1 for the office suite

Cat.No	Qty
0 488 77	1 for 16 control units

Cat.No	Qty
0 784 61L	1 per workstation



Meeting room

- Presence detection
- Light level measurement
- Dimming
- Scenario control
- Manual switch-on
- Management of shutters, screens

In a meeting room, you need to be able to control the lighting but also the shutters, screen, ventilation, etc. individually or via programmed scenarios.



BUS/KNX - IP gateway

Cat.No	Qty
0 035 45	1



BUS/KNX power supply

Cat.No	Qty
0 035 07	1 per KNX line

BUS/KNX

1



BUS/KNX controller multi-applications for lighting ON/OFF control and shutters control

Cat.No	Qty
0 026 74	1 for 4 circuits

2



BUS/KNX universal dimming controller

Cat.No	Qty
0 026 54	1 for 2 circuits

Common solution for several areas



BUS/KNX

1 2 3 →

Power supply to light fittings, HVAC, shutters, screen, video projector: equipment in the electrical panel



4

On pressing the control unit at the entrance to the room, the lighting is automatically switched on/off or dimmed depending on whether or not there are people present and on the level of daylight.



5

As soon as someone enters the room, manual switching on/off and dimming of ceiling and panel lights

CONTROLLED CIRCUITS

One ON/OFF lighting circuit for panel/screen
LEDs or halogen

2 dimming circuits:
one panel side,
one room side
Dimmable LEDs

2 shutter circuits:
up/down/stop
1 screen circuit: up/down
1 HVAC circuit: comfort/eco

ELECTRICAL PANEL

OFFICE SUITE



BUS/KNX lighting management sensor
360° infrared + ultrasound
Range 8 m

Cat.No	Qty
0 489 18	1 every 6 m



Control for 2 ON/OFF and dimming lighting circuits

Cat.No	Qty
5 742 03	1 per door

Reception area

- Presence detection
- Movement detection
- Light level measurement
- Dimming

In a reception area, you need lighting to come on automatically when there are people present and for it to adjust according to the natural light level.
In corridors you want lighting to come on only when people are passing by and only if the natural daylight is insufficient.



BUS/KNX - IP gateway

Cat.No	Qty
0 035 45	1

> page 35




BUS/KNX power supply

Cat.No	Qty
0 035 07	1 per KNX line

> page 35

BUS/KNX

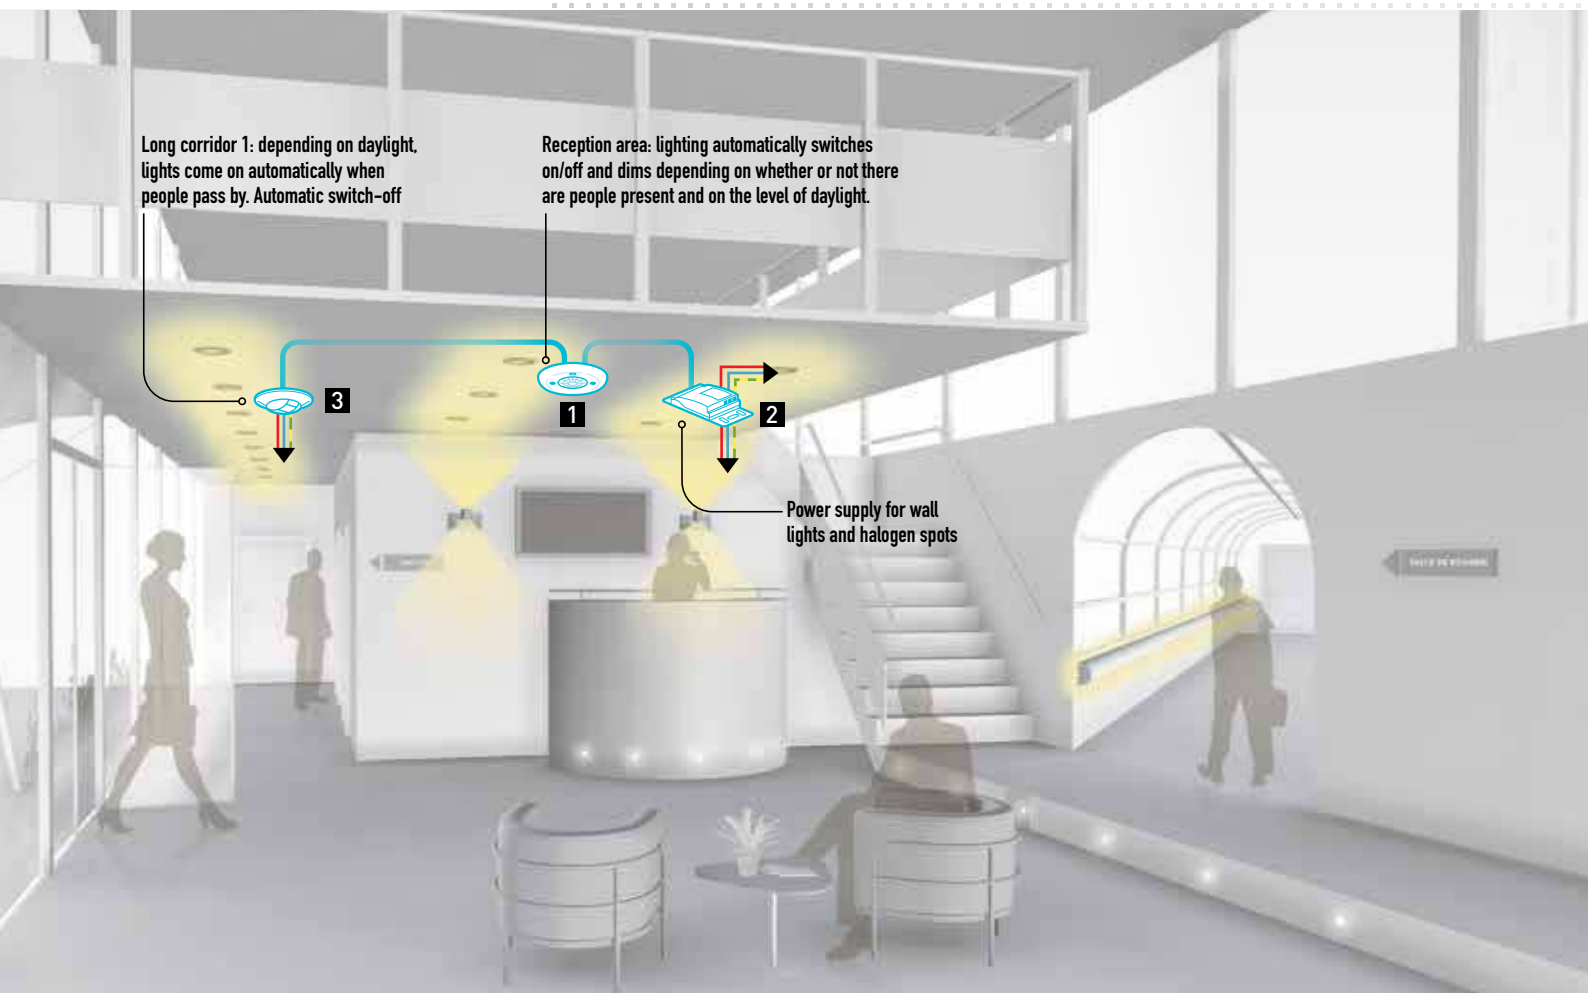

Long corridor 1: depending on daylight, lights come on automatically when people pass by. Automatic switch-off

Reception area: lighting automatically switches on/off and dims depending on whether or not there are people present and on the level of daylight.

Power supply for wall lights and halogen spots

CONTROLLED CIRCUITS

Long corridor 1
Flush-mounted LED spots

Reception area
Wall lights and halogen spots

Long corridor 2
Wall lights



BUS/KNX lighting management sensor 360° infrared + ultrasound
Range 8 m

Cat.No	Qty
0 489 18	1 every 6 m

> page 33



BUS/KNX controller in suspended ceiling for dimming DALI lamps

Cat.No	Qty
0 488 88	1 for 2 circuits

> page 34



BUS/KNX lighting management sensor 2 x 180° for long corridors
Range 2 x 12 m

Cat.No	Qty
0 489 19	1 every 20 m

> page 33



ON/OFF or dimming 1-10V BUS/KNX controller in suspended ceiling

Cat.No	Qty
0 488 87	1 for 4 circuits

> page 34



Classroom

- Presence detection
- Light level measurement
- Dimming

In a classroom, you need to pay attention to students' comfort by adjusting the brightness of lighting according to whether it is on the window or the corridor side. The teacher controls the panel lighting. All lighting switches off when the room is unoccupied.



BUS/KNX - IP gateway

Cat.No	Qty
0 035 45	1

> page 35





BUS/KNX power supply

Cat.No	Qty
0 035 07	1 for KNX line

> page 35

BUS/KNX

■ Common solution for several areas

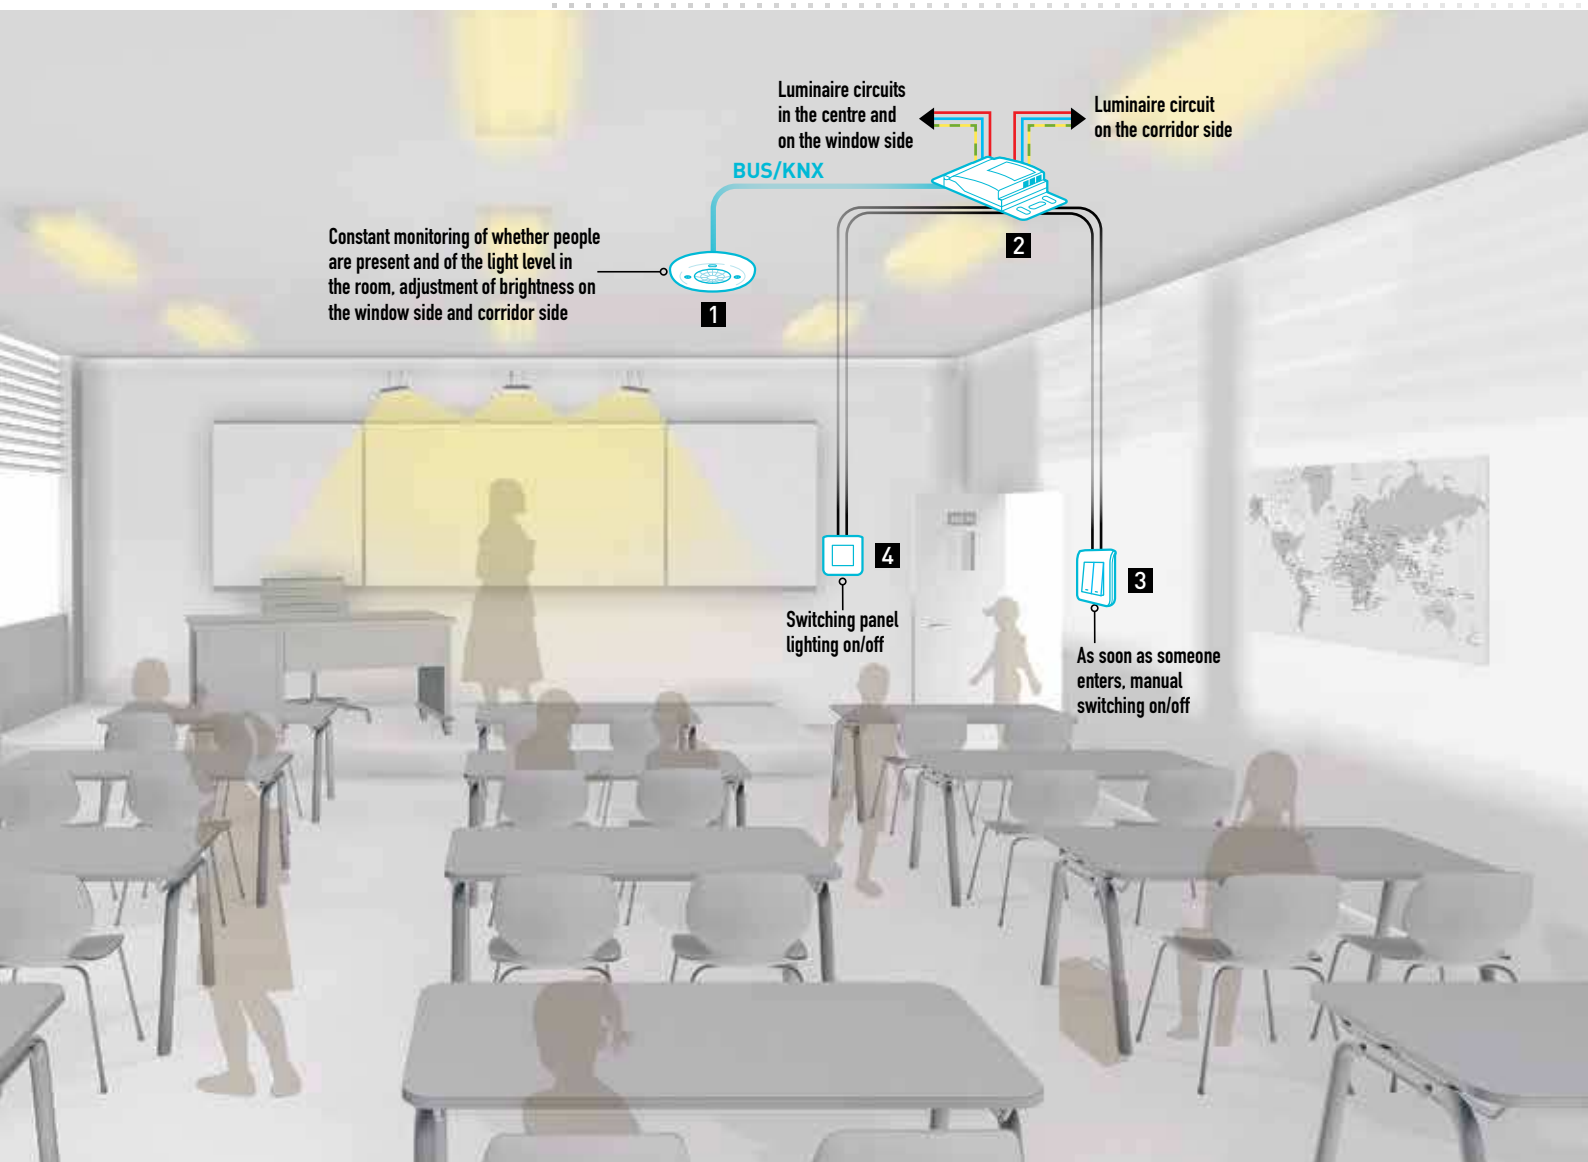

Cat.No	Qty
0 489 18	1 every 6 m

> page 33



Cat.No	Qty
0 488 88	1 for 4 circuits

> page 34



Cat.No	Qty
5 742 03	1 per door

> page 30




Cat.No	Qty
5 742 03	1 per panel


> page 30



0 675 71 (Mahogany)








0 675 72



5 735 05

Connected directly to BUS/KNX cable (supplied with tap-off connector)
The control unit must be programmed using ETS software

Pack	Cat.Nos	Arteor wired control units
		Used to control lighting (ON/OFF, dimming, scenario, forcing), roller shutters (raise, lower, stop), awnings, and other receivers Fitted with programmable RGB LEDs (12 colours available) for displaying load status and system status feedback (normal, forced, override, day/night pilot light, etc.), alarms To be fitted with Arteor plates and Batibox support frames
1	0 675 71	4 channels control unit without label display 4 actuation points To be equipped with key covers for control mechanism 
1	5 742 03	Square version 4 actuation points - With label holder ○ White
1	5 744 04	● Magnesium 
1	5 735 02	Round version 4 actuation points - With label holder ○ White
1	5 735 03	● Magnesium 
		4-buttons touch control units Supplied complete with white or black touch plates To be fitted with Batibox support frames
1	5 735 04	○ White - for BS flush-mounting boxes
1	5 735 05	● Black - for BS flush-mounting boxes 
		6-buttons touch control units Supplied complete with white or black touch plates
1	5 735 12	○ White
1	5 735 13	● Black 

Living Now

BUS/KNX manual control units



HD4657M3KNX



HS4657M3KNX



K4651M2KNX



K4651M3KNX

Connected directly to BUS/KNX cable (supplied with tap-off connector)
The control unit must be programmed using ETS software

Pack	Cat.Nos	6-buttons touch control unit
1	HC4657M3KNX	Supplied with fitted touch plate Requires Axolute support frame ○ White ● Black ○ Transparent glass
1	HS4657M3KNX	
1	HD4657M3KNX	



Pack	Cat.Nos	Living Now wired control units
1	K4651M2KNX	Used to control (ON/OFF, dimming, scenario, forcing), roller shutters (up, down, stop), awnings, and other receivers. Fitted with programmable RGB LEDs (12 colors available) for displaying load status and system status feedback (normal, forced, override, day/night pilot light, etc.) and alarms 2 channels control unit - 4 buttons To be fitted with Living Now cover plate, plate and support frame
1	K4651M3KNX	3 channels control unit - 6 buttons To be fitted with Living Now cover plate, plate and support frame



Thermoregulation

BUS/KNX



0 674 64



0 490 41

Connected directly to BUS/KNX cable (supplied with tap-off connector)
The control unit must be programmed using ETS software

Pack	Cat.Nos	Temperature control panel
		<p>Flush mounted 1.6" backlight display with 4 push-buttons and embedded a temperature probe Used to manage different types of heating/cooling system (FCU, heating/cooling valve, fan, electric load, ...) in combination through KNX with dedicated HVAC controller (Cat.Nos 0 026 97 or 0 490 41)</p> <ul style="list-style-type: none"> - Monitoring the ambient temperature with desired unit - Adjustment of the temperature set-point and/or fan speed - Selection of operating mode (comfort, eco, protection, OFF) <p>To be installed in flush-mounting boxes 2 modules</p>
1	0 674 64	Arteor
1		Axolute
1		Livinglight
1		Valena Life
1		<p>DIN FCU controller ON/OFF</p> <p>Actuator with internal thermoregulation to control FCU or thermal valves In combination with the temperature control panel, can be used to manage ambient temperature according to end-user requests: operating mode, temperature adjustment</p> <ul style="list-style-type: none"> - 2 folds valve ON/OFF control (2 A - 75~256 VAC) - 1 fold fan control – 3 speeds (6 A - 230 VAC) - 1 binary input check – window contact (9~265 VAC/DC) - Operating temperature -5 to 45°C - Operating voltage 230 VAC +/- 10% (50/60 Hz) <p>4 DIN modules 17.5 mm</p>
1	0 490 41	<p>DIN FCU controller 0-10 V</p> <p>Actuator with internal thermoregulation to control FCU, fan, thermal valves, electric load In combination with the temperature control panel, can be used to manage ambient temperature according to end-user requests: operating mode, temperature adjustment</p> <ul style="list-style-type: none"> - 2 outputs 0-10 VDC to control thermal valves (5 mA) - 5 outputs (relays) to control fan (3 speeds) and/or thermal valves (10 A - 230 VAC) - Operating temperature -5 to 45°C - Operating voltage supplied by the KNX bus <p>4 DIN modules 17.5 mm Possibility to power the 0-10 V valves in using the transformer 24 VAC Cat.No 4 130 95</p>

Sensors

BUS/KNX



0 489 19



0 489 21



0 784 93

Exists in
Céliane version



0 489 18

Constantly check for presence and light levels, switching OFF as soon as the natural light level is sufficient.

Switch ON and OFF automatically

Accurate set-up on site with configuration device

Connected directly to BUS/KNX cable (supplied with tap-off connector)

The detector must be programmed using ETS software

Pack	Cat.Nos	Special corridor motion sensor
1	0 489 19	Ceiling mounted Double passive infrared detection 360°, lateral range 2 x 12 m IP 20 Consumption 0.2 W Recommended fixing height: 2.5 m Optimum distance between two sensors: 20 m Fits directly in suspended ceiling with springs (supplied) or is installed in a 50 mm deep Batibox Cat.No 0 893 58 Surface mounted on ceiling using accessory Cat.No 0 488 75
1	0 489 21	Special motion sensor for outdoor car parks and cellars Wall or ceiling mounted - surface mounting Passive infrared detection with 270° adjustable head, range 20 m IP 55 Consumption 0.5 W Recommended fixing height: 2.5 m Can be fixed in a corner with a special accessory Cat.No 0 489 72
1	5 740 37	Special motion sensors for small premises and bathrooms Wall mounted - flush or surface mounting Recommended fixing height: 1.2 m Consumption 0.2 W Optimum distance between two sensors: 6 m Arteor 180° passive infrared detection, range 8 m IP 41 - Céliane Arteor plate - a Batibox support frame
1	5 740 79	○ White ● Magnesium

Pack	Cat.Nos	Special motion sensor for small premises and bathrooms (continued)
1	0 489 18	Special presence sensors for work areas Suitable for meeting rooms, classrooms, open areas, etc. Ceiling mounted 360° passive infrared and ultrasound detection, range 8 m IP 20 Consumption 0.5 W Optimum distance between two sensors: 6 m Fixes directly in suspended ceiling with springs (supplied) or is installed in a 50 mm deep Batibox Surface mounted on ceiling using accessory Cat.Nos 0 488 75 Connection by KNX red/black connector
1	0 489 22	360° passive infrared detection with high density lens range 8 m IP 20 Consumption 0.5 W Optimum distance between two sensors: 6 m Fixes directly in suspended ceiling with springs (supplied) or is installed in a 50 mm deep Batibox Surface mounted on ceiling using accessory Cat.No 0 488 75 Connection by KNX red/black connector

Dual technology

Controllers

false ceiling and modular BUS/KNX



0 488 88



0 026 65



0 026 73



0 026 79

Connected with the BUS/KNX cable
Configuration using ETS programming software

Pack	Cat.Nos	False ceiling controllers for dimming
1	0 488 88	Each output can be controlled by a sensor and/or BUS/KNX control unit For DALI control 4 outputs 32 ballasts maximum per output
1	0 488 87	For 1-10V control 4 outputs 1000 VA maximum per output Also control 4 ON/OFF circuits
1	0 026 65	Modular controllers for dimming Each output can be controlled by a sensor and/or BUS/KNX control unit For DALI control 2 output DALI bus (64 DALI ballasts max) to control per channel and up to 16 DALI scenes
1	0 026 98	For DALI with Color Temp. Control 002891 - 1 output DALI bus(64 DALI ballasts max) to control individually up to 16 DALI groups and up to 64 DALI scenes. Supports Color Temperature Control of the ballasts.
1	0 026 68	002892 - 2 output DALI bus(128 DALI ballasts max) to control individually up to 32 DALI groups and up to 32 DALI scenes. Supports Color Temperature Control of the ballasts. For 1-10V control 10 outputs 1-10 V also controlling 10 ON/OFF circuits (16 A max) 10 DIN modules
1	0 026 54	For LED and all others LV and ELV loads 2 outputs 2 x 300 W/VA maximum per output 4 DIN modules
1	0 026 86	For LV and ELV loads only 2 outputs 2 x 500 VA maximum per output
1	0 026 87	8 DIN modules 4 outputs 4 x 500 VA maximum per output 12 DIN modules

Pack	Cat.Nos	Modular multi-applications ON/OFF controllers
1	0 026 72	Each output can be controlled by a sensor and/or BUS/KNX control unit Multi-applications controllers with independent input channels and outputs configurable to control lighting loads, power sockets, roller shutters, and HVAC equipment 8 x 16 A outputs 6 DIN modules
1	0 026 73	8 x 16 A outputs - 8 inputs 6 DIN modules
1	0 026 74	12 x 16 A outputs 6 DIN modules
1	0 026 76	16 x 16 A outputs 10 DIN modules
1	0 026 78	20 x 16 A outputs 10 DIN modules
1	0 026 79	20 x 16 A outputs - 18 inputs 10 DIN modules
1	0 484 18	Room Controller Unit Power modules equipped with output contacts for controlling: - different types of ON/OFF load (lighting, roller shutters, contactors, motors, etc.) - a DALI dimming output for 64 ballasts max. Loads are managed by the controls to which they are linked: either by BUS/KNX controls, or by wired connection input terminals (switches, push-buttons, volt-free contacts) Multiphase connection and consumption measurement
1	0 484 22	8 inputs - 10 outputs 8 DIN modules 16 inputs - 16 outputs 12 DIN modules

Infrastructure products

BUS/KNX



0 026 93



0 026 92



0 035 45



0 035 07

Connected with the BUS/KNX cable
Configuration using ETS programming software

Pack	Cat.Nos	BUS/KNX interface - voltage contact
1	0 026 93	Modular Connects voltage free contacts devices (switches, push-buttons, alarms, etc.) to the BUS/KNX 4 inputs 0 to 265 AC/DC powered 2 DIN modules
1	0 026 92	Flush mounting For installation in a flush-mounting box 4 inputs - 4 outputs
1	0 035 46	Line coupler Provides galvanic isolation between lines Necessary in an installation where there are more than 64 KNX participants 2 DIN modules
1	0 035 45	IP/KNX router Can acts as main line or backbone coupler Links different KNX networks to each other via the IP infrastructure 2 DIN modules

Pack	Cat.Nos	Modular power supplies
1	0 035 06	Powers one BUS/KNX line Integrated filter to prevent the short-circuit of BUS messages Voltage 230 V~ - 30 V= With additional 30 V unfiltered output 7 DIN modules 320 mA
1	0 035 07	640 mA
1	0 488 79	BUS/KNX connector Black and red Supplied in boxes of 50
1	0 492 91	BUS/KNX cables Length 500 m 0.8 mm dia. quad Isolation 4000 V 1 pair: red/black
1	0 492 92	2 pairs: red/black and yellow/white

Controllers

BUS/KNX load tables

Load table at 230 V a.c. 50-60Hz
















Cat.Nos	Outputs	Halogen lamp	ELV halogen lamp with ferromagnetic or electronic transformer	Fluorescent tube	LED and compact fluorescent lamp	Fluorescent lamp with 1-10 V ballast	DALI	Motors
False ceiling controllers								
0 488 88	4	-	-	-	-	-	4 x 32 ballasts	-
0 488 87	4	4 x 800 W	4 x 800 VA	4 x 1000 VA	4 x 1000 VA	4 x 1000 VA	-	-
0 026 65	1	-	-	-	-	-	64 ballasts (group control only)	-
0 026 99	1	-	-	-	-	-	64 ballasts (individual control)	-
0 026 68	10	-	-	-	-	4000 VA	-	-
0 026 54	2	2 x 300 W	2 x 200 VA	2 x 300 VA	2 x 75 W	-	-	-
0 026 86	2	2 x 500 W	2 x 500 W	-	-	-	-	-
0 026 87	4	2 x 500 W	4 x 500 W	-	-	-	-	-
0 026 80	4	2 x 3680 W	4 x 1000 VA	4 x [10 x (2 x 36 W)]	4 x 500 VA	-	-	4 x 500 VA
0 026 72	8	8 x 4000 VA	8 x 1800 VA	8 x 2400 VA	8 x 400 VA	-	-	8 x 1000 VA
0 026 73	8	8 x 4000 VA	8 x 1800 VA	8 x 2400 VA	8 x 400 VA	-	-	8 x 1000 VA
0 026 74	12	12 x 4000 VA	12 x 1800 VA	12 x 2400 VA	12 x 400 VA	-	-	12 x 1000 VA
0 026 76	16	16 x 4000 VA	16 x 1800 VA	16 x 2400 VA	16 x 400 VA	-	-	16 x 1000 VA
0 026 78	20	20 x 4000 VA	20 x 1800 VA	20 x 2400 VA	20 x 400 VA	-	-	20 x 1000 VA
0 026 79	20	20 x 4000 VA	20 x 1800 VA	20 x 2400 VA	20 x 400 VA	-	-	20 x 1000 VA
0 484 18	4	4 x 500 W	4 x 250 VA	4 x [2 x (2 x 36 W)]	4 x 80 VA	-	1 x 64 ballasts	4 x 250 VA
	4	4 x 1000 W	4 x 500 VA	4 x [4 x (2 x 36 W)]	4 x 160 VA			4 x 500 VA
	2	2 x 3680 W	2 x 1000 VA	2 x [10 x (2 x 36 W)]	2 x 500 VA			2 x 500 VA
0 484 22	4	4 x 500 W	4 x 250 VA	4 x [2 x (2 x 36 W)]	4 x 80 VA	-	1 x 64 ballasts	4 x 250 VA
	8	8 x 1000 W	8 x 500 VA	8 x [4 x (2 x 36 W)]	8 x 160 VA			8 x 500 VA
	4	4 x 3680 W	4 x 1000 VA	4 x [10 x (2 x 36 W)]	4 x 500 VA			4 x 500 VA

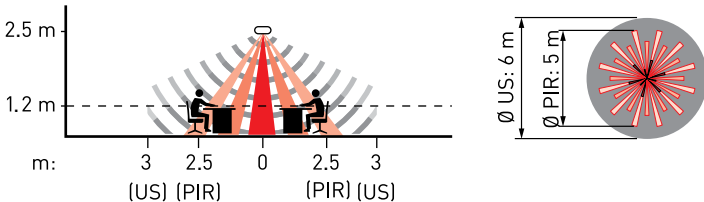
*: Compatible with dimmable LED and compact fluorescent lamps

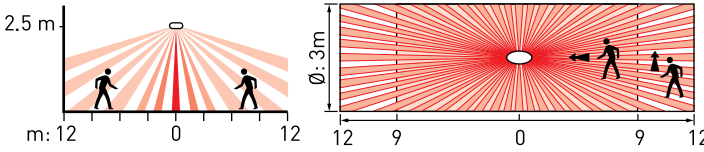- ON/OFF
- Dimming
- Automation

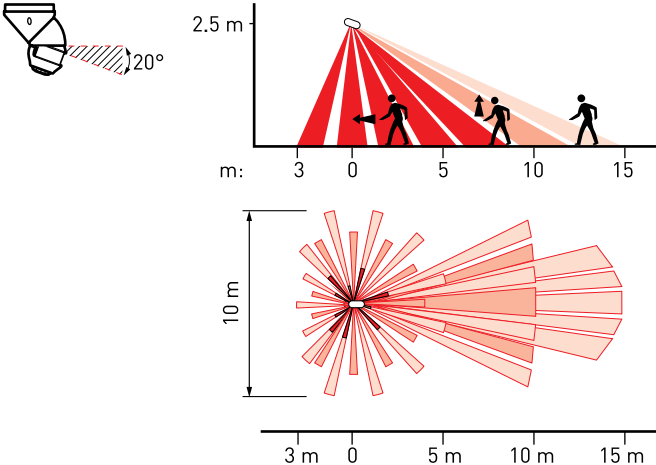Sensors

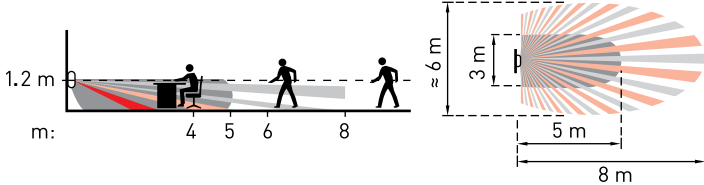BUS/KNX coverage patterns

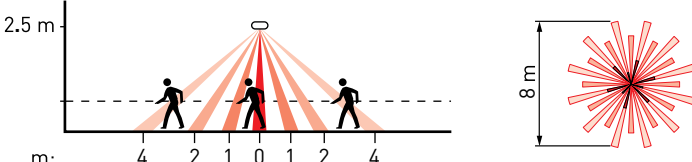Cat. Nos	Installation technology type	Range	Detection area	Examples of applications
 0 489 18		6 m (US) 5 m (PIR)		Classroom, meeting room, open plan office
 0 489 19		2 x 12 m		Long corridor
 0 489 21		18 m		High ceiling areas (warehouses, gymnasium) outdoor car park, basement, laboratory
 5 740 37 5 740 79 -HC4658KNX HD4658KNX - HS4658KNX L4658KNX - N4658KNX NT4658KNX		8 m		Bathroom, stairways
 0 489 22		8 m		Individual office, corridor, stairways, restrooms etc.

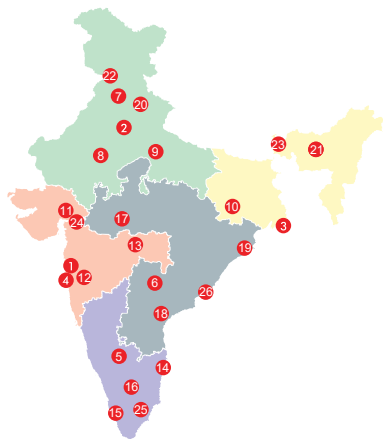

Head offices

1. 61 & 62, 6th Floor,
Kalpataru Square, Kondivita Road,
Off Andheri-Kurla Road, Andheri (E),
MUMBAI – 400 059.
Tel.: (022) 3041 6200
Fax : (022) 3041 6201
Website : www.legrand.co.in

Regional sales offices

2. B-225, 4th Floor, Okhla Industrial
Area, Phase -1,
NEW DELHI – 110020.
Tel.: (011) 3990 2200, 2699 0046,
(011) 2699 0028 / 29 / 30 / 31
Fax : (011) 2699 0047
3. Bhakta Towers, 2nd & 3rd Floor,
Plot No. KB 22, Sector-III, Saltlake,
KOLKATA – 700 098.
Tel.: (033) 4021 3535
4. C/203, Corporate Avenue, Atul Projects,
Near Mirador Hotel, Chakala,
Andheri - Ghatkopar Link Road,
Andheri - (E), **MUMBAI** – 400 099.
Tel.: (022) 6230 1000
5. Ferozes Manor, Situated at 58
Hospital Road, Shivaji Nagar,
BANGALORE – 560 001.
Tel.: (080) 80682 20000
6. Prestige Phoenix, 1st Floor,
Next to Lifestyle Building,
Begumpet, Hyderabad,
TELANGANA – 500 016
7. Unit No. 203, Tower B Bestech
Business Towers, Sector-66, Mohali,
CHANDIGARH – 160 017.
Tel.: (0172) 5019 008
8. Building No-128, Mansarovar Link Road,
Gopalpura Bypass, Mohan Nagar,
Near Ridhi Sidhi Flyover, **JAIPUR** – 302018
Tel.: 0141-2208665
9. 209-A, 2nd Floor, Cyber Heights,
Opp. Indira Gandhi Pratishthan,
Vibhuti Khand, Gomti Nagar,
LUCKNOW – 226 010.
Tel.: (0522) 431 9316
10. 202 & 203, Sunrise, Forum 100,
Burdwan Compound, Lalpur,
RANCHI – 834 001.
Tel.: (651) 660 5400
11. A 101-102, Mondeal Heights,
Besides Novotel Hotel, Sarkhej
Gandhinagar Highway (S G Highway),
AHMEDABAD – 380 015.
Tel.: (079) 6134 0555
12. 8th Floor, Pinnacle Park Avenue,
Opp. Law College, Law College Road
Next To German Bakery,
Shivaji Nagar, **PUNE** – 411004.
Tel.: (020) 6729 5601 / 600
13. Plot No.95, 2nd Floor, Shreyash
Heights, VIP Road, Ramdaspeth,
NAGPUR – 440 010.
Tel.: (0712) 2440 900
14. 10 B, Prestige Center Court, Office Block,
Vijaya Forum Mall, #183, N.S.K. Salai,
Vadapalani, **CHENNAI** – 600 026.
Tel.: (044) 6612 2800
15. J. B. Manjooran Estate,
Door No. 50/1107 A9, 3rd Floor,
Bye Pass Junction, Edappally,
COCHIN – 682 024.
Tel.: (0484) 6604 700
16. 204-205, Megapolis Square,
579, M G Road,
INDORE – 452 001.
Tel.: (0731) 4999 891
17. MF-2, Datta's Lords House,
Jammi Chettu Street, Mogalrajapuram,
VIJAYAWADA – 520 010.
Tel.: (0866) 248 2393/6393
18. Plot No. 359, Saheed Nagar,
2nd Floor,
BHUBANESWAR – 751 007.
Tel.: (0674) 254 0623
19. Unit - 1 & 2, Vijay Park,
Main Chakrata Road,
DEHRADUN - 248 001.
Uttarakhand.
Tel.: (0135) 661 6100
20. House No. 97, Ground Floor,
Rajgarh Main Road,
Opp. City Heart Nursing Home,
GUWAHATI – 781 007.

Area offices

21. Cabin No. 9, 2nd Floor,
Madhok Trade Centre,
Madhok Complex, Ferozpur Road,
LUDHIANA – 141 001.
Tel.: (0161) 277 0301
22. 94, Udhm Singh Sarani,
Ground Floor, Ashrampara,
SILIGURI – 734 001.
Tel.: (353) 264 1067
23. A-207, Universal Business
Center, Near Madhuvan Circle,
L.P. Savani Road, Adajan,
SURAT – 395 009.
Tel.: (0261) 263 3861
24. Aparna Towers, 1st Floor, 2/3,
Bypass Road,
MADURAI – 625 010.
Telefax : (0452) 230 8414
25. 43-9-205, 3rd Floor, Plot No. 10,
Subbalakshmi Nagar,
Opp. More Super Market,
VISAKHAPATNAM – 530 016.
Tel.: (0891) 273 5652 / 2739363
26. B-5, 1st Floor, Thirumalai Towers,
723, Avanashi Road,
COIMBATORE – 641 018.
Tel.: (0422) 668 3200
27. 515 & 516, Gera Imperium Grand,
Patto centre ,
Panaji **GOA** – 403 001
28. 1st Floor, Cordial Bharathi,
Nanthancodu, Thiruvanthapuram,
KERALA - 695 003

Technical assistance from Legrand

Telephonic technical assistance for selection of products, technical information, guidance, wiring diagrams and estimation is now made available to you at each Regional Office. Contact the Technical Officer of Legrand at the following telephone numbers

New Delhi : Tel.: (011) 2699 0028, 3990 2200
Kolkata : Tel.: (033) 4021 3535 / 36
Mumbai : Tel.: (022) 6230 1000
Chennai : Tel.: (044) 6612 2800
Hyderabad : Tel.: (040) 4567 1717

For other places, contact the nearest
Regional / Branch / Area offices

customer.care@legrand.co.in



LIVE THE ADVANTAGE