



# Myrius™

INSPIRED TO BE MORE



 **legrand®**

LIVE THE ADVANTAGE





## with you at **THE HEART**

At Legrand when we dream up something new, guess who drives us to dream bigger? When our engineers do umpteen extra-trials, wonder who do they do it for? When our craftsmen happily work overtime, who secretly motivates them?

Every piece of technology, every byte of data and every stroke of design is created by us, with you at the heart.

The state-of-the-art Myrius NextGen range has been inspired by the lives you lead. Inspired by what the little ones love most or what grandpas and grannies adore. Inspired by what husbands and wives love or sometimes even fight over.

When such inspirations meet Legrand's famed 'Designengineering' philosophy, what you get is the stunning Myrius NextGen range.



**INSPIRED BY  
HUES & PATTERNS**




We know just how much India loves its colours and motifs. Crafted by the latest In Mold Decoration (IMD) technology, our CE Certified plates come in myriad colours and unique patterned finishes. With unmatched consistency in quality and the finish of patterns, these modern, sleek and flat designs will add a touch of designer class to any room. So, be it an understated pattern or a bold, colourful look that becomes a showstopper - take your pick from 10 different finishes and live the advantage.







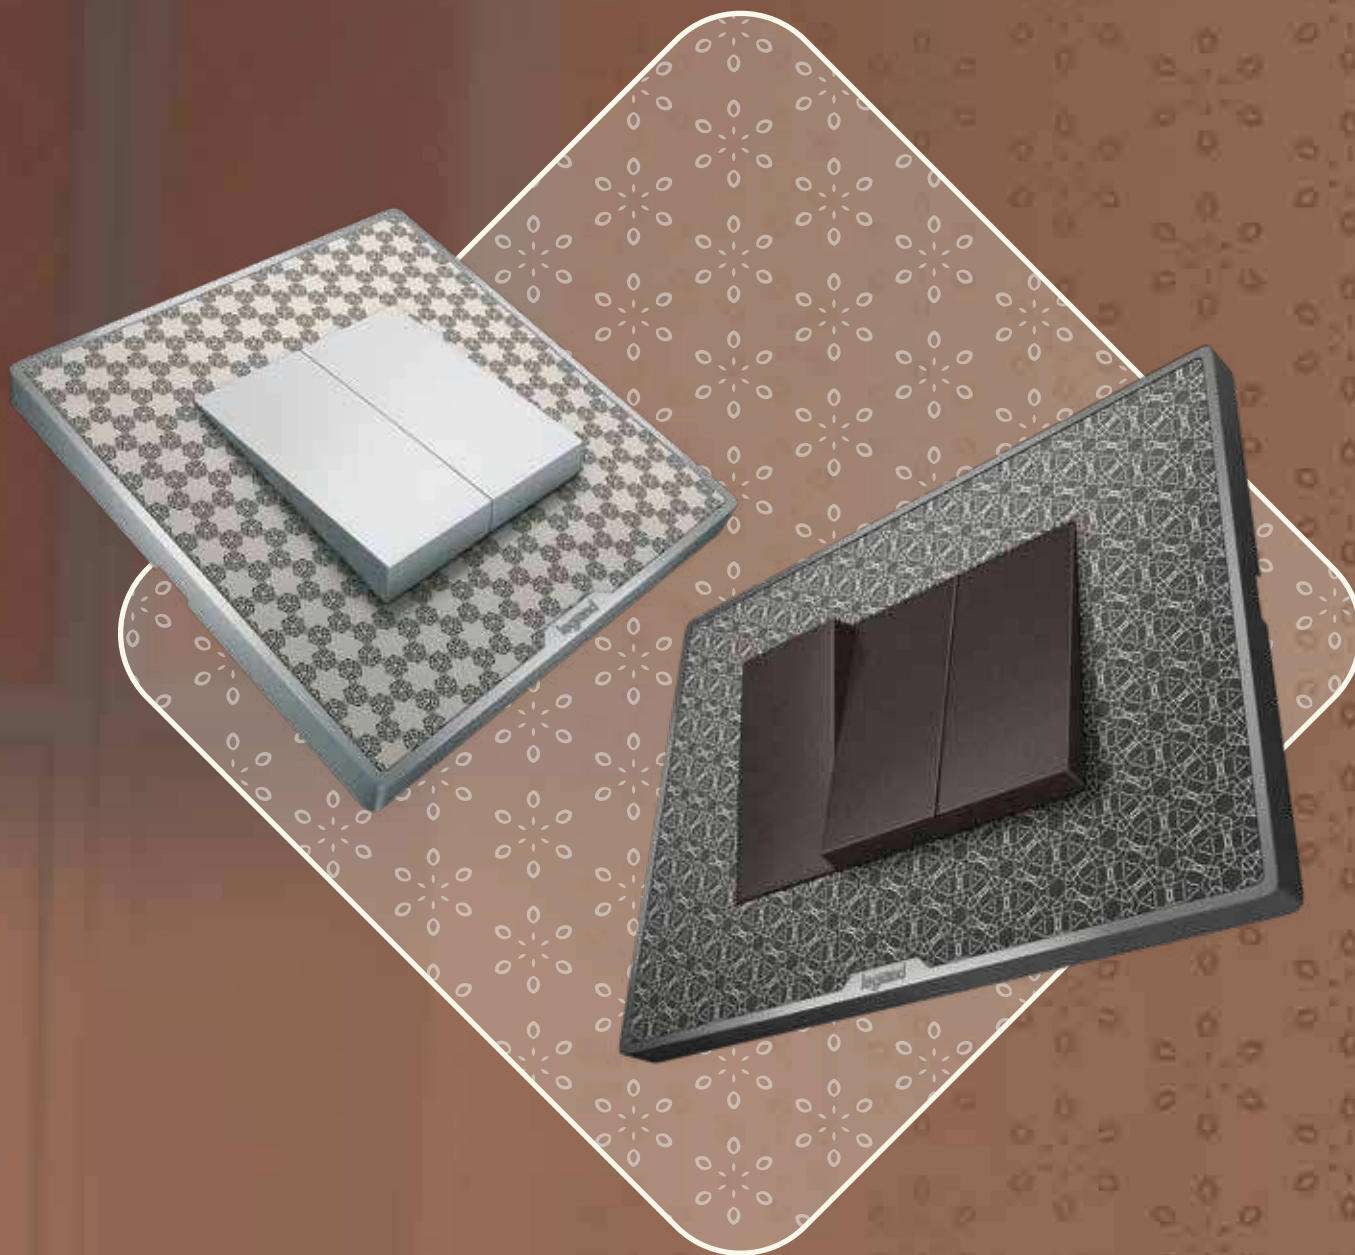

# INSPIRED BY YOUR HEALTH-FIRST MANTRA

You prioritize your family's health, hygiene and wellness more than anything else. Inspired, we've created anti-bacterial plates infused with silver ions, which do not let bacteria grow on the surface of switches and plates and accessories throughout its lifespan. One less reason to worry about germs being passed on at home. Live the advantage of a healthy home.







# CHARGING SOLUTIONS







# INSPIRED BY YOUR ALWAYS-ON LIFESTYLE

Different users have different requirements. Thankfully our range of Type A and Type C charging solutions ensures that whatever be your type, you'll never run out of charge! And we've been the first to introduce and follow IS standard and the mandatory CRS declaration as per BIS norms. So, live the advantage of so many options





**INSPIRED BY YOUR  
CLUTTER-FREE LIFE**




Induction charger\*

We all love a life devoid of clutter. A minimal, yet beautiful existence. Just like our induction charger. Forget using messy charging wires for your phone. Simply place it in the induction charger's slot or plug in with USB Port and voila – in no time at all, you have a fully charged phone, without the mess of untangling wires! Live the advantage of a tangle-free life.

\*Only charges compatible phones with induction receiver technology



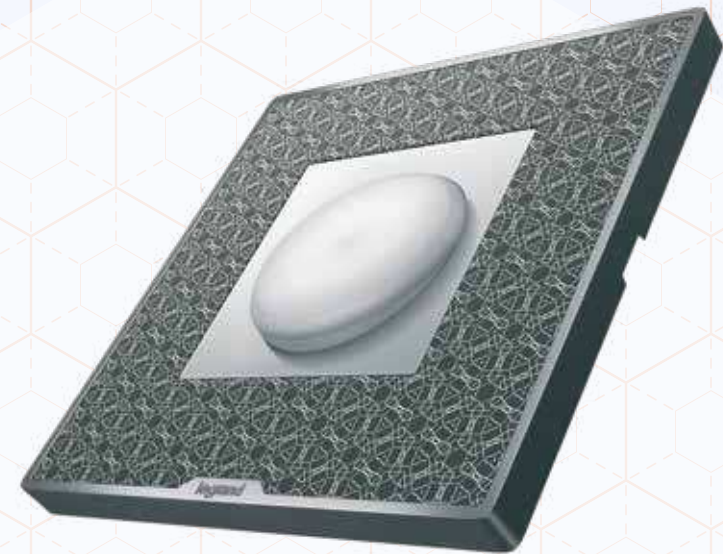

**SMART  
CONVENIENCE**





Bluetooth Sound receiver  
and Ceiling Speaker

# INSPIRED BY THE SECRET PERFORMER IN YOU

Be it crooning alongside your favourite numbers or just jumping up on the bed and dancing to it like no one's watching – we know everyone secretly wants to do these. Our Bluetooth sound receiver and ceiling speaker helps you unlock the performer in you. Thanks to crystal clear audio that turns any room into a concert venue. Live the advantage of enjoying your musical side.





# INSPIRED BY YOUR LOVE FOR A GREAT STORY

We know how much you love your page-turners and even a quiet nap in between chapters. Which is why our Modular, Flexible and Dimmable Reading lamp is just perfect. Bright when you are lost in the story and easily dimmed when you want a bit of shuteye. Live the advantage of convenience with an ultra-modern design.



# INSPIRED BY YOUR ALWAYS-READY MANTRA OF LIVING

Be prepared – it's one of your favourite philosophies in life, isn't it? We anticipated it. Just as we anticipate any sudden emergency, power cuts or an impromptu adventure into the dark outdoors. Our removable emergency LED lamp is just the right thing you need to show you the way, when all other light fails. Live the advantage of ease.






# INSPIRED BY A TOUCH OF YOU

Touch switches in a unique Titane finish. Tested individually for several thousand operations. The promise of long life and low power consumption. High gloss finishing that facilitates easy cleaning. And in-built memory feature for electronic touch switches. When it comes to our touch switches we've kept in mind your needs and touched upon all of them! So, go ahead and live the advantage.



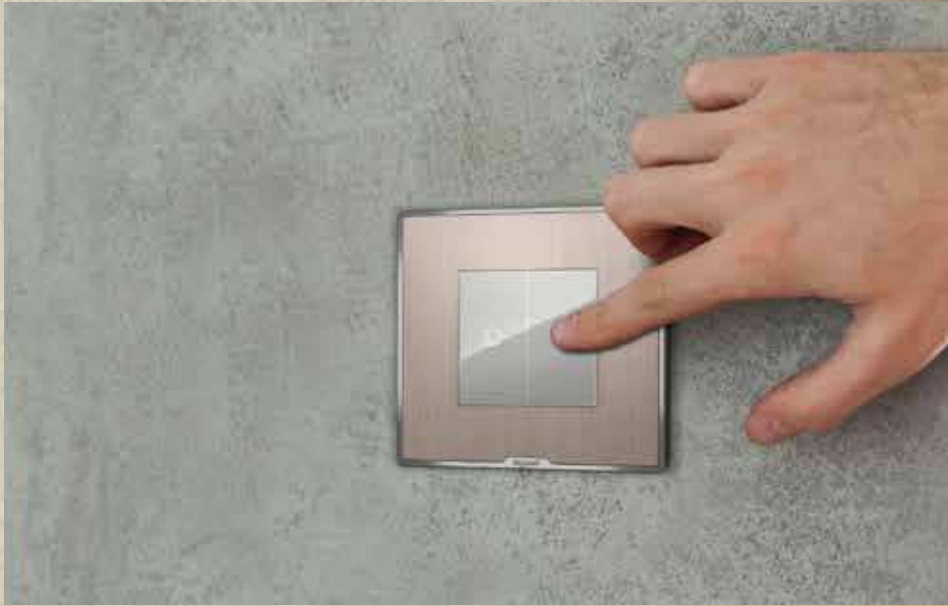

# INSPIRED BY YOUR NEED TO STANDOUT

Our Touch Switches bring the ease of convenience and the looks of outstanding design. Modern, sleek, minimal, we are inspired by your global tastes, to make your home as aesthetic as it gets.

# Myrius™

## Switches - Classic White



Switches are ISI marked as per the latest IS 3854:1997  
First time in India- Unique Indicator design

| Pack   | Cat.Nos  | Switches 6A 230V AC                       |
|--------|----------|-------------------------------------------|
| 20/200 | 6 792 00 | 6A Switch 1 way 1M White                  |
| 20/200 | 6 792 01 | 6A Switch 2 way 1M White                  |
| 20/200 | 6 792 02 | 6A Switch 1 way 1M with indicator White   |
| 20/200 | 6 792 03 | 6A Switch 1 way 1M Light marking White    |
| 20/200 | 6 792 04 | 6A Switch 1 way 1M with Fan marking White |

| Pack   | Cat.Nos  | Switches 10A 230V AC                     |
|--------|----------|------------------------------------------|
| 10/100 | 6 792 05 | 10A Switch 1 way 2M White                |
| 10/100 | 6 792 06 | 10A Switch 2 way 2M White                |
| 10/100 | 6 792 07 | 10A Intermediate Switch 2M White         |
| 10/100 | 6 792 08 | 10A Switch 1 way 2M with Indicator White |

| Pack   | Cat.Nos  | Switches 16A 230V AC                     |
|--------|----------|------------------------------------------|
| 20/200 | 6 792 09 | 16A Switch 1 way 1M White                |
| 20/200 | 6 792 10 | 16A Switch 2 way 1M White                |
| 20/200 | 6 792 11 | 16A Switch 1 way 1M with Indicator White |

No. of modules

1

1

1

1

1

2

2

2

2

1

1

1

# Myrius™



| Pack   | Cat.Nos  | Switches 20A 230V AC                        |
|--------|----------|---------------------------------------------|
| 20/200 | 6 792 12 | 20A Switch 1 way 1M White                   |
| 10/100 | 6 792 13 | 20A DP Switch 1 way 2M White                |
| 10/100 | 6 792 14 | 20A DP Switch 1 way 2M with Indicator White |
| 10/100 | 6 792 15 | 20A Switch 2 way 2M White                   |

| Pack   | Cat.Nos  | Switches 25A 230V AC                 |
|--------|----------|--------------------------------------|
| 20/200 | 6 792 16 | 25A SP 1 way with Indicator 1M White |

| Pack   | Cat.Nos  | Switches 32A 230V AC                  |
|--------|----------|---------------------------------------|
| 10/100 | 6 792 17 | 32A DP Switch 2M with Indicator White |

No. of Modules

1

2

2

2

1

2

Our switches are compliant with revised BIS standard (IS 3854:2023) requirements. Also, our switches are covered additionally for use on Self-Ballasted Lamp (SBL) loads.

### SBL power rating as per IS3854:2023

| Switch Rating    | 6A, 230V~ | 10A, 230V~ | 16A, 230V~ | 20A, 230V~ |
|------------------|-----------|------------|------------|------------|
| SBL power (Watt) | 100 W     | 100 W      | 200 W      | 250 W      |

Myrius™

Push Buttons



6 792 20

6 792 21

6 792 22



6 792 23



6 792 24

| Pack   | Cat.Nos  | Push Button 6A 230V AC |                                                 |
|--------|----------|------------------------|-------------------------------------------------|
| 20/200 | 6 792 18 |                        | 6A Push Button SP 1M White                      |
| 20/200 | 6 792 19 |                        | 6A Push Button SP 1 way 1M with Indicator White |
| 20/200 | 6 792 20 |                        | 6A Bell Push 1 way 1M White                     |
| 20/200 | 6 792 21 |                        | 6A Bell Push 1 way 1M with Indicator White      |
| 10/100 | 6 792 22 |                        | 6A Bell Push 1 way 2M White                     |
| 10/100 | 6 792 23 |                        | 6A Bell Push 1 way 2M with Indicator White      |

| Pack | Cat.Nos  | Accessories for switches |                            |
|------|----------|--------------------------|----------------------------|
| 5/50 | 6 792 24 |                          | Lamp for Switches 230 V AC |

Myrius™

Sockets



6 792 25

6 792 26

6 792 27



6 792 28

| Pack   | Cat.Nos  | Sockets 240V AC                                                                                                                   |                                                                                 | No. of Modules |
|--------|----------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|----------------|
|        |          | Conforming to IS 1293 : 2019<br>Shuttered for Child Safety<br>Shutter opens only with phase and neutral insertion simultaneously. |                                                                                 |                |
| 20/200 | 6 792 25 |                                                                                                                                   | 6/16A 2 Pin Euro-US Socket 1 Module                                             | 1              |
| 5/50   | 6 792 26 |                                                                                                                                   | 16 A 3 Pin Switched Socket 3M                                                   | 3              |
| 10/100 | 6 792 27 |                                                                                                                                   | Multistandard Socket, 2/3 Pin - 6/10/13A 250V AC 2 Pin - 15A for 127V, 2 Module | 2              |
| 20/200 | 6 792 28 |                                                                                                                                   | 6A 5 Pin Universal Socket 2M White                                              | 2              |
| 5/50   | 6 792 29 |                                                                                                                                   | 6/16A Socket 3M White                                                           | 3              |
| 10/100 | 6 792 30 |                                                                                                                                   | 6/16A Socket 2M White                                                           | 2              |

# Myrius™

## Dimmers, Fan Regulators, Emergency Light, Skirting Light and Indicators



| Pack     | Cat.Nos  | Dimmers and Fan regulators                                                                                                                                                           | No. of modules |
|----------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
|          |          | Fan regulators with ISI mark<br>Fan regulators with ease of speed selection<br>Fan regulator models available to suite all Ceiling Fans<br>High capacity sturdy design Light Dimmers |                |
| 5/50     | 6 792 36 | Rotary Dimmer 400W 1M White                                                                                                                                                          | 1              |
| 10/100   | 6 792 37 | Rotary Light Dimmer 500W 2M White                                                                                                                                                    | 2              |
| 5/50     | 6 792 39 | Fan Regulator 100W 1M White                                                                                                                                                          | 1              |
| 10/100   | 6 792 40 | Fan Regulator 100W 360 Degree 2M White                                                                                                                                               | 2              |
| 10/100   | 6 792 41 | Fan Regulator 120W 360 Degree 2M White                                                                                                                                               | 2              |
| 1/10/100 | 6 792 42 | Fan Regulator 70W 2M White                                                                                                                                                           | 2              |
|          |          | <b>Emergency Light</b>                                                                                                                                                               |                |
|          |          | Unique portable torch design with battery backup<br>White Light for better visibility                                                                                                |                |
| 1/10/100 | 6 792 43 | Removable LED lamp 2M White                                                                                                                                                          | 2              |
|          |          | <b>Skirting Light</b>                                                                                                                                                                |                |
| 5/25     | 6 792 48 | Skirting Light with warm White LED 3M White                                                                                                                                          | 3              |
|          |          | <b>Indicator</b>                                                                                                                                                                     |                |
| 1/10/100 | 6 792 87 | Indicator unit 1M with transparent LED with colored labels White                                                                                                                     | 1              |

# Myrius™

## Bell Call Indicator, Buzzer, Infrared Sensors and Remote unit



| Pack   | Cat.Nos  | Bell Call Indicator                                                                          | No. of Modules |
|--------|----------|----------------------------------------------------------------------------------------------|----------------|
| 20/200 | 6 792 49 | Bell Call Indicator 1M White                                                                 | 1              |
|        |          | <b>Buzzer</b>                                                                                |                |
| 20/200 | 6 792 50 | Buzzer 230V 1M White                                                                         | 1              |
|        |          | <b>Infrared sensors</b>                                                                      |                |
|        |          | High sensitive design with sensitivity and time adjustment<br>Suitable for all type of loads |                |
| 1/50   | 6 792 51 | Infrared sensor Switch 400W 2M White                                                         | 2              |
|        |          | <b>Remote unit</b>                                                                           |                |
|        |          | Sleek, high quality, modular 4 switch remote unit<br>Suitable for all type of loads          |                |
| 1/5/20 | 6 792 52 | Remote control unit for Light and fan 4M White                                               | 4              |
| 1/5/30 | 6 793 03 | Remote control hand unit                                                                     | -              |

# Myrius™

## Hospitality function



| Pack   | Cat.Nos  | Hotel Keycard Switch                                                                         |
|--------|----------|----------------------------------------------------------------------------------------------|
| 1/10   | 6 792 53 | 16 A Key card switch Suitable for all type of loads<br>Isolated contacts for switch function |
| 10/100 | 6 792 55 | 16A Hotel Key FOB Switch 2M White<br>Credit card size Key FOB                                |
| 10/100 | 6 792 56 | DND & CMR Indicator 1M + 1M<br>Bell Push White                                               |
| 10/100 | 6 792 57 | DND & CMR (inside) White                                                                     |
| 1/16   | 6 792 58 | Shaver Socket 110/230V AC Monoblock with plate<br>2M White                                   |
| 1/5/20 | 6 792 59 | Shaver Socket 110/230V AC Monoblock with plate White 4M                                      |

No. of Modules  
2

2

2

2

2

4

# Myrius™

## Sockets and Connectors



| Pack   | Cat.Nos  | T.V Sockets                                   | No. of Modules |
|--------|----------|-----------------------------------------------|----------------|
| 20/200 | 6 792 60 | T.V co-axial Socket White                     | 1              |
| 20/200 | 6 792 62 | RJ11 Telephone White                          | 1              |
| 20/200 | 6 792 63 | Double RJ11 Telephone White                   | 1              |
| 20/200 | 6 792 64 | RJ 45 UTP CAT 5 tooless with shutter 1M White | 1              |
| 20/200 | 6 792 65 | RJ 45 UTP CAT 6 tooless with shutter 1M White | 1              |
| 10/100 | 6 792 66 | RJ 45 UTP CAT 6 tooless with shutter 2M White | 2              |
| 1/10   | 6 792 67 | Preterminated AV connector 1M White           | 1              |

## Audio-Video Connectors

Used to transmit high-definition digital/analog audio/video streams between a source (Blu-ray player, computer) and a compatible receiver (TV, LCD video projector...)

# Myrius™

## Connectors, Sound, Motor starter, Electronic Function



| Pack     | Cat.Nos  | Audio-Video Connectors                     |
|----------|----------|--------------------------------------------|
| 1/10     | 6 792 68 | Preterminated projector connector 1M White |
| 1/10     | 6 792 69 | Preterminated HDMI Socket 1M White         |
| 1/10/100 | 6 792 70 | Volume Controller 2M                       |
| 1/10/100 | 6 792 71 | 16A Motor starter 2M White                 |
| 1/10/100 | 6 792 72 | 25A Motor starter 2M White                 |
| 1/5/50   | 6 792 88 | USB charger 1500 mA 1M type A White        |
| 1/10/100 | 6 792 89 | USB charger 3000 mA 2M type A & C White    |
| 1/5/50   | 6 792 90 | USB charger 1500 mA 1M type C White        |

# Myrius™

## Electronic function



| Pack   | Cat.Nos  | Combi (Socket+USB)                                                                                                                                                                                                                                                                                                                                                                                     |   |
|--------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| 1/5/50 | 6 792 92 | Combi twin USB 3100 mA Multistandard Socket type A                                                                                                                                                                                                                                                                                                                                                     | 3 |
| 1/5/50 | 6 792 93 | Combi twin USB 3100 mA Multistandard Socket type A & type C                                                                                                                                                                                                                                                                                                                                            | 3 |
| 1/5/50 | 6 792 94 | Combi twin USB 3100 mA Multistandard Socket type C                                                                                                                                                                                                                                                                                                                                                     | 3 |
| 1/4    | 6 792 95 | <b>Wireless Charger</b><br>Efficient charging tested as per international standard<br>Modular installation<br>Mobile holder present<br>Available USB for wire charging<br>Induction charger 1A wireless 2.4A USB + dock 2M<br>SUP with mech White<br>1A charger and one 2.4A USB port to power second device<br>*** charging only with wireless compatible phone having Induction receiver technology. | 2 |
| 1/6    | 6 792 98 | <b>Loud Speakers</b><br>Compact 6W RMS easy hooking intallation<br>86db (1W/1M) Sensitivity<br>Ideal for living room, kitchen, Bedroom, offices, canteen<br>Ceiling Loudspeaker 8 Ohms 100mm White                                                                                                                                                                                                     | - |

No. of Modules

1

1

2

2

2

1

2

1



| Pack     | Cat.Nos  | Sound Diffusion                                                                                                                                                                                                                                                                      |
|----------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1/10/100 | 6 792 99 | Bluetooth Technology. Voice messages for easy understanding<br>Compact 2M design with all control functions<br>Inbuilt amplifier, 1.5W X2 with 8 Ohms speaker<br>Ideal for living room, kitchen, Bedroom, offices, canteen<br>Greater than 8 m range<br>Bluetooth sound diffusion 2M |
| 1/10/120 | 6 793 04 | Rotary Dimmer Universal<br>First time in India-High quality universal dimmer<br>for all type of Light loads including LED loads<br>Comes in 1 Module<br>Rotary LED Light dimmer 1M - 50W White                                                                                       |
| 1/50     | 6 793 08 | Touch Switches<br>Range of touch switches<br>Tested for > 40000 switching operations at full load<br>Capacitive touch activation with big touch area<br>for ON THE GO switching<br>Touch Switch 2M 1 way 2 Switch 1000W                                                              |
| 1/50     | 6 793 09 | Touch Switch 2M 1 way 1440W                                                                                                                                                                                                                                                          |
| 1/50     | 6 793 10 | Touch Switch 2M 2 way 1000W                                                                                                                                                                                                                                                          |
| 1/50     | 6 793 13 | Touch Switch 2M 1 way 3000W                                                                                                                                                                                                                                                          |
| 1/50     | 6 793 06 | Touch Switch Bell Push 2M 1440W                                                                                                                                                                                                                                                      |

2

1

2

2

2

2

2



| Pack   | Cat.Nos  | Touch Regulator, Curtain & Dimmer                                                                                                                                                                    | No. of Modules |
|--------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| 1/50   | 6 793 07 | 5 step touch Fan regulator<br>Universal scroll type Light dimmer for all type of loads<br>Touch Switch - curtain controller 2M                                                                       | 2              |
| 1/50   | 6 793 05 | Touch Fan Regulator 2M 100W                                                                                                                                                                          | 2              |
| 1/50   | 6 793 15 | 300W universal LED touch scroll Dimmer 2M                                                                                                                                                            | 2              |
| 1/10   | 6 793 16 | Reading Light<br>Modular & Flexible handy Light with brightness adjustment<br>Ideal for bedside or table wall installation<br>Warm White light for comfortable reading<br>Reading Light LED 2M White | 2              |
| 20/200 | 6 792 75 | Cable outlet 8mm 1M White                                                                                                                                                                            | 1              |
| 40/400 | 6 792 76 | Blanking plate 1M White                                                                                                                                                                              | 1              |
| 10/100 | 6 792 77 | Blanking plate 2M White                                                                                                                                                                              | 2              |

# Myrius™

## Switches - Charcoal grey



Switches are ISI marked as per the latest IS 3854:1997  
First time in India - Unique Indicator design

| Pack   | Cat.Nos  | Switches 6A 230V AC                                 |
|--------|----------|-----------------------------------------------------|
| 20/200 | 6 794 00 | 6A Switch 1 way 1M Charcoal Grey                    |
| 20/200 | 6 794 01 | 6A Switch 2 way 1M Charcoal Grey                    |
| 20/200 | 6 794 02 | 6A Switch 1 way 1M with Indicator Charcoal Grey     |
| 20/200 | 6 794 03 | 6A Switch 1 way 1M with Light marking Charcoal Grey |
| 20/200 | 6 794 04 | 6A Switch 1 way 1M with Fan marking Charcoal Grey   |

| Pack   | Cat.Nos  | Switches 10 A 230 V AC                           |
|--------|----------|--------------------------------------------------|
| 10/100 | 6 794 05 | 10A Switch 1 way 2M Charcoal Grey                |
| 10/100 | 6 794 06 | 10A Switch 2 way 2M Charcoal Grey                |
| 10/100 | 6 794 07 | 10A intermediate Switch 2M Charcoal Grey         |
| 10/100 | 6 794 08 | 10A Switch 1 way 2M with Indicator Charcoal Grey |

| Pack   | Cat.Nos  | Switches 16A 230V AC                             |
|--------|----------|--------------------------------------------------|
| 20/200 | 6 794 09 | 16A Switch 1 way 1M Charcoal Grey                |
| 20/200 | 6 794 10 | 16A Switch 2 way 1M Charcoal Grey                |
| 20/200 | 6 794 11 | 16A Switch 1 way 1M with Indicator Charcoal Grey |

No. of Modules

1

1

1

1

1

2

2

2

2

1

1

1

# Myrius™

| Pack   | Cat.Nos  | Switches 20A 230V AC                                |
|--------|----------|-----------------------------------------------------|
| 20/200 | 6 794 12 | 20A Switch 1 way 1M Charcoal Grey                   |
| 10/100 | 6 794 13 | 20A DP Switch 1 way 2M Charcoal Grey                |
| 10/100 | 6 794 14 | 20A DP Switch 1 way 2M with Indicator Charcoal Grey |
| 10/100 | 6 794 15 | 20A Switch 2 way 2M Charcoal Grey                   |

| Pack   | Cat.Nos  | Switches 25A 230V AC                         |
|--------|----------|----------------------------------------------|
| 20/200 | 6 794 16 | 25A SP 1 way with Indicator Charcoal Grey 1M |

| Pack   | Cat.Nos  | Switches 32A 230V AC                          |
|--------|----------|-----------------------------------------------|
| 10/100 | 6 794 17 | 32A DP Switch 2M with Indicator Charcoal Grey |

No. of Modules

1

2

2

2

1

2

# Myrius™

## Push buttons



| Pack   | Cat.Nos  | Push Button 6A 230V AC                             |
|--------|----------|----------------------------------------------------|
| 20/200 | 6 794 18 | 6A Push Button SP 1 way 1M Charcoal Grey           |
| 20/200 | 6 794 19 | 6A Push Button 1 way 1M Indicator Charcoal Grey    |
| 20/200 | 6 794 20 | 6A Bell Push 1 way 1M Charcoal Grey                |
| 20/200 | 6 794 21 | 6A Bell Push 1 way 1M with Indicator Charcoal Grey |
| 10/100 | 6 794 22 | 6A Bell Push 1 way 2M Charcoal Grey                |
| 10/100 | 6 794 23 | 6A Bell Push 1 way 2M with Indicator Charcoal Grey |

No. of Modules  
1

1

1

1

2

2

# Myrius™

## Sockets



6 794 28 6 794 29 6 794 30

| Pack   | Cat.Nos  | Sockets 240V AC                                                                                                                  |
|--------|----------|----------------------------------------------------------------------------------------------------------------------------------|
|        |          | Conforming to IS 1293 : 2019<br>Shuttered for Child Safety<br>Shutter opens only with phase and neutral insertion simultaneously |
| 20/200 | 6 794 24 | 6/16 A 2 pin Euro US Socket 1M Charcoal Grey                                                                                     |
| 5/50   | 6 794 26 | 16 A 3 pin Switched Socket 3M Charcoal Grey                                                                                      |
| 10/100 | 6 794 25 | Multistandard Socket, 2/3 Pin - 6/10/13A 250V AC 2 Pin -15A for 127V, 2 Module Charcoal Grey                                     |
| 20/200 | 6 794 28 | 6A 5 Pin Universal Socket 2M Charcoal Grey                                                                                       |
| 5/50   | 6 794 29 | 6/16A Socket 3M Charcoal Grey                                                                                                    |
| 10/100 | 6 794 30 | 6/16A Socket 2M Charcoal Grey                                                                                                    |

No. of Modules

1

3

2

2

3

2

# Myrius™

## Fan regulator and dimmer



6 794 36      6 794 37      6 794 39

| Pack     | Cat.Nos  | Dimmers and Fan Regulators                                                                                                                                                                  |                                                     |
|----------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
|          |          | Fan regulators with ISI mark<br>Fan regulators with ease of speed selection<br>Fan regulator models available to suite almost all Ceiling Fans<br>High capacity sturdy design Light dimmers |                                                     |
| 5/50     | 6 794 36 |                                                                                                                                                                                             | Rotary Dimmer 400W 1M Charcoal Grey                 |
| 10/100   | 6 794 37 |                                                                                                                                                                                             | Rotary Light Dimmer 500W 2M Charcoal Grey           |
| 5/50     | 6 794 39 |                                                                                                                                                                                             | Fan Regulator 100W 1M Charcoal Grey                 |
| 10/100   | 6 794 40 |                                                                                                                                                                                             | Fan Regulator 100W 360 Degree 2M Charcoal Grey      |
| 10/100   | 6 794 41 |                                                                                                                                                                                             | Fan Regulator 120W 360 Degree 2M Charcoal Grey      |
| 1/10/100 | 6 794 42 |                                                                                                                                                                                             | Fan Regulator 70W 2M Charcoal Grey                  |
|          |          | <b>Skirting Light</b>                                                                                                                                                                       |                                                     |
| 5/25     | 6 794 48 |                                                                                                                                                                                             | Skirting Light with Warm White LED 3M Charcoal Grey |

No. of Modules

1

2

1

2

2

2

3

# Myrius™

## Skirting light, bell call indicators, buzzer, remote unit



6 794 49      6 794 50      6 794 52      6 793 03

| Pack   | Cat.Nos  | Bell Call Indicator |                                                                                                                                            | No. of Modules |
|--------|----------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| 20/200 | 6 794 49 |                     | Bell Call indicator Charcoal Grey 1M                                                                                                       | 1              |
| 20/200 | 6 794 50 |                     | Buzzer 230V 1M Charcoal Grey                                                                                                               | 1              |
|        |          | <b>Remote Unit</b>  |                                                                                                                                            |                |
| 1/5/20 | 6 794 52 |                     | Sleek, high quality, modular 4 switch Remote unit suitable for all type of loads<br>Remote control unit for Light and Fan 4M Charcoal Grey | 4              |
| 1/5/30 | 6 793 03 |                     | Remote control hand unit                                                                                                                   | -              |

# Myrius™

## Hospitality functions



6 794 53



6 794 54



6 794 55



6 794 59

| Pack   | Cat.Nos  | Hospitality Function                                                                                                   |
|--------|----------|------------------------------------------------------------------------------------------------------------------------|
| 1/10   | 6 794 53 | Hotel Keycard Switch<br>16A Key card switch<br>Suitable for all type of loads<br>Isolated contacts for Switch function |
| 10/100 | 6 792 55 | 16A Hotel Key FOB SW Charcoal Grey<br>Credit card size Key FOB                                                         |
| 10/100 | 6 794 54 | DND & CMR Indicator 1M + 1M Bell Push<br>Charcoal Grey                                                                 |
| 10/100 | 6 794 55 | DND & CMR (inside) Charcoal Grey                                                                                       |
| 1/16   | 6 794 58 | Shaver Socket 120/240V AC Monoblock with plate 2M<br>Charcoal Grey                                                     |
| 1/5/20 | 6 794 59 | Shaver Socket 120/230V AC Monoblock with plate 4M<br>Charcoal Grey                                                     |

No. of Modules  
2

-

2

2

2

4

# Myrius™

## Sockets and connectors



6 794 60



6 794 62



6 794 64



6 794 67



6 794 70

| Pack     | Cat.Nos  | TV Sockets                                            | No. of Modules |
|----------|----------|-------------------------------------------------------|----------------|
| 20/200   | 6 794 60 | T.V co-axial Socket Charcoal Grey                     | 1              |
| 20/200   | 6 794 62 | RJ11 Telephone Charcoal Grey                          | 1              |
| 20/200   | 6 794 63 | Double RJ11 Telephone Charcoal Grey                   | 1              |
| 20/200   | 6 794 64 | RJ 45 UTP CAT 5 tooless with shutter 1M Charcoal Grey | 1              |
| 20/200   | 6 794 65 | RJ 45 UTP CAT 6 tooless with shutter 1M Charcoal Grey | 1              |
| 10/100   | 6 794 66 | RJ 45 UTP CAT 6 tooless with shutter 2M Charcoal Grey | 2              |
| 1/10     | 6 794 67 | Preterminated AV connector 1M Charcoal Grey           | 1              |
| 1/10     | 6 794 68 | Preterminated HDMI Socket 1M Charcoal Grey            | 1              |
| 1/10     | 6 794 69 | Preterminated projector connector 1M Charcoal Grey    | 1              |
| 1/10/100 | 6 794 70 | Volume Controller 2M Charcoal Grey                    | 2              |

### Data & Voice

### Audio Video sockets

Used to transmit high-definition digital/analog Audio/Video streams between a source (Blu-ray player, computer) and a compatible receiver (T.V, LCD video projector...)

# Myrius™

## Electronic function



6 794 71



6 794 89



6 794 92



6 794 97



6 794 98



6 794 75



6 794 76

| Pack                                                                                                                               | Cat.Nos  | Motor Starter |                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------|----------|---------------|---------------------------------------------------------------------------|
| 1/10/100                                                                                                                           | 6 794 71 |               | 16A Motor Starter 2M Charcoal Grey                                        |
| 1/10/100                                                                                                                           | 6 794 72 |               | 25A Motor Starter 2M Charcoal Grey                                        |
| <b>USB Chargers (IS13252 (Part 1) / IEC 60950-1)</b>                                                                               |          |               |                                                                           |
| Complete family of USB chargers available<br>First time in India - USB C type Charger for fast charging with mandatory CRS marking |          |               |                                                                           |
| 1/5/100                                                                                                                            | 6 794 88 |               | USB charger 1500 mA 1M type A Charcoal Grey                               |
| 1/10/100                                                                                                                           | 6 794 89 |               | USB charger 3000 mA 2M type A & C Charcoal Grey                           |
| 1/5/100                                                                                                                            | 6 794 90 |               | USB charger 1500 mA 1M type C Charcoal Grey                               |
| <b>Combi (Socket+USB)</b>                                                                                                          |          |               |                                                                           |
| Combi USB tested for optimum operation with high output efficiency                                                                 |          |               |                                                                           |
| 1/5/50                                                                                                                             | 6 794 92 |               | Combi twin USB 3100 mA multistandard Socket type A Charcoal Grey          |
| 1/5/50                                                                                                                             | 6 794 93 |               | Combi twin USB 3100 mA multistandard Socket type A & type C Charcoal Grey |
| 1/5/50                                                                                                                             | 6 794 94 |               | Combi twin USB 3100 mA multistandard Socket type C Charcoal Grey          |

No. of Modules

2

2

1

2

1

3

3

3

| Pack                                                                                                                   | Cat.Nos  | Sound Diffusion                                                                                                                                                                                                                                     |                                              |
|------------------------------------------------------------------------------------------------------------------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
|                                                                                                                        |          | Bluetooth Technology. Voice messages for easy understanding<br>Compact 2M design with all control functions<br>Inbuilt amplifier, 1.5W X2 with 8 Ohms speaker<br>Ideal for living room, kitchen, Bedroom, offices, canteen<br>Greater than 8m range |                                              |
| 1/10/100                                                                                                               | 6 794 97 |                                                                                                                                                                                                                                                     | Bluetooth sound diffusion 2M Charcoal Grey   |
| <b>Rotary Dimmer Universal</b>                                                                                         |          |                                                                                                                                                                                                                                                     |                                              |
| First time in India-High quality universal dimmer for all type of light loads including LED loads<br>Comes in 1 module |          |                                                                                                                                                                                                                                                     |                                              |
| 1/10/120                                                                                                               | 6 794 98 |                                                                                                                                                                                                                                                     | Rotary LED Light Dimmer 50W 1M Charcoal Grey |
| <b>Accessories</b>                                                                                                     |          |                                                                                                                                                                                                                                                     |                                              |
| 20/200                                                                                                                 | 6 794 75 |                                                                                                                                                                                                                                                     | Cable outlet 8mm 1M Charcoal Grey            |
| 40/400                                                                                                                 | 6 794 76 |                                                                                                                                                                                                                                                     | Blanking plate 1M Charcoal Grey              |

No. of Modules

2

1

1

1



Switches are ISI marked as per the latest IS 3854:1997  
First time in India- Unique Signature design.  
With Anti-Bacterial properties

| Pack                                                                                                                              | Cat.Nos  | Switches 6A 230V AC |                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------|----------|---------------------|--------------------------------------------------------------------------|
| 20/200                                                                                                                            | 6 793 20 |                     | 6A SW 1 way 1M White Anti-Bacterial                                      |
| 20/200                                                                                                                            | 6 793 21 |                     | 6A SW 2 way 1M White Anti-Bacterial                                      |
| 20/200                                                                                                                            | 6 793 24 |                     | 6A Bell Push 1M White Anti-Bacterial                                     |
| Switches 16A 230V AC                                                                                                              |          |                     |                                                                          |
| 20/200                                                                                                                            | 6 793 22 |                     | 16A SW 1 way 1M White Anti-Bacterial                                     |
| 20/200                                                                                                                            | 6 793 23 |                     | 16A SW 2 way 1M White Anti-Bacterial                                     |
| Sockets 240V AC                                                                                                                   |          |                     |                                                                          |
| Conforming to IS 1293 : 2019<br>Shuttered for Child Safety<br>Shutter opens only with phase and neutral insertion simultaneously. |          |                     |                                                                          |
| 10/100                                                                                                                            | 6 793 26 |                     | Multistandard Socket, 2/3 Pin - 6/10/13A 250V AC 2 Pin -15A for 127V, 2M |
| 20/200                                                                                                                            | 6 793 27 |                     | 6A 5 Pin Universal Socket 2M                                             |
| 10/100                                                                                                                            | 6 793 28 |                     | 6/16A Socket 2M                                                          |
| 5/50                                                                                                                              | 6 793 29 |                     | 6/16A Socket 3M                                                          |

No. of Modules

1

1

1

1

1

2

2

2

3

### Fan Regulators

Fan Regulators with ISI mark  
Fan Regulators with ease of speed selection  
Fan Regulator models available to suite almost all Ceiling Fans

10/100 6 793 25 Fan Regulator 120W 360 Degree 2M

No. of Modules

2

### TV sockets

20/200 6 793 30 TV. Socket 1M Anti-Bacterial

1

### Data & Voice

20/200 6 793 31 RJ 11 Telephone Socket 1M Anti-Bacterial

1

20/200 6 793 32 RJ 45 CAT 6 UTP Anti-Bacterial 1M

1

### Accessories

40/400 6 793 33 Blanking plate 1M White Anti-Bacterial

1

# Myrius™

## Plates with frame



6 795 02

6 795 04



6 795 06

6 795 08

| Pack   | Cat.Nos  | Plate Frame White      | No. of Modules | Dimension (mm) |
|--------|----------|------------------------|----------------|----------------|
| 20/200 | 6 795 01 | Plate+frame 1M White   | 1              | 86 x 86        |
| 20/200 | 6 795 02 | Plate+frame 2M White   | 2              | 86 x 86        |
| 10/100 | 6 795 03 | Plate+frame 3M White   | 3              | 86 x 121       |
| 10/100 | 6 795 04 | Plate+frame 4M White   | 4              | 86 x 146       |
| 5/50   | 6 795 06 | Plate+frame 6M White   | 6              | 86 x 224       |
| 5/50   | 6 795 08 | Plate+frame 8M White   | 8              | 86 x 245       |
| 5/25   | 6 795 09 | Plate+frame 2x4M White | 2x4            | 172 x 146      |
| 5/50   | 6 795 10 | Plate+frame 9M White   | 9              | 288 X 86       |
| 10     | 6 795 12 | Plate+frame 12M White  | 12             | 172 x 224      |
| 10     | 6 795 16 | Plate+frame 16M White  | 16             | 172 x 224      |
| 10     | 6 795 18 | Plate+frame 18M White  | 18             | 240 x 224      |

# Myrius™



6 795 22

6 795 23



6 795 24

6 795 28

| Pack   | Cat.Nos  | Plate Frame Ice White      | No. of Modules | Dimension (mm) |
|--------|----------|----------------------------|----------------|----------------|
| 1/5/30 | 6 795 21 | Plate+frame 1M Ice White   | 1              | 86 x 86        |
| 1/5/30 | 6 795 22 | Plate+frame 2M Ice White   | 2              | 86 x 86        |
| 1/20   | 6 795 23 | Plate+frame 3M Ice White   | 3              | 86 x 121       |
| 1/20   | 6 795 24 | Plate+frame 4M Ice White   | 4              | 86 x 146       |
| 1/10   | 6 795 26 | Plate+frame 6M Ice White   | 6              | 86 x 224       |
| 1/10   | 6 795 28 | Plate+frame 8M Ice White   | 8              | 86 x 245       |
| 1/5    | 6 795 29 | Plate+frame 2x4M Ice White | 2x4            | 172 x 146      |
| 1/5    | 6 795 32 | Plate+frame 12M Ice White  | 12             | 172 x 224      |
| 1/5    | 6 795 36 | Plate+frame 16M Ice White  | 16             | 172 x 224      |
| 1/5    | 6 795 38 | Plate+frame 18M Ice White  | 18             | 240 x 224      |

# Myrius™

## Plates with frame



6 795 42

6 795 44



6 775 46

6 795 48

| Pack   | Cat.Nos  | Plate Frame Ice Black |                            | No. of Modules | Dimension (mm) |
|--------|----------|-----------------------|----------------------------|----------------|----------------|
| 1/5/30 | 6 795 41 |                       | Plate+frame 1M Ice Black   | 1              | 86 x 86        |
| 1/5/30 | 6 795 42 |                       | Plate+frame 2M Ice Black   | 2              | 86 x 86        |
| 1/20   | 6 795 43 |                       | Plate+frame 3M Ice Black   | 3              | 86 x 121       |
| 1/20   | 6 795 44 |                       | Plate+frame 4M Ice Black   | 4              | 86 x 146       |
| 1/10   | 6 795 46 |                       | Plate+frame 6M Ice Black   | 6              | 86 x 224       |
| 1/10   | 6 795 48 |                       | Plate+frame 8M Ice Black   | 8              | 86 x 245       |
| 1/5    | 6 795 49 |                       | Plate+frame 2x4M Ice Black | 2x4            | 172 x 146      |
| 1/5    | 6 795 52 |                       | Plate+frame 12M Ice Black  | 12             | 172 x 224      |
| 1/5    | 6 795 56 |                       | Plate+frame 16M Ice Black  | 16             | 172 x 224      |
| 1/5    | 6 795 58 |                       | Plate+frame 18M Ice Black  | 18             | 240 x 224      |

# Myrius™



6 795 62

6 795 64



6 795 66

6 795 68

| Pack   | Cat.Nos  | Plate Frame Pearl Champagne |                                  | No. of Modules | Dimension (mm) |
|--------|----------|-----------------------------|----------------------------------|----------------|----------------|
| 1/5/30 | 6 795 61 |                             | Plate+frame 1M Pearl Champagne   | 1              | 86 x 86        |
| 1/5/30 | 6 795 62 |                             | Plate+frame 2M Pearl Champagne   | 2              | 86 x 86        |
| 1/20   | 6 795 63 |                             | Plate+frame 3M Pearl Champagne   | 3              | 86 x 121       |
| 1/20   | 6 795 64 |                             | Plate+frame 4M Pearl Champagne   | 4              | 86 x 146       |
| 1/10   | 6 795 66 |                             | Plate+frame 6M Pearl Champagne   | 6              | 86 x 224       |
| 1/10   | 6 795 68 |                             | Plate+frame 8M Pearl Champagne   | 8              | 86 x 245       |
| 1/5    | 6 795 69 |                             | Plate+frame 2x4M Pearl Champagne | 2x4            | 172 x 146      |
| 1/5    | 6 795 72 |                             | Plate+frame 12M Pearl Champagne  | 12             | 172 x 224      |
| 1/5    | 6 795 76 |                             | Plate+frame 16M Pearl Champagne  | 16             | 172 x 224      |
| 1/5    | 6 795 78 |                             | Plate+frame 18M Pearl Champagne  | 18             | 240 x 224      |

# Myrius™

## Plates with Frame



6 795 82

6 795 84



6 795 86

6 795 88

| Pack   | Cat.Nos  | Plate Frame Sonic Silver |                               | No. of Modules | Dimension (mm) |
|--------|----------|--------------------------|-------------------------------|----------------|----------------|
| 1/5/30 | 6 795 81 |                          | Plate+frame 1M Sonic Silver   | 1              | 86 x 86        |
| 1/5/30 | 6 795 82 |                          | Plate+frame 2M Sonic Silver   | 2              | 86 x 86        |
| 1/20   | 6 795 83 |                          | Plate+frame 3M Sonic Silver   | 3              | 86 x 121       |
| 1/20   | 6 795 84 |                          | Plate+frame 4M Sonic Silver   | 4              | 86 x 146       |
| 1/10   | 6 795 86 |                          | Plate+frame 6M Sonic Silver   | 6              | 86 x 224       |
| 1/10   | 6 795 88 |                          | Plate+frame 8M Sonic Silver   | 8              | 86 x 245       |
| 1/5    | 6 795 89 |                          | Plate+frame 2x4M Sonic Silver | 2x4            | 172 x 146      |
| 1/5    | 6 795 92 |                          | Plate+frame 12M Sonic Silver  | 12             | 172 x 224      |
| 1/5    | 6 795 96 |                          | Plate+frame 16M Sonic Silver  | 16             | 172 x 224      |
| 1/5    | 6 795 98 |                          | Plate+frame 18M Sonic Silver  | 18             | 240 x 224      |

# Myrius™



6 796 02

6 796 04



6 796 06

6 796 08

| Pack   | Cat.Nos  | Plate Frame Dark Fade |                            | No. of Modules | Dimension (mm) |
|--------|----------|-----------------------|----------------------------|----------------|----------------|
| 1/5/30 | 6 796 01 |                       | Plate+frame 1M Dark Fade   | 1              | 86 x 86        |
| 1/5/30 | 6 796 02 |                       | Plate+frame 2M Dark Fade   | 2              | 86 x 86        |
| 1/20   | 6 796 03 |                       | Plate+frame 3M Dark Fade   | 3              | 86 x 121       |
| 1/20   | 6 796 04 |                       | Plate+frame 4M Dark Fade   | 4              | 86 x 146       |
| 1/10   | 6 796 06 |                       | Plate+frame 6M Dark Fade   | 6              | 86 x 224       |
| 1/10   | 6 796 08 |                       | Plate+frame 8M Dark Fade   | 8              | 86 x 245       |
| 1/5    | 6 796 09 |                       | Plate+frame 2x4M Dark Fade | 2x4            | 172 x 146      |
| 1/5    | 6 796 12 |                       | Plate+frame 12M Dark Fade  | 12             | 172 x 224      |
| 1/5    | 6 796 16 |                       | Plate+frame 16M Dark Fade  | 16             | 172 x 224      |
| 1/5    | 6 796 18 |                       | Plate+frame 18M Dark Fade  | 18             | 240 x 224      |


# Myrius™

## Plates with frame



6 796 22

6 796 24

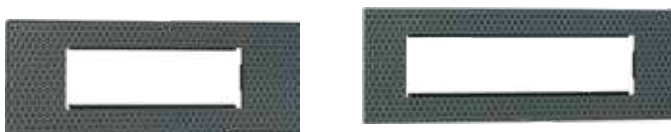

6 796 26

6 796 28

| Pack   | Cat.Nos  | Plate Frame Interlude                                                                                          |
|--------|----------|----------------------------------------------------------------------------------------------------------------|
| 1/5/30 | 6 796 21 |  Plate+frame 1M Interlude     |
| 1/5/30 | 6 796 22 |  Plate+frame 2M Interlude     |
| 1/20   | 6 796 23 |  Plate+frame 3M Interlude     |
| 1/20   | 6 796 24 |  Plate+frame 4M Interlude     |
| 1/10   | 6 796 26 |  Plate+frame 6M Interlude    |
| 1/10   | 6 796 28 |  Plate+frame 8M Interlude   |
| 1/5    | 6 796 29 |  Plate+frame 2x4M Interlude |
| 1/5    | 6 796 32 |  Plate+frame 12M Interlude  |
| 1/5    | 6 796 36 |  Plate+frame 16M Interlude  |
| 1/5    | 6 796 38 |  Plate+frame 18M Interlude  |

| No. of Modules | Dimension (mm) |
|----------------|----------------|
| 1              | 86 x 86        |
| 2              | 86 x 86        |
| 3              | 86 x 121       |
| 4              | 86 x 146       |
| 6              | 86 x 224       |
| 8              | 86 x 245       |
| 2x4            | 172 x 146      |
| 12             | 172 x 224      |
| 16             | 172 x 224      |
| 18             | 240 x 224      |

# Myrius™



6 796 42

6 796 44



6 796 46

6 796 48

| Pack   | Cat.Nos  | Plate Frame Trinity                                                                                            |
|--------|----------|----------------------------------------------------------------------------------------------------------------|
| 1/5/30 | 6 796 41 |  Plate+frame 1M Trinity     |
| 1/5/30 | 6 796 42 |  Plate+frame 2M Trinity     |
| 1/20   | 6 796 43 |  Plate+frame 3M Trinity     |
| 1/20   | 6 796 44 |  Plate+frame 4M Trinity     |
| 1/10   | 6 796 46 |  Plate+frame 6M Trinity    |
| 1/10   | 6 796 48 |  Plate+frame 8M Trinity   |
| 1/5    | 6 796 49 |  Plate+frame 2x4M Trinity |
| 1/5    | 6 796 52 |  Plate+frame 12M Trinity  |
| 1/5    | 6 796 56 |  Plate+frame 16M Trinity  |
| 1/5    | 6 796 58 |  Plate+frame 18M Trinity  |

| No. of Modules | Dimension (mm) |
|----------------|----------------|
| 1              | 86 x 86        |
| 2              | 86 x 86        |
| 3              | 86 x 121       |
| 4              | 86 x 146       |
| 6              | 86 x 224       |
| 8              | 86 x 245       |
| 2x4            | 172 x 146      |
| 12             | 172 x 224      |
| 16             | 172 x 224      |
| 18             | 240 x 224      |

# Myrius™

## Plates with frame



6 796 62



6 796 64



6 796 66



6 796 68

| Pack   | Cat.Nos  | Plate Frame Luminar |                          | No. of Modules | Dimension (mm) |
|--------|----------|---------------------|--------------------------|----------------|----------------|
| 1/5/30 | 6 796 61 |                     | Plate+frame 1M Luminar   | 1              | 86 x 86        |
| 1/5/30 | 6 796 62 |                     | Plate+frame 2M Luminar   | 2              | 86 x 86        |
| 1/20   | 6 796 63 |                     | Plate+frame 3M Luminar   | 3              | 86 x 121       |
| 1/20   | 6 796 64 |                     | Plate+frame 4M Luminar   | 4              | 86 x 146       |
| 1/10   | 6 796 66 |                     | Plate+frame 6M Luminar   | 6              | 86 x 224       |
| 1/10   | 6 796 68 |                     | Plate+frame 8M Luminar   | 8              | 86 x 245       |
| 1/5    | 6 796 69 |                     | Plate+frame 2x4M Luminar | 2x4            | 172 x 146      |
| 1/5    | 6 796 72 |                     | Plate+frame 12M Luminar  | 12             | 172 x 224      |
| 1/5    | 6 796 76 |                     | Plate+frame 16M Luminar  | 16             | 172 x 224      |
| 1/5    | 6 796 78 |                     | Plate+frame 18M Luminar  | 18             | 240 x 224      |

# Myrius™



6 796 82



6 796 84



6 796 86



6 796 88

| Pack   | Cat.Nos  | Plate Frame Stellar |                          | No. of Modules | Dimension (mm) |
|--------|----------|---------------------|--------------------------|----------------|----------------|
| 1/5/30 | 6 796 81 |                     | Plate+frame 1M Stellar   | 1              | 86 x 86        |
| 1/5/30 | 6 796 82 |                     | Plate+frame 2M Stellar   | 2              | 86 x 86        |
| 1/20   | 6 796 83 |                     | Plate+frame 3M Stellar   | 3              | 86 x 121       |
| 1/20   | 6 796 84 |                     | Plate+frame 4M Stellar   | 4              | 86 x 146       |
| 1/10   | 6 796 86 |                     | Plate+frame 6M Stellar   | 6              | 86 x 224       |
| 1/10   | 6 796 88 |                     | Plate+frame 8M Stellar   | 8              | 86 x 245       |
| 1/5    | 6 796 89 |                     | Plate+frame 2x4M Stellar | 2x4            | 172 x 146      |
| 1/5    | 6 796 92 |                     | Plate+frame 12M Stellar  | 12             | 172 x 224      |
| 1/5    | 6 796 96 |                     | Plate+frame 16M Stellar  | 16             | 172 x 224      |
| 1/5    | 6 796 98 |                     | Plate+frame 18M Stellar  | 18             | 240 x 224      |

## Plates with frame ( antibacterial range )



6 793 42



6 793 44



6 793 46



6 793 48

| Pack   | Cat.Nos  | Plate Frame Anti-Bacterial |                                 |  | No. of Modules | Dimension (mm) |
|--------|----------|----------------------------|---------------------------------|--|----------------|----------------|
| 20/200 | 6 793 41 |                            | Plate+frame 1M Anti-Bacterial   |  | 1              | 86 x 86        |
| 20/200 | 6 793 42 |                            | Plate+frame 2M Anti-Bacterial   |  | 2              | 86 x 86        |
| 10/100 | 6 793 43 |                            | Plate+frame 3M Anti-Bacterial   |  | 3              | 86 x 121       |
| 10/100 | 6 793 44 |                            | Plate+frame 4M Anti-Bacterial   |  | 4              | 86 x 146       |
| 5/50   | 6 793 46 |                            | Plate+frame 6M Anti-Bacterial   |  | 6              | 86 x 224       |
| 5/50   | 6 793 48 |                            | Plate+frame 8M Anti-Bacterial   |  | 8              | 86 x 245       |
| 5/25   | 6 793 49 |                            | Plate+frame 2x4M Anti-Bacterial |  | 2x4            | 172 x 146      |
| 5/50   | 6 793 50 |                            | Plate+frame 9M Anti-Bacterial   |  | 9              | 288 X 86       |
| 10     | 6 793 52 |                            | Plate+frame 12M Anti-Bacterial  |  | 12             | 172 x 224      |
| 10     | 6 793 56 |                            | Plate+frame 16M Anti-Bacterial  |  | 16             | 172 x 224      |
| 10     | 6 793 58 |                            | Plate+frame 18M Anti-Bacterial  |  | 18             | 240 x 224      |

# Myrius™

## Mounting Boxes



| Pack | Cat.Nos  | Metal Flush Boxes                                                                  |                                      |
|------|----------|------------------------------------------------------------------------------------|--------------------------------------|
| 40   | 6 890 07 |   | Flush Box - 1/2 Module               |
| 40   | 6 890 08 |   | Flush Box - 3 Module                 |
| 40   | 6 890 09 |   | Flush Box - 4 Module                 |
| 40   | 6 890 10 |   | Flush Box - 6 Module                 |
| 40   | 6 890 42 |   | Flush Box - 8 Module                 |
| 20   | 6 890 31 |   | Flush Box - 8 Module (2 row x 4)     |
| 10   | 6 890 11 |   | Flush Box - 12/16 (2 row x 6) Module |
| 10   | 6 890 12 |  | Flush Box - 18 Module                |

No. of Modules

1/2  
3  
4  
6  
8  
8  
12/16  
18

# Myrius™

## Plastic and metal surface boxes



| Pack  | Cat.Nos  | Plastic Surface Boxes                                                                |                                        |
|-------|----------|--------------------------------------------------------------------------------------|----------------------------------------|
| 10/50 | 6 733 02 |   | Surface Box - 1/2 Module               |
| 5/35  | 6 733 03 |   | Surface Box - 3 Module                 |
| 5/25  | 6 733 04 |   | Surface Box - 4 Module                 |
| 1/10  | 6 733 06 |   | Surface Box - 6 Module                 |
| 1/5   | 6 733 08 |   | Surface Box - 8 Module                 |
| 1/5   | 6 733 05 | Surface Box - 8 (2 row x 4) Module                                                   |                                        |
| 1/6   | 6 890 21 |   | Surface Box - 12/16 (2 row x 6) Module |
| 1/4   | 6 890 22 |  | Surface Box - 18 Module                |

No. of Modules

1/2  
3  
4  
6  
8  
8  
12/16  
18

## Metal Surface Boxes

### Technical data

#### 6A touch switch 2M-1W


Cat.No 6 793 09

#### Characteristics


|  |                  |                  |         |                            |                       |
|--|------------------|------------------|---------|----------------------------|-----------------------|
|  |                  |                  |         |                            |                       |
|  | -5 °C ... +45 °C | -1 °C ... +70 °C | ≤ 40 mm | 100 - 240 V~<br>50 / 60 Hz | 1...4 mm <sup>2</sup> |

|       | 1     | 2        | 3        | 4    | 5    | 6    | 7          |
|-------|-------|----------|----------|------|------|------|------------|
|       |       |          |          |      |      |      |            |
|       |       |          |          |      |      |      |            |
| 240V~ | 1440W | 1000V AC | 1000V AC | 250W | 250W | 250W | 4A(PF≥0.6) |
| 100V~ | 600W  | 400V AC  | 400V AC  | 100W | 100W | 100W |            |


#### Operation



#### Wiring

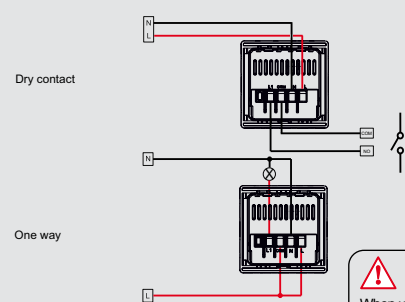

#### Fixing

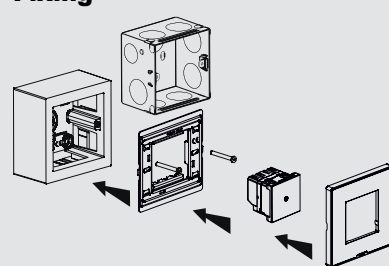

#### Safety instructions

When use this product, please install a fuse or protective device to protect the product in the line of COM input, the protective device should be equal to 6 A / 100-240 V.

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.

### Technical data

#### Electronic switch 6A touch 2M-1W-2-SW control


Cat.No 6 793 08

#### Characteristics


|  |             |               |         |                        |                     |
|--|-------------|---------------|---------|------------------------|---------------------|
|  |             |               |         |                        |                     |
|  | 0 °C/+45 °C | -10 °C/+70 °C | ≤ 40 mm | 100-240 V~<br>50/60 Hz | 1~4 mm <sup>2</sup> |

|         | ①     | ②       | ③       | ④    | ⑤    | ⑥    | ⑦           |
|---------|-------|---------|---------|------|------|------|-------------|
|         |       |         |         |      |      |      |             |
|         |       |         |         |      |      |      |             |
| 240 V ~ | 1000W | 700 VAC | 700 VAC | 250W | 250W | 250W | 4 A(FP=0.6) |
| 100 V ~ | 400W  | 300 VAC | 300 VAC | 100W | 100W | 100W |             |

#### Operation

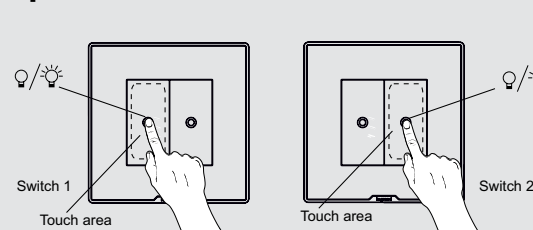


#### Wiring

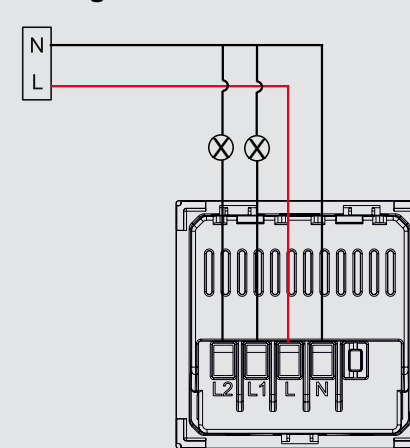

# Myrius™

Electronic switch 6A touch 2M 1W-2-SW control (contd.)

## Fixing

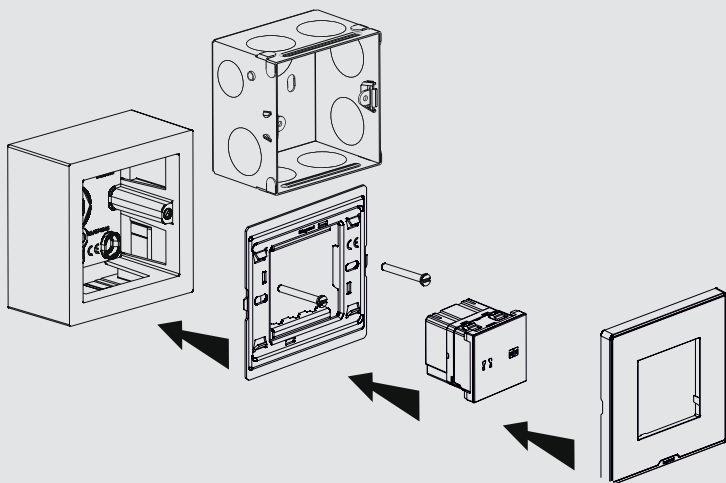

### Safety instructions

When use this product, please install a fuse or protective device to protect the product in the line of COM input, the protective device should be equal to 6 A / 100-240 V.  
This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.

# Myrius™


6 A touch switch 2M-2W

## ■ Technical data

### 6A touch switch 2M-2W

Cat.No 6 793 10


## Characteristics




|              |               |              |                            |                       |
|--------------|---------------|--------------|----------------------------|-----------------------|
|              |               |              | 100 - 240 V~<br>50 / 60 Hz |                       |
| -5 °C/+45 °C | -10 °C/+70 °C | $\leq 40$ mm |                            | 1...4 mm <sup>2</sup> |

|       | 1     | 2       | 3       | 4    | 5    | 6    | 7          |
|-------|-------|---------|---------|------|------|------|------------|
|       |       |         |         |      |      |      |            |
| 240V~ | 1000W | 700V AC | 700V AC | 250W | 250W | 250W | 4A(PF≥0.6) |
| 100V~ | 400W  | 300V AC | 300V AC | 100W | 100W | 100W |            |


## Operation



## Wiring

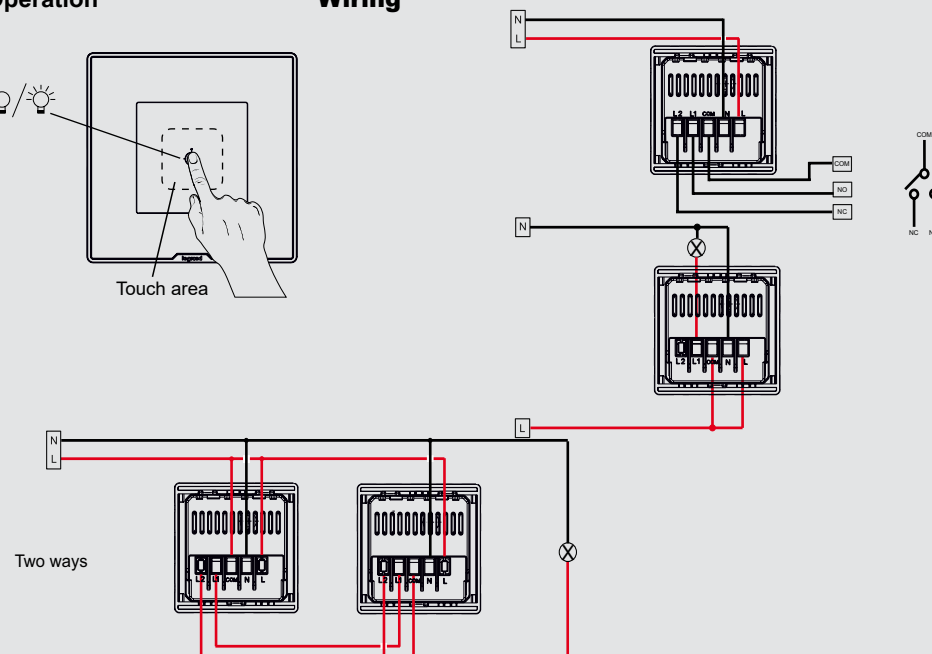

### Fixing

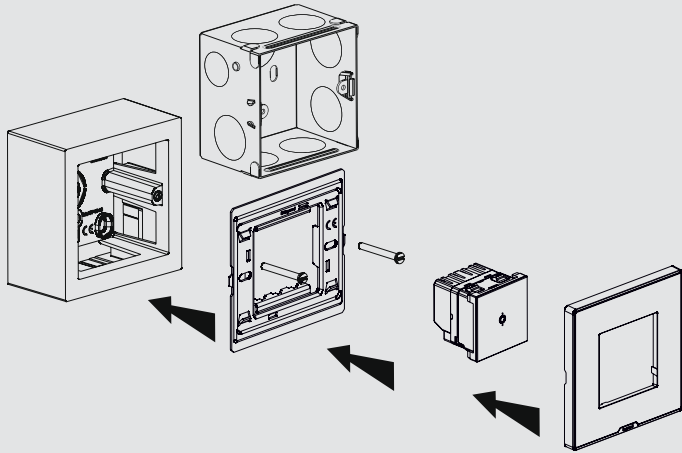

#### Safety instructions

When use this product, please install a fuse or protective device to protect the product in the line of COM input, the protective device should be equal to 6 A / 100~240 V.

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire.

Before carrying out the installation, read the instructions and take account of the product's specific mounting location.

Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND.

Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees.


Only use genuine accessories.

### ■ Technical data

#### 16A touch switch 2M-1W

Cat.No 6 793 13

### Characteristics



-5 °C.../+45 °C

-10 °C.../+70 °C


≤ 40 mm

100 - 240 V~  
50 / 60 Hz


1...4 mm<sup>2</sup>

|       | 1     | 2        | 3        | 4    | 5    | 6    | 7          |
|-------|-------|----------|----------|------|------|------|------------|
|       |       |          |          |      |      |      |            |
|       |       |          |          |      |      |      |            |
| 240V~ | 3000W | 2000V AC | 2000V AC | 600W | 600W | 500W | 8A(PF≥0.6) |
| 100V~ | 1250W | 800V AC  | 800V AC  | 250W | 250W | 300W |            |


### Operation



### Wiring

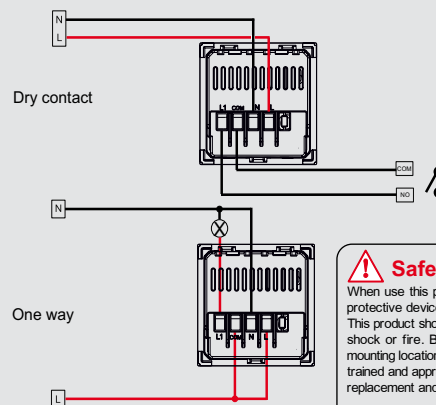

### Fixing

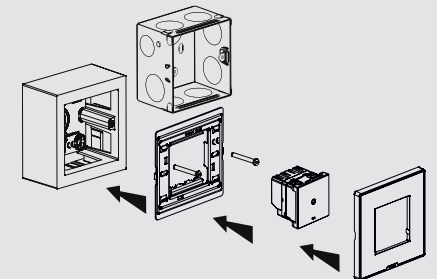

#### Safety instructions

When use this product, please install a fuse or protective device to protect the product in the line of COM input, the protective device should be equal to 6 A / 100~240 V.

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.

# Myrius™

## 6 A touch switch Bell Push 2M

### Technical data

#### 6A touch switch Bell Push 2M

Cat.No 6 793 06


#### Characteristics

|  |              |               |         |                            |                       |
|--|--------------|---------------|---------|----------------------------|-----------------------|
|  |              |               |         |                            |                       |
|  | -5 °C/+45 °C | -10 °C/+70 °C | ≤ 40 mm | 100 - 240 V~<br>50 / 60 Hz | 1...4 mm <sup>2</sup> |


|       | 1     | 2    | 3    | 4    |
|-------|-------|------|------|------|
|       |       |      |      |      |
| 240V~ | 1440W | 200W | 200W | 200W |
| 100V~ | 600W  | 100W | 100W | 100W |

- 1 Incandescent lamp
- 2 Electronic triggered with tunes
- 3 Electric magnetic long bell (ding dong)
- 4 Electric Buzzer-Vibrating


#### Wiring

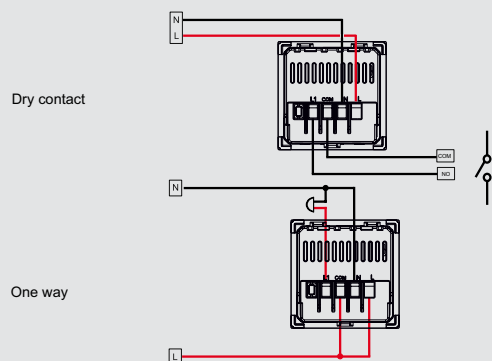

#### Operation



#### Fixing

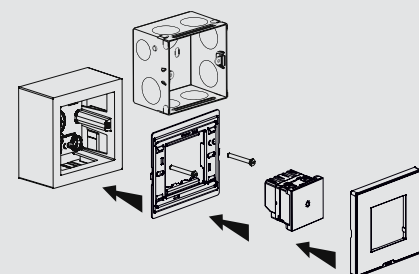

### ! Safety instructions

When use this product, please install a fuse or protective device to protect the product in the line of COM input, the protective device should be equal to 6 A / 100-240 V.

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.

# Myrius™

## 300 W universal LED touch dimmer 2M

### Technical data

#### 300W universal LED touch dimmer 2M


Cat.No 6 793 15

#### Characteristics

|  |                 |                  |         |                            |                       |
|--|-----------------|------------------|---------|----------------------------|-----------------------|
|  |                 |                  |         |                            |                       |
|  | -5 °C.../+45 °C | -10 °C.../+70 °C | ≤ 40 mm | 100 - 240 V~<br>50 / 60 Hz | 1...4 mm <sup>2</sup> |

|               | R        | L               | C/L             |                 |                   |
|---------------|----------|-----------------|-----------------|-----------------|-------------------|
|               |          |                 | Dimmable        |                 |                   |
|               |          |                 |                 |                 |                   |
| 240V~<br>50Hz | 5...300W | 5...<br>300V AC | 5...<br>300V AC | 5...<br>300V AC | 5...75W<br>≤ 10 x |
| 100V~<br>60Hz | 5...150W | 5...<br>150V AC | 5...<br>150V AC | 5...<br>150V AC | 5...37W<br>≤ 10 x |

#### Local dimming:

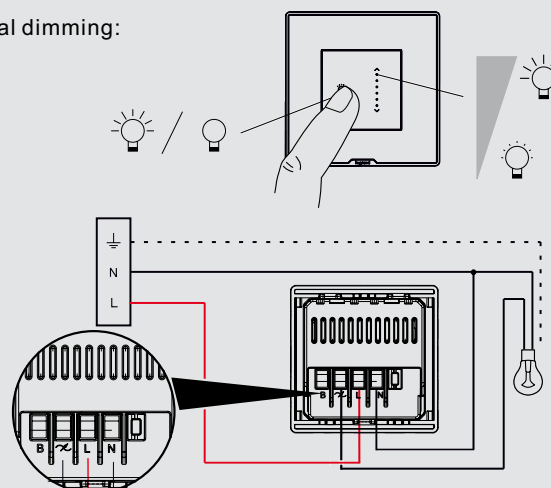


### Technical data



#### 300 W Universal LED touch dimmer - 2M

Cat.No 6 793 15


### Characteristics




Local+remote/auxiliary dimming:

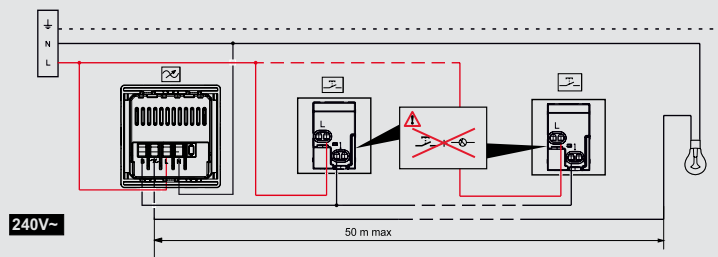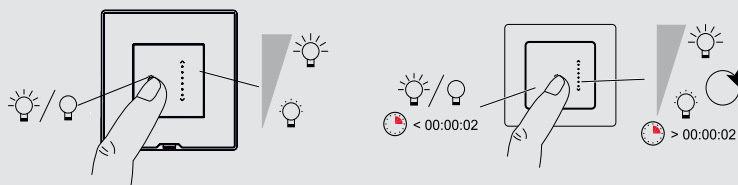


### Min. brightness settings

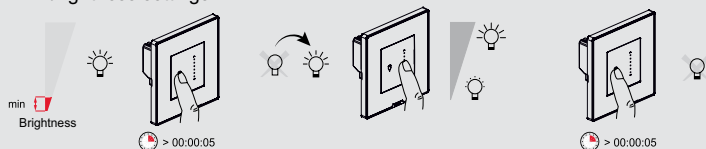


### CFL setting

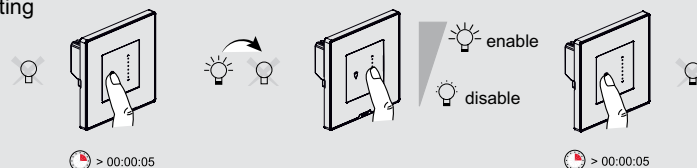


### Load type setting

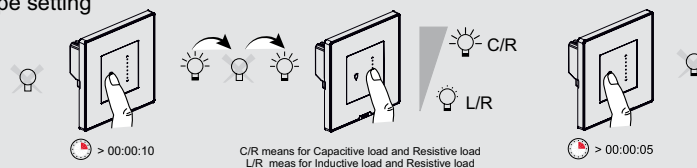

Factory reset

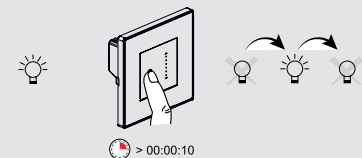

### Fixing

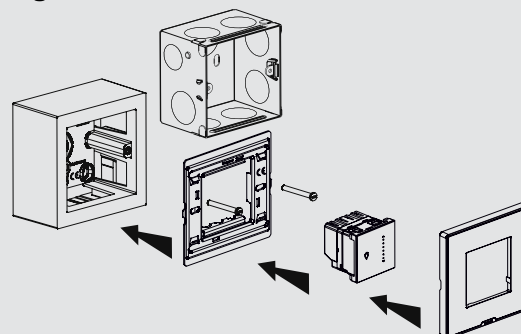

### Safety instructions

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.

# Myrius™



Touch Fan regulator 2M-100W

## Technical data

### Touch Fan regulator 2M-100W

Cat.No 6 793 05



## Characteristics



240V~  
50HZ



|          |      |
|----------|------|
| ①        |      |
| 240~50HZ | 100W |

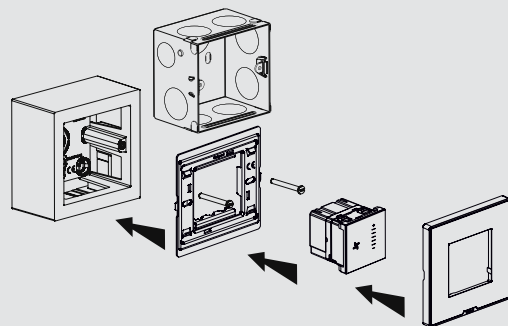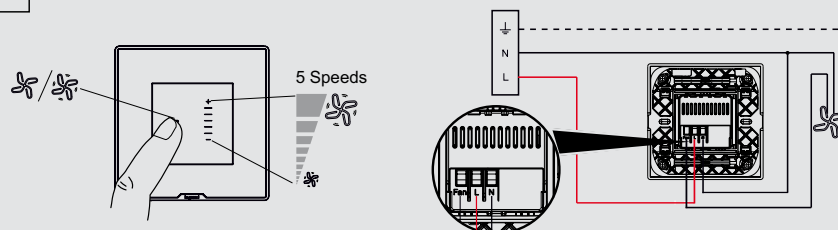

## Safety instructions

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.

# Myrius™




Electronic switch touch- curtain controller 2 mod

## Technical data

### Electronic switch touch- curtain controller 2M

Cat.No 6 793 07

## Characteristics




100-240 V~  
50/60 Hz




|        |          |
|--------|----------|
| ①      |          |
|        | Ⓜ        |
| 240 V~ | 200V AC  |
| 100 V~ | 100 V AC |

## Operation

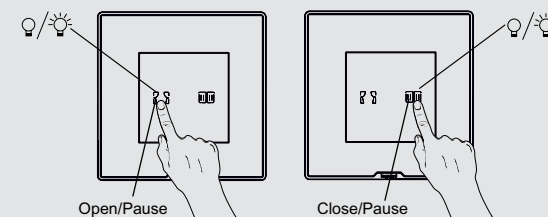


## Wiring

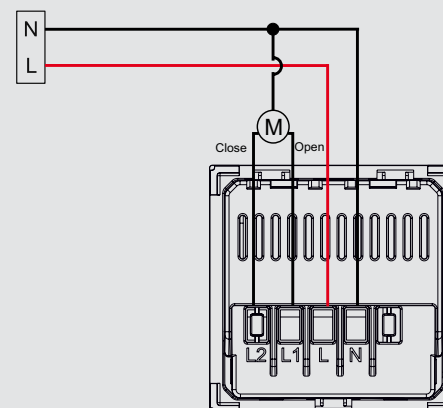

# Myrius™

Electronic switch touch- curtain controller 2 mod (contd.)

## Fixing

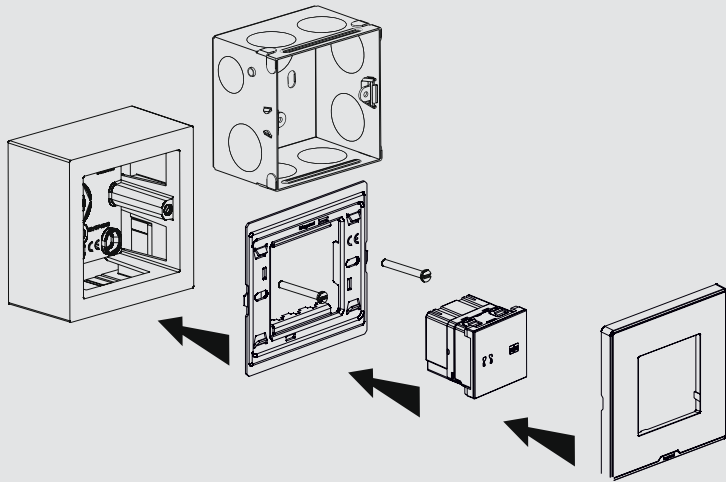

### Safety instructions

When use this product, please install a fuse or protective device to protect the product in the line of COM input, the protective device should be equal to 6 A / 100~240 V.  
This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.


# Myrius™

Bluetooth sound receiver

## Technical data

### Bluetooth Sound Receiver

Cat.Nos 6 792 99 / 6 794 97




## Utilization


|             |                   |                                        |                  |       |                                         |
|-------------|-------------------|----------------------------------------|------------------|-------|-----------------------------------------|
|             |                   |                                        | Bluetooth (A2DP) |       | Works with Bluetooth technology devices |
| 100-240V AC | STEREO<br>2X1.5 W | 1 WX2/16 Ω<br>1.5 WX2/8 Ω<br>2 WX2/4 Ω | 4 mA Max AC      | > 8 m | +5 °C<br>+45 °C                         |

Bluetooth device Name - "legrand"

## Wiring

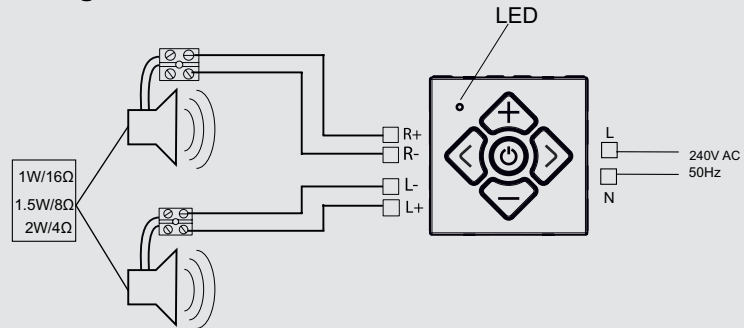

## Function

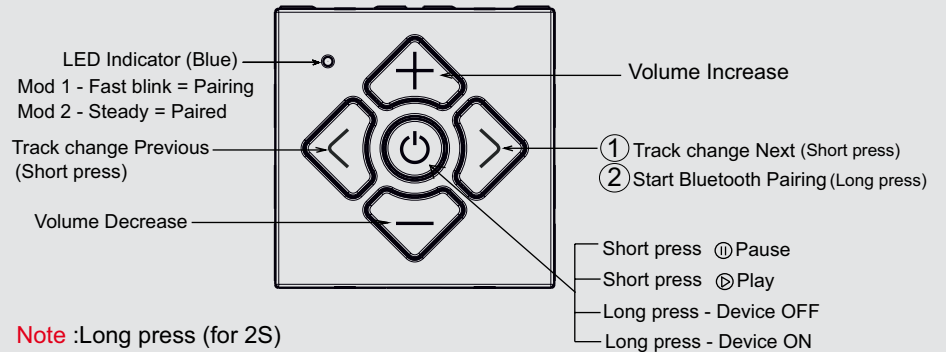


# Myrius™

Bluetooth sound receiver (contd.)

## Technical data


### Bluetooth Connection

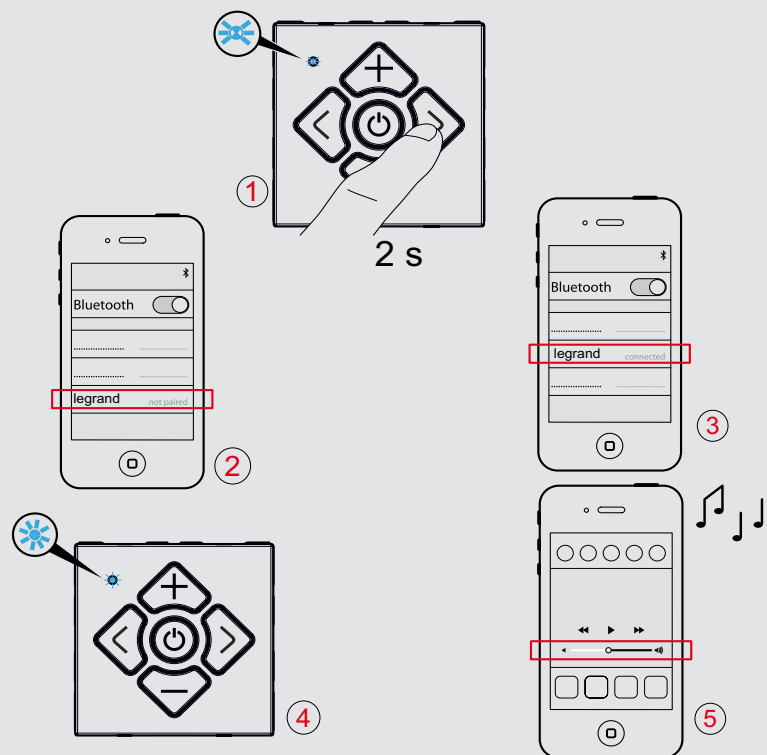

# Myrius™

Bluetooth sound receiver (contd.)

## Mounting

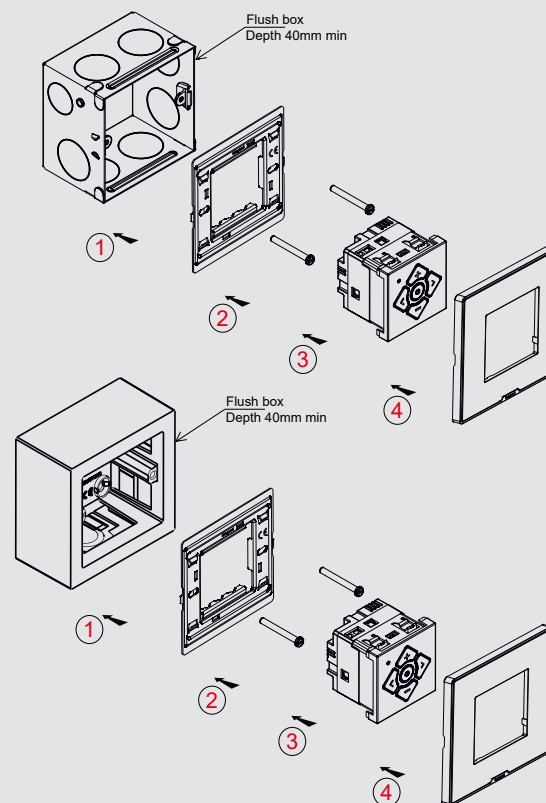

### Safety instructions

GB (IE)

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location.


Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees.

Use only Legrand brand accessories.

### Technical data

#### Remote for Fan and Light mechanism

Cat.Nos 6 794 52 / 6 792 52




|                                |           |         |         |            |         |         |
|--------------------------------|-----------|---------|---------|------------|---------|---------|
| 40°<br>0°<br>240 V AC<br>50 Hz | ①         | ②       | ③       | ④          | ⑤       | ⑥       |
| Max.                           | 1x2.5 mm² | 400V AC | 200V AC | 200V AC    | 150V AC | 100V AC |
|                                |           |         |         | Q26<br>Q38 |         |         |

### Utilization


1. Incandescent bulbs
2. Halogen lamp 230V~
3. Low voltage halogen lamps
4. Fluorescent tube light
5. Ceiling Fan (OFF + 4 Variable speed steps)
6. LED Lamps (Max 3 Units)

### Description


#### Infrared receiver and controller unit

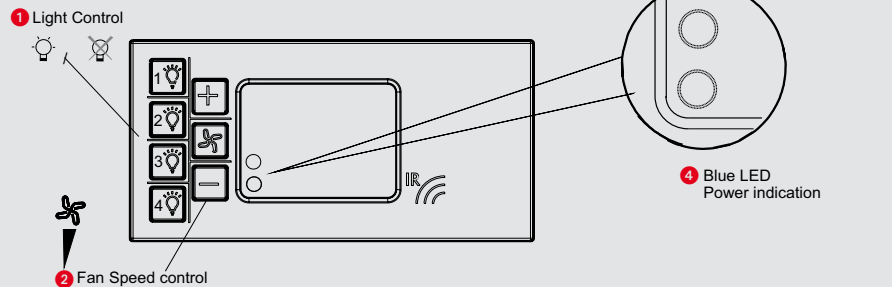


#### Infrared remote transmitter

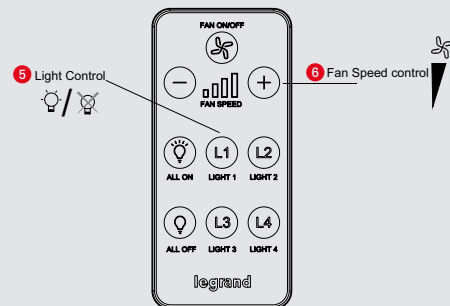

### Wiring diagram

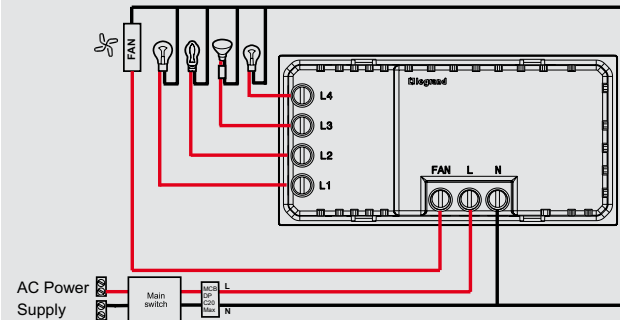

### Replacement of old battery

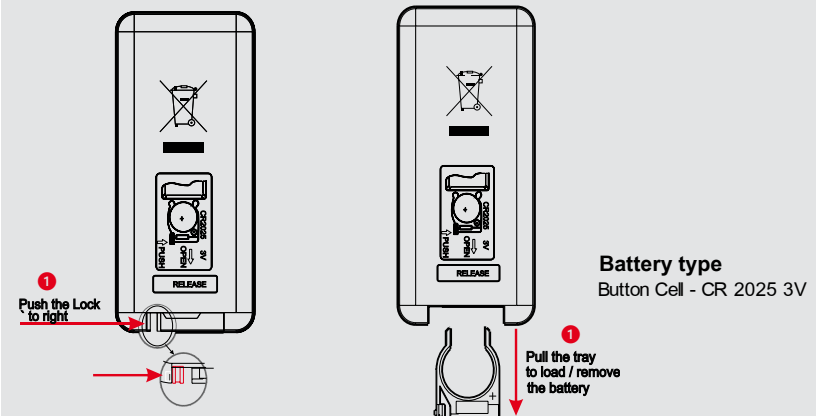

### Safety instructions

This product should be installed in line with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by LEGRAND. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Use only Legrand brand accessories.

# Myrius™


## Rotary LED dimmer

### Technical data

#### Rotary LED dimmer 1M

Cat.Nos 6 793 04 / 6 794 98


### Characteristics




|                  |                     |         |                            |                         |  |
|------------------|---------------------|---------|----------------------------|-------------------------|--|
|                  |                     |         |                            |                         |  |
| 0° C ... + 45° C | - 10° C ... + 70° C | ≤ 40 mm | 100 - 240 V~<br>50 / 60 Hz | 1 x 2.5 mm <sup>2</sup> |  |

| 240 V | Max. | 200W | 200W | 200V AC | 200V AC | 200V AC | 200V AC | 50W or 8 lamps max. | 50W or 8 lamps max. |
|-------|------|------|------|---------|---------|---------|---------|---------------------|---------------------|
|       | Min. | 3W   | 3W   | 3V AC   | 3V AC   | 3V AC   | 3V AC   | 3W                  | 3W                  |
| 100 V | Max. | 100W | 100W | 100V AC | 100V AC | 100V AC | 100V AC | 37W or 8 lamps max. | 37W or 8 lamps max. |
|       | Min. | 3W   | 3W   | 3V AC   | 3V AC   | 3V AC   | 3V AC   | 3W                  | 3W                  |


### Operation



### Wiring



### Fixing

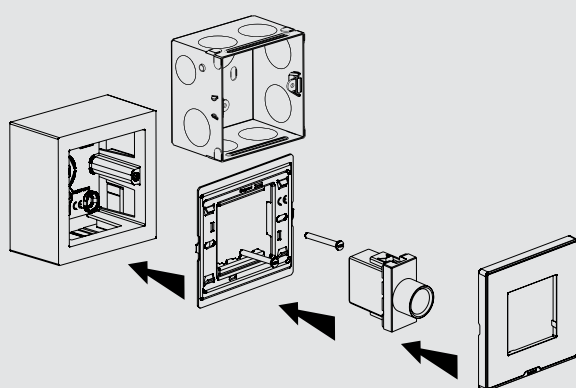

### Safety instructions

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.





# Myrius™

## Wireless charger


### Technical data

#### Wireless induction charger

Cat.No 6 792 95



Wireless charging only with compatible mobile phones having induction receiver technology.

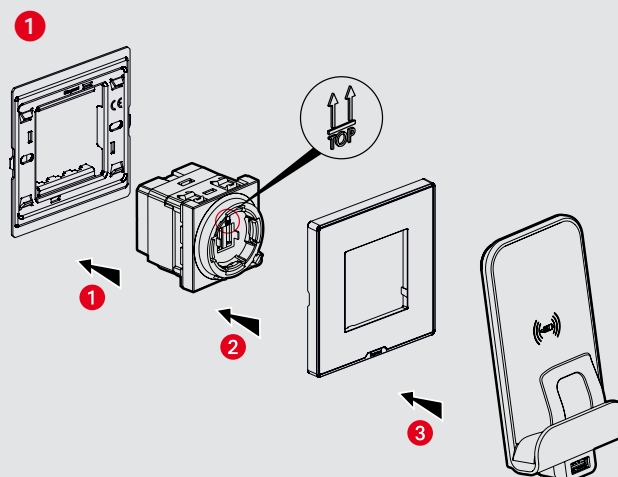


# Myrius™

Wireless charger (contd.)

## Technical data

### Wireless charger (contd.)

Cat.No 6 792 95

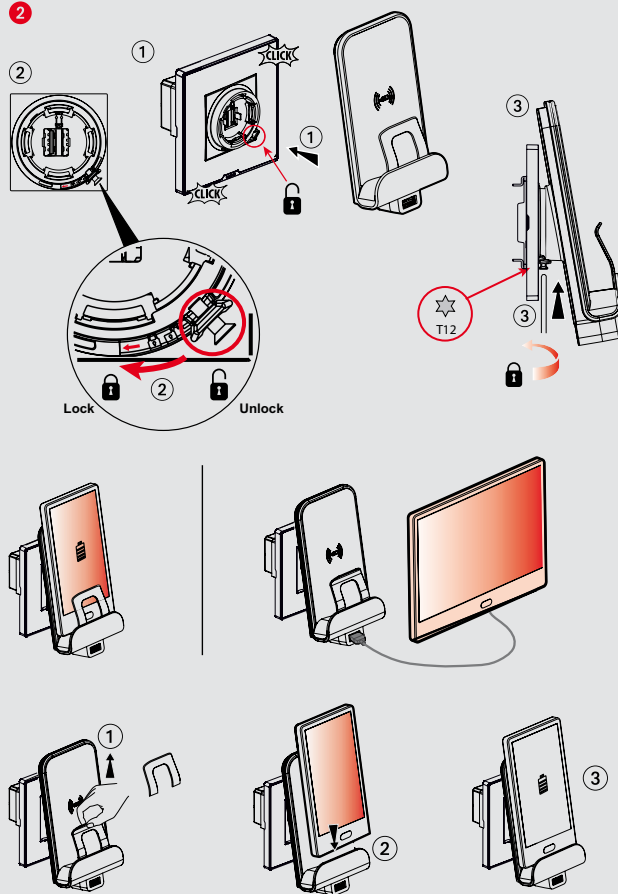

#### ⚠ Safety instructions

This product should be installed in compliance with installation rules, preferably by a qualified electrician. Incorrect installation and/or incorrect use can lead to risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location.  
Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Use only Legrand brand accessories.

# Myrius™


Infrared sensor switch 400 W

## Technical data

### Infrared sensor switch




Cat.No 6 792 51

## Characteristics



|              |                |              |                            |                     |
|--------------|----------------|--------------|----------------------------|---------------------|
|              |                |              | 100 - 240 V~<br>50 / 60 Hz |                     |
| -5 °C/+45 °C | -10 °C/+70 °C  | 40 mm        |                            | 1~4 mm <sup>2</sup> |
|              |                |              |                            |                     |
| PIR          | day/dusk/night | 30S/90S/180S | 40 m <sup>2</sup>          |                     |



|        | ①    | ②       | ③       | ④       | ⑤       | ⑥       | ⑦       |
|--------|------|---------|---------|---------|---------|---------|---------|
|        |      |         |         |         |         |         |         |
| 230 V~ | 400W | 200V AC | 200V AC | 200V AC | 200V AC | 100V AC | 100V AC |
| 110 V~ | 200W | 1.7 A   | 0.85 A  | 0.85 A  | 0.85A   | 0.42A   | 0.42A   |

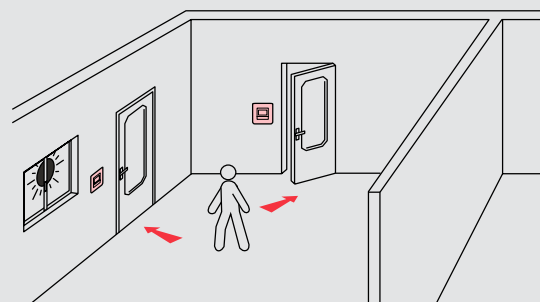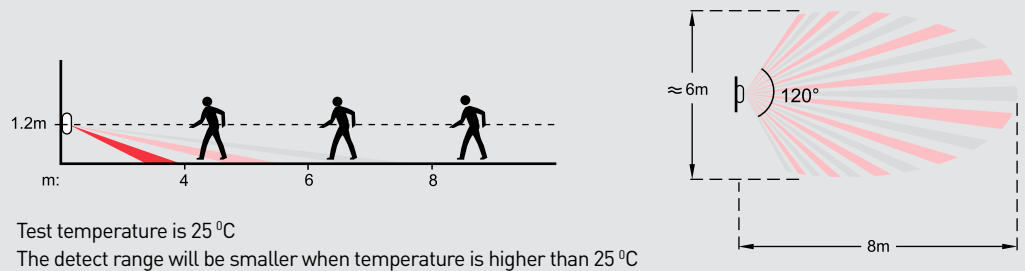


# Myrius™

Infrared Sensor switch 400 W (contd.)

## Wiring

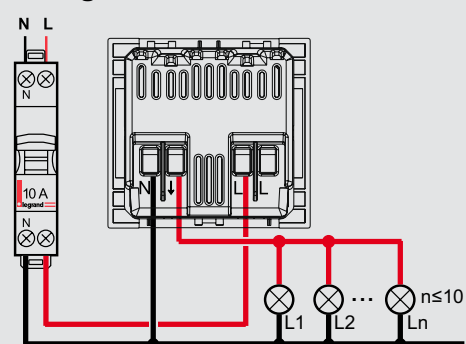


## Working

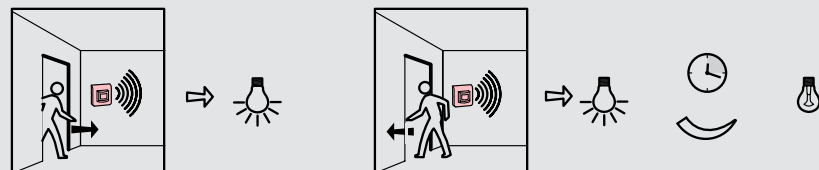

\* A delay of 1min to be observed after power ON for functioning of the switch.

## Fixing

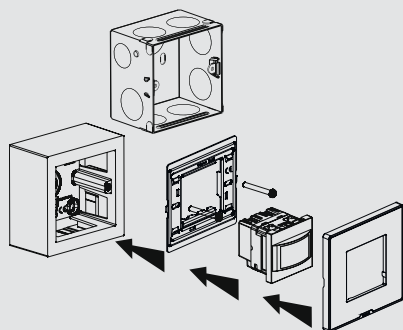

### ⚠ Safety instructions

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.

# Myrius™


16A Hotel Key FOB switch

## Technical data

### 16A Hotel Key FOB switch

Cat.Nos 6 792 53

## Characteristics



|  | 16A max                  |
|--|--------------------------|
|  | 16 A / 230 V~μ cosφ = 1  |
|  | 4 A / 230 V~μ cosφ = 0.6 |


## Utilization

|      | ①                            | ②          | ③     | ④                           | ⑤        |
|------|------------------------------|------------|-------|-----------------------------|----------|
|      | 40°<br>0°<br>230 V~<br>50 Hz | Light bulb | Motor | Fluorescent lamp<br>Ø26 Ø38 | LED lamp |
| Max. |                              | 1800W      | 800W  | 400V AC<br>800V AC          | 100V AC  |


1. 1800 W lamp incandescent or halogen with ferromagnetic transformer.
2. 800 W inductive (motor).
3. 400 VA compensated fluorescent lamp.
4. 800 VA fluorescent lamp with electronic ballast.
5. 100 VA LED lamp.

**Important:** For load higher than indicated in the above table, use a contactor.


## Installation

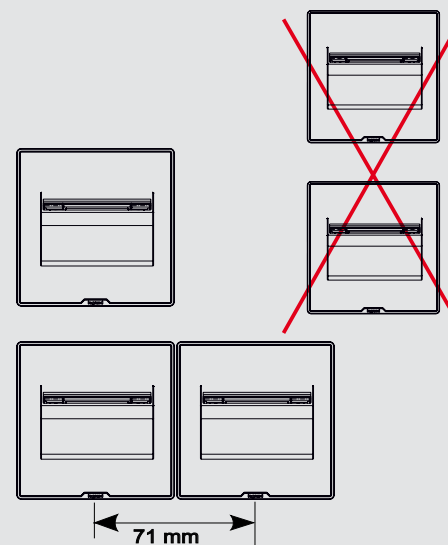


## Wiring

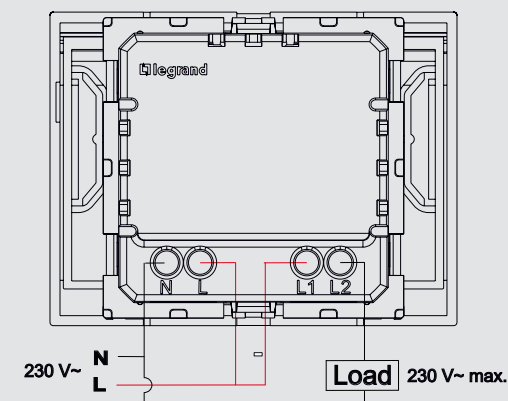


## Fixing

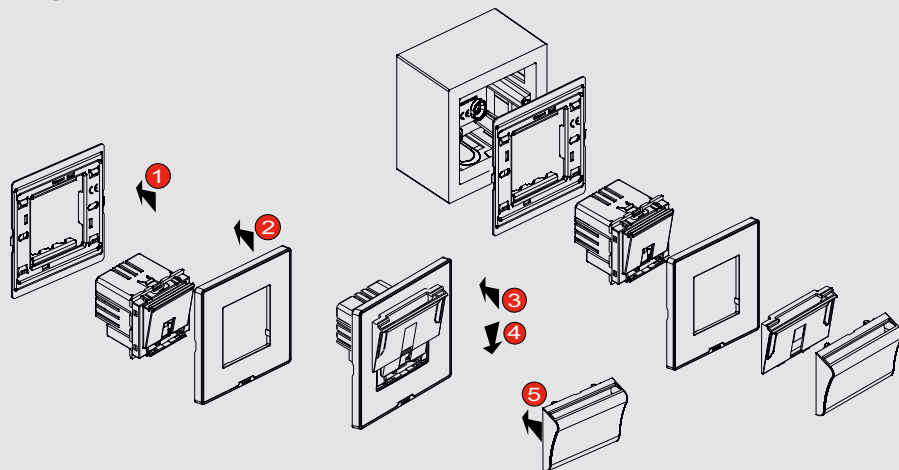

## Use

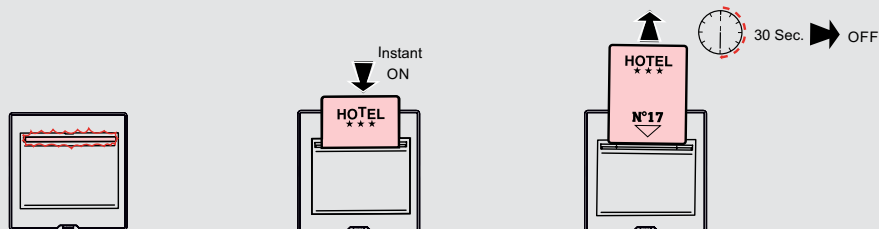

## Dismantling / Maintenance

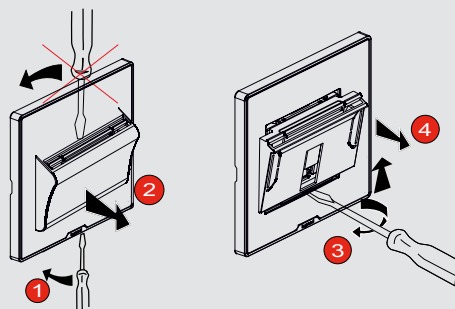

### Safety instructions

This product should be installed in compliance with installation rules, preferably by a qualified electrician. Incorrect installation and use can lead to risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location.

Do not open up, dismantle, alter or modify the device except where specifically required to do so by the instructions. All Legrand products must be opened and repaired exclusively by personnel trained and approved by Legrand. Any unauthorised opening or repair completely cancels all liabilities and the rights to replacement and guarantees.


Use only Legrand brand accessories.

## Technical data

### Shaver Socket

Cat.Nos 6 792 58

## Characteristics



|             |               |         |                    |                     |
|-------------|---------------|---------|--------------------|---------------------|
|             |               |         |                    |                     |
| 0 °C/+45 °C | -10 °C/+70 °C | ≥ 50 mm | 230 V~<br>50/60 Hz | 1~4 mm <sup>2</sup> |

### Application

This product will be used in hotel, it can provide safe power for electric shavers. The standby power is 0W, no plug in no output power (please take care, this output to be used for electric shavers only.)

### Technical partmeter

Input: 230V ~ 50/60 Hz

Output: 230V~50/60 Hz or 115V ~ 50/60 Hz


### Operation

Slide switch configuration


- Switch set to 115 V~, output is 115 V AC.
- Switch set to 230 V~, output is 230 V AC.

### Caution


- Do not use for other application, except shaver.
- Before plug in the shaver socket, please confirm the voltage of your product, set the right voltage 115V or 230V.



## Wiring

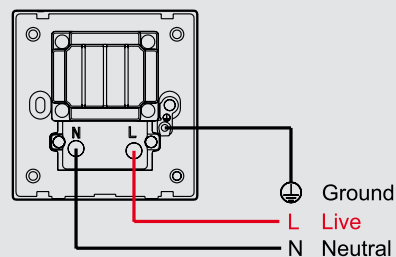

## Fixing

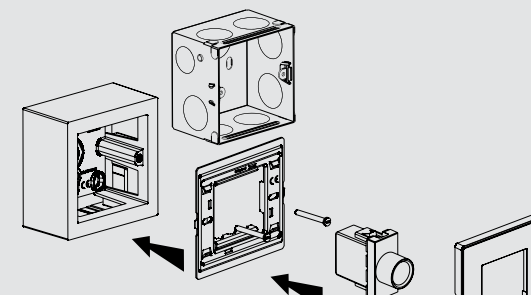

### Safety instructions

This product should be installed preferably by a qualified electrician. Incorrect installation and use can entail risk of electric shock or fire. Before carrying out the installation, read the instructions and take account of the product's specific mounting location. Do not open up the device. All Legrand products must be exclusively opened and repaired by personnel trained and approved by LEGRAND. Any unauthorized opening or repair completely cancels all liabilities and the rights to replacement and guarantees. Only use genuine accessories.

# Myrius™


## DND & CMR Internal and External Unit

### Technical data

#### DND & CMR Internal and External Unit

Cat.Nos 6 792 57 / 6 794 55

6 792 56 / 6 794 54



#### Characteristics


|             |                         |                   |                                       |
|-------------|-------------------------|-------------------|---------------------------------------|
| voltage     |                         |                   | Audible signal<br>6 792 50 - 6 794 50 |
| 230 V~ 50Hz | 2 x 2.5 mm <sup>2</sup> | - 5° C<br>+ 40° C | 230 V~<br>70 - 90 dB                  |

#### Description

Call indicator

6 792 56 / 6 794 54

(A) (B)



Call control

6 792 57 / 6 794 55


(C) (D)




#### Option

Buzzer

(E)




#### Wiring

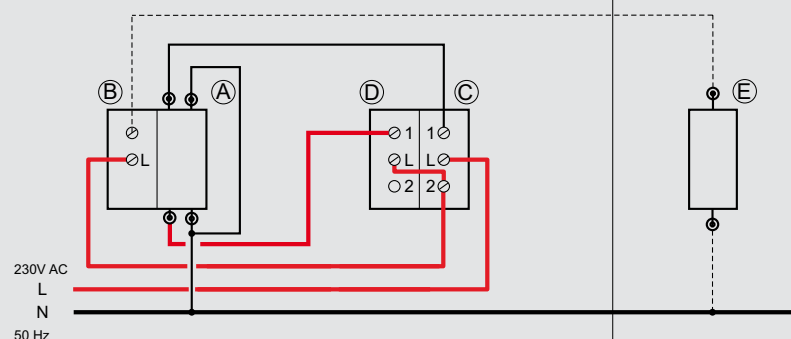


# Myrius™

## DND & CMR Internal and External Unit (contd.)

### Assembly Internal Unit

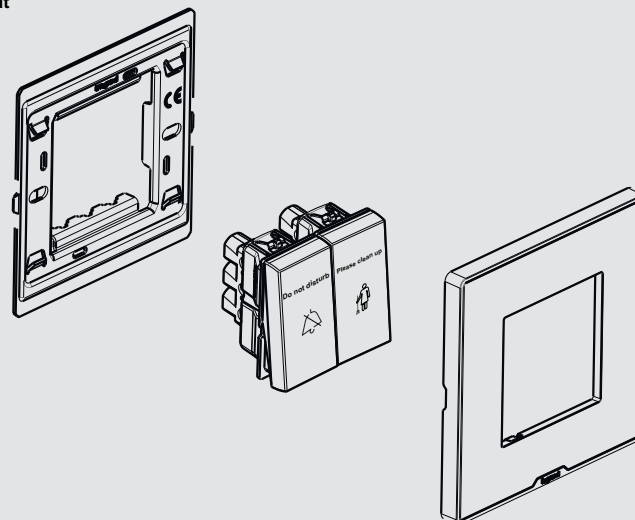

### External Unit

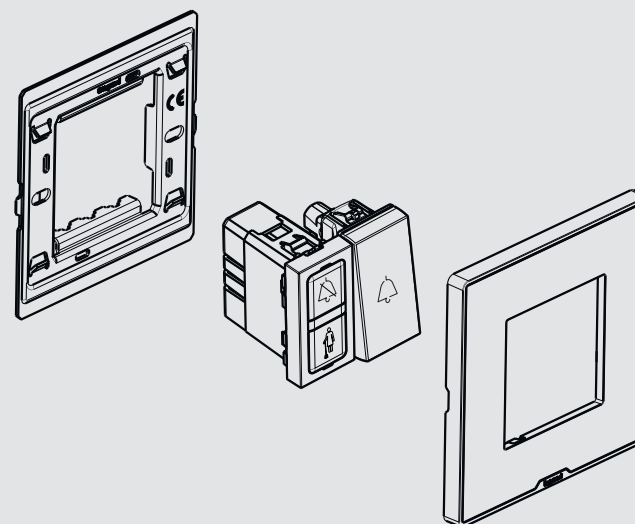


Operation

1- Instruction : «Do not disturb»

Bedroom





Corridor



2- Instruction : «PLEASE CLEAN»





3- No call




Note

If both buttons are pressed simultaneously, priority is given to the «don't disturb» call

Bedroom



Corridor



NOTES

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

NOTES

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....


.....

.....

.....

.....

.....

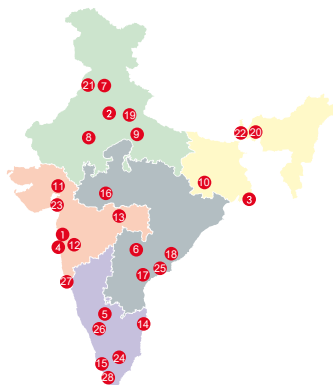

### Head offices

- 61 & 62, 6<sup>th</sup> Floor,  
Kalpataru Square, Kondivita Road,  
Off Andheri-Kurla Road, Andheri (E),  
**MUMBAI** – 400 059.  
Tel : (022) 3041 6200  
Fax : (022) 3041 6201  
Website : [www.legrand.co.in](http://www.legrand.co.in)

### Regional sales offices

- B-225, 4th Floor, Okhla Industrial Area, Phase -1,  
**NEW DELHI** – 110020.  
Tel : (011) 3990 2200, 2699 0046,  
(011) 2699 0028 / 29 / 30 / 31  
Fax : (011) 2699 0047
- Unit no 1203, Ambuja Eco Centre,  
Sector 5, Salt lake,  
**KOLKATA** – 700 091.
- C/203, Corporate Avenue, Atul Projects,  
Near Mirador Hotel, Chakala,  
Andheri - Ghatkopar Link Road,  
Andheri – East, **MUMBAI** – 400 099.  
Tel : (022) 6230 1000

- Ferozes Manor, Situated at 58  
Hospital Road, Shivaji Nagar,  
**BANGALORE**– 560 001.  
Tel : (080) 6822 0000

- Prestige Phoenix, 1st Floor,  
Next to Lifestyle Building,  
Begumpet,  
**HYDERABAD** – 500 016.

### Branch offices

- Unit No. 203, Tower B Bestech  
Business Towers, Sector-66, Mohali,  
**CHANDIGARH** -160017.  
Telefax : (0172) 5019 008
- Building No-128, Mansarovar Link Road,  
Gopalpura Bypass, Mohan Nagar,  
Near Ridhi Sidhi Flyover,  
**JAIPUR** – 302 018.  
Tel : 0141-2208 665
- 209-A, 2<sup>nd</sup> Floor, Cyber Heights,  
Opp. Indira Gandhi Pratishthan,  
Vibhuti Khand, Gomti Nagar  
**LUCKNOW**- 226 010.  
Tel : (0522) 431 9316
- 202 & 203, Sunrise, Forum 100,  
Burdwan Compound, Lalpur,  
**RANCHI** – 834 001.  
Tel : (651) 660 5400
- A 101-102, Mondeal Heights,  
Besides Novotel Hotel, Sarkhej  
Gandhinagar Highway (S G Highway),  
**AHMEDABAD** – 380 015.  
Tel : (079) 6134 0555
- 8th Floor, Pinnacle Park Avenue,  
Opp. Law College, Law College Road  
Next To German Bakery,  
Shivaji Nagar, **PUNE** – 411 004.  
Tel : (020) 6729 5601 / 600

- Plot No.95, 2nd Floor, Shreyash  
Heights, VIP Road, Ramdaspath,  
**NAGPUR** – 440 010.  
Tel : (0712) 2440 900

- 10 B, Prestige Center Court, Office Block,  
Vijaya Forum Mall, #183, N.S.K. Salai,  
Vadapalani, **CHENNAI** – 600 026.  
Tel : (044) 6612 2800

- J. B. Manjooran Estate,  
Door No 50/1107 A9, 3<sup>rd</sup> Floor,  
Bye Pass Junction, Edappally,  
**COCHIN** – 682 024.  
Tel : (0484) 6604 700

- 204-205, Megapolis Square,  
579, M G Road,  
**INDORE** – 452 001.  
Tel : (0731) 4999 891

- MF-2, Datta's Lords House,  
Jammi Chettu Street, Mogalrajapuram,  
**VIJAYAWADA** – 520 010.  
Tel : (0866) 248 2393/6393

- Plot No. 359, Saheed Nagar,  
2<sup>nd</sup> Floor,  
**BHUBANESWAR** – 751 007.  
Tel : (0674) 254 0623

- Unit - 1 & 2, Vijay Park,  
Main Chakrata Road,  
**DEHRADUN**- 248 001.  
Uttarakhand.  
Tel : (0135) 661 6100

- House No. 97, Ground Floor,  
Rajgarh Main Road,  
Opp. City Heart Nursing Home,  
**GUWAHATI** – 781 007.

### Area offices

- Cabin No. 9, 2<sup>nd</sup> Floor,  
Madhok Trade Centre,  
Madhok Complex, Ferozpur Road,  
**LUDHIANA** – 141 001.  
Tel : (0161) 277 0301
- 94, Udhham Singh Sarani,  
Ground Floor, Ashrampara,  
**SILIGURI** – 734 001.  
Tel : (0353) 264 1067
- A-207, Universal Business  
Center, Near Madhuvan circle,  
L.P. Savani Road, Adajan,  
**SURAT** - 395 009.  
Tel.: (0261) 263 3861
- Aparna Towers, 1<sup>st</sup> Floor, 2/3,  
Bypass Road,  
**MADURAI** – 625 010.  
Telefax : (0452) 230 8414
- 43-9-205, 3<sup>rd</sup> Floor, Plot No. 10,  
Subbalakshmi Nagar,  
Opp. More Super Market,  
**VISHAKAPATHANAM** – 530 016.  
Tel.: (0891) 273 5652 / 2739363
- B-5, 1<sup>st</sup> Floor, Thirumalai Towers,  
723, Avanashi Road,  
**COIMBATORE**– 641 018.  
Tel.: (0422) 668 3200
- 515 & 516, Gera Imperium Grand,  
Patto centre, Panaji  
**GOA** – 403 001.
- 1st Floor, Cordial Bharathi,  
Nanthancodu,  
**THIRUVANANTHAPURAM**,  
KERALA- 695 003

### Technical assistance from Legrand

Telephonic technical assistance for selection of products, technical information, guidance, wiring diagrams and estimation is now made available to you at each Regional Office. Contact the Technical Officer of Legrand at the following telephone numbers

**New Delhi** : Tel.: (011) 2699 0028, 3990 2200  
**Kolkata** : Tel.: (033) 4021 3535 / 36  
**Mumbai** : Tel.: (022) 6230 1000  
**Bangalore** : Tel.: (080) 6822 0000  
**Hyderabad** : Tel.: (040) 4567 1717

For other places, contact the nearest Regional / Branch / Area offices

[customer.care@legrand.co.in](mailto:customer.care@legrand.co.in)